



Goblin SPEED Manual





Goblin SPEED Manual

Release 1.0 -December 2013

SAB HELI DIVISION S.R.L.

Via San Crispino, 47

47030 San Mauro Pascoli (FC) - ITALY



The Goblin Speed is the best compromise between a 3D helicopter and a full body, aerodynamically efficient, speed helicopter. The Goblin Speed incorporates all the best parts and components SAB Heli Division has to offer in order to support the most extreme power systems available in the market today. The kit combines incredible design features with good aerodynamic properties.

Please read this user manual carefully, it contains instructions for the correct assembly of the model. Please refer to the web site www.goblin-helicopter.com for updates and other important information.

VERY IMPORTANT

Inside Box 5, you will find Bag 21. This bag contains your serial number tag. Please take a moment to register your kit online via our web site at:

<http://www.goblin-helicopter.com>

It is extremely important that you take a moment to register your helicopter with us. This is the only way to ensure that you are properly informed about changes to your kit, such as upgrades, retrofits and other important developments. SAB Heli Division cannot be held responsible for issues arising with your model and will not provide support unless you register your serial number.

To mount the serial number tag on your helicopter, please refer to page 31.

Thank you for your purchase, we hope you enjoy your new Goblin helicopter!

SAB Heli Division


INDEX

1 – Serial Number
2 – Important Notes ⚠
 3 – Components and Box
 4 – Carbon frame Assembly
 5 – Transmission Assembly
 6 – Main rotor

7 – Assembling The Modules
 8 – Installation of Swashplate Servos
 9 – Installation of The Motor
 10 – Installation of The ESC
 11 – Installation of Flybarless Unit and RX
 12 – Tail Assembly

13 – Installation of the Boom, Canopy
 14 – Battery
15 – In flight ⚠
 16 – Maintenance
 17 – Exploded Views
 18 – Spare Parts

SPECIFICATIONS

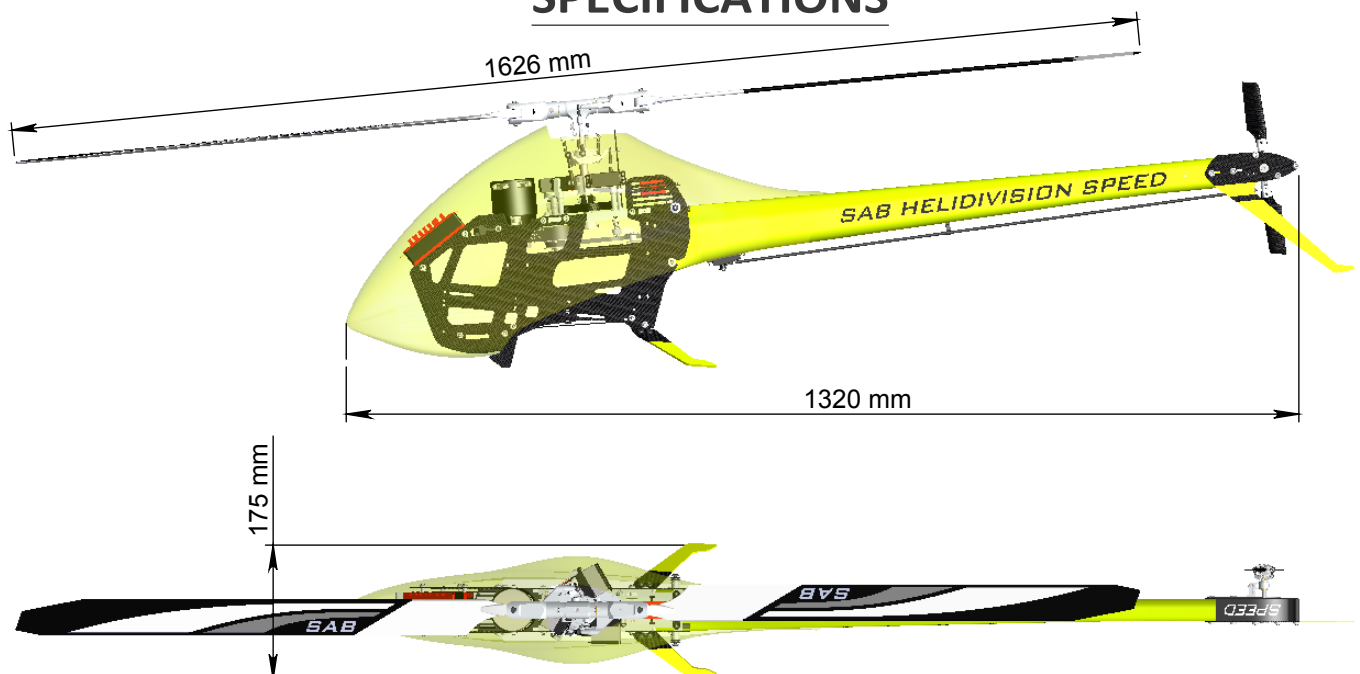

Main rotor diameter: 1626mm (with 720mm blades)
 Main blade length: up to 720mm
 Tail rotor diameter: 283mm
 Tail blade length: 104mm rounded tip (up to 105mm)
 Main shaft diameter: 12mm
 Tail shaft diameter: 6mm
 Spindle diameter: 10mm

Weight including standard electronics: 4010g (excluding batteries).
 Motor size: Maximum 64mm diameter, maximum height 80mm.
 Battery compartment: 75x58x350mm.



IMPORTANT NOTES

- *This radio controlled helicopter is not a toy.
- *This radio controlled helicopter can be very dangerous.
- *This radio controlled helicopter is a technically complex device which has to be built and handled very carefully.
- *This radio controlled helicopter must be built following these instructions. This manual provides the necessary information to correctly assemble the model. It is necessary to carefully follow all the instructions.
- *Inexperienced pilots must be monitored by expert pilots.
- *All operators must wear safety glasses and take appropriate safety precautions.
- *A radio controlled helicopter must only be used in open spaces without obstacles, and far enough from people to minimize the possibility of accidents or of injury to property or persons.
- *A radio controlled helicopter can behave in an unexpected manner, causing loss of control of the model, making it very dangerous.
- *Lack of care with assembly or maintenance can result in an unreliable and dangerous model.

Neither SAB Heli Division nor its agents have any control over the assembly, maintenance and use of this product. Therefore, no responsibility can be traced back to the manufacturer. You hereby agree to release SAB Heli Division from any responsibility or liability arising from the use of this product.

SAFETY GUIDELINES

- *Fly only in areas dedicated to the use of model helicopters.
- *Follow all control procedures for the radio frequency system.
- *It is necessary that you know your radio system well. Check all functions of the transmitter before every flight.
- *The blades of the model rotate at a very high speed; be aware of the danger they pose and the damage they may cause.
- *Never fly in the vicinity of other people.






NOTES FOR ASSEMBLY

Please refer to this manual for assembly instructions for this model.

Follow the order of assembly indicated. The instructions are divided into chapters, which are structured in a way that each step is based on the work done in the previous step. Changing the order of assembly may result in additional or unnecessary steps.

Use thread lockers and retaining compounds as indicated. In general, each bolt or screw that engages with a metal part requires thread lock.

It is necessary to pay attention to the symbols listed below:

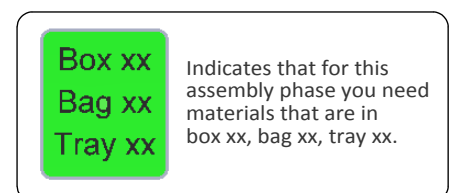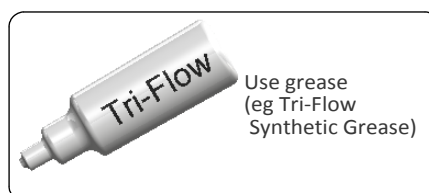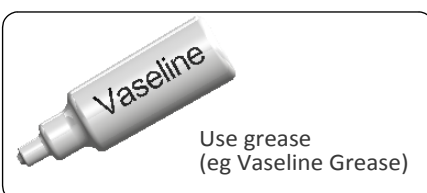



ADDITIONAL COMPONENTS REQUIRED

*Electric Motor: 12S-520/650Kv, 14S-450/580Kv
 Maximum diameter 64mm,
 Maximum height 80mm,
 Pinion shaft diameter 6/8mm

*Speed controller: minimum 160A to be safe


*Batteries: 12S-5000mAh or 14S-4500mAh
 *1 flybarless 3 axis control unit
 *Radio power system, if not integrated with the ESC
 *3 cyclic servos
 *1 tail rotor servo
 *6 channel radio control system on 2.4 GHz

TOOLS, LUBRICANTS, ADHESIVES

*Generic pliers
 *Hexagonal driver, size 1.5,2,2.5,3,4mm
 *4mm T-Wrench
 *5.5mm Socket wrench (for M3 nuts)
 *8mm Hex fork wrench (for M5 nuts)
 *Medium threadlocker (eg. Loctite 243)
 *Strong retaining compound (eg. Loctite 648)
 *Spray lubricant (eg. Try-Flow Oil)
 *Synthetic grease (eg. Tri-Flow Synthetic Grease)
 *Grease (eg. Vaseline grease)
 *Cyanoacrylate adhesive

*Pitch Gauge (for set-up)
 *Soldering equipment (for motor wiring)

Inside the main box there are:

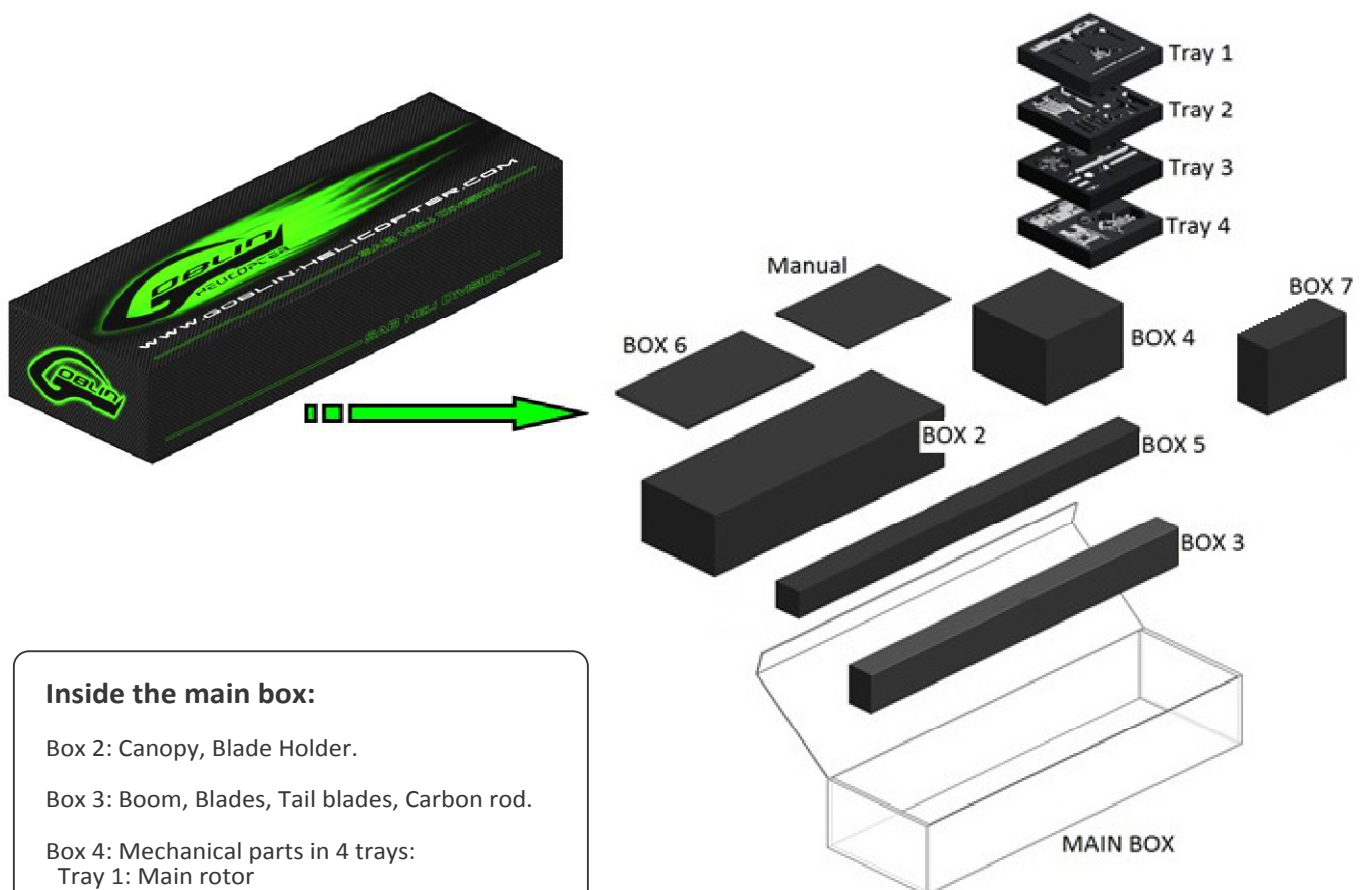

Inside the main box:

Box 2: Canopy, Blade Holder.

Box 3: Boom, Blades, Tail blades, Carbon rod.

Box 4: Mechanical parts in 4 trays:
 Tray 1: Main rotor
 Tray 2: Carbon frame and tail rotor
 Tray 3: Transmission
 Tray 4: Main structure

Box 5: Bags


Box 6: Carbon parts


Box 7: Carbon parts

The assembly process is described in the following chapters. Each chapter provides you with the box, bag and/or foam tray numbers you will need for that chapter. The information is printed in a green box in the upper right hand corner of the page at the beginning of every chapter.



4-Carbon Frame


 The manufacturing process of the carbon parts often leaves micro-burrs and sharp edges. We recommend de-burring the edges to minimize the risks of electrical wire cuts, etc. Very important in red line zone.

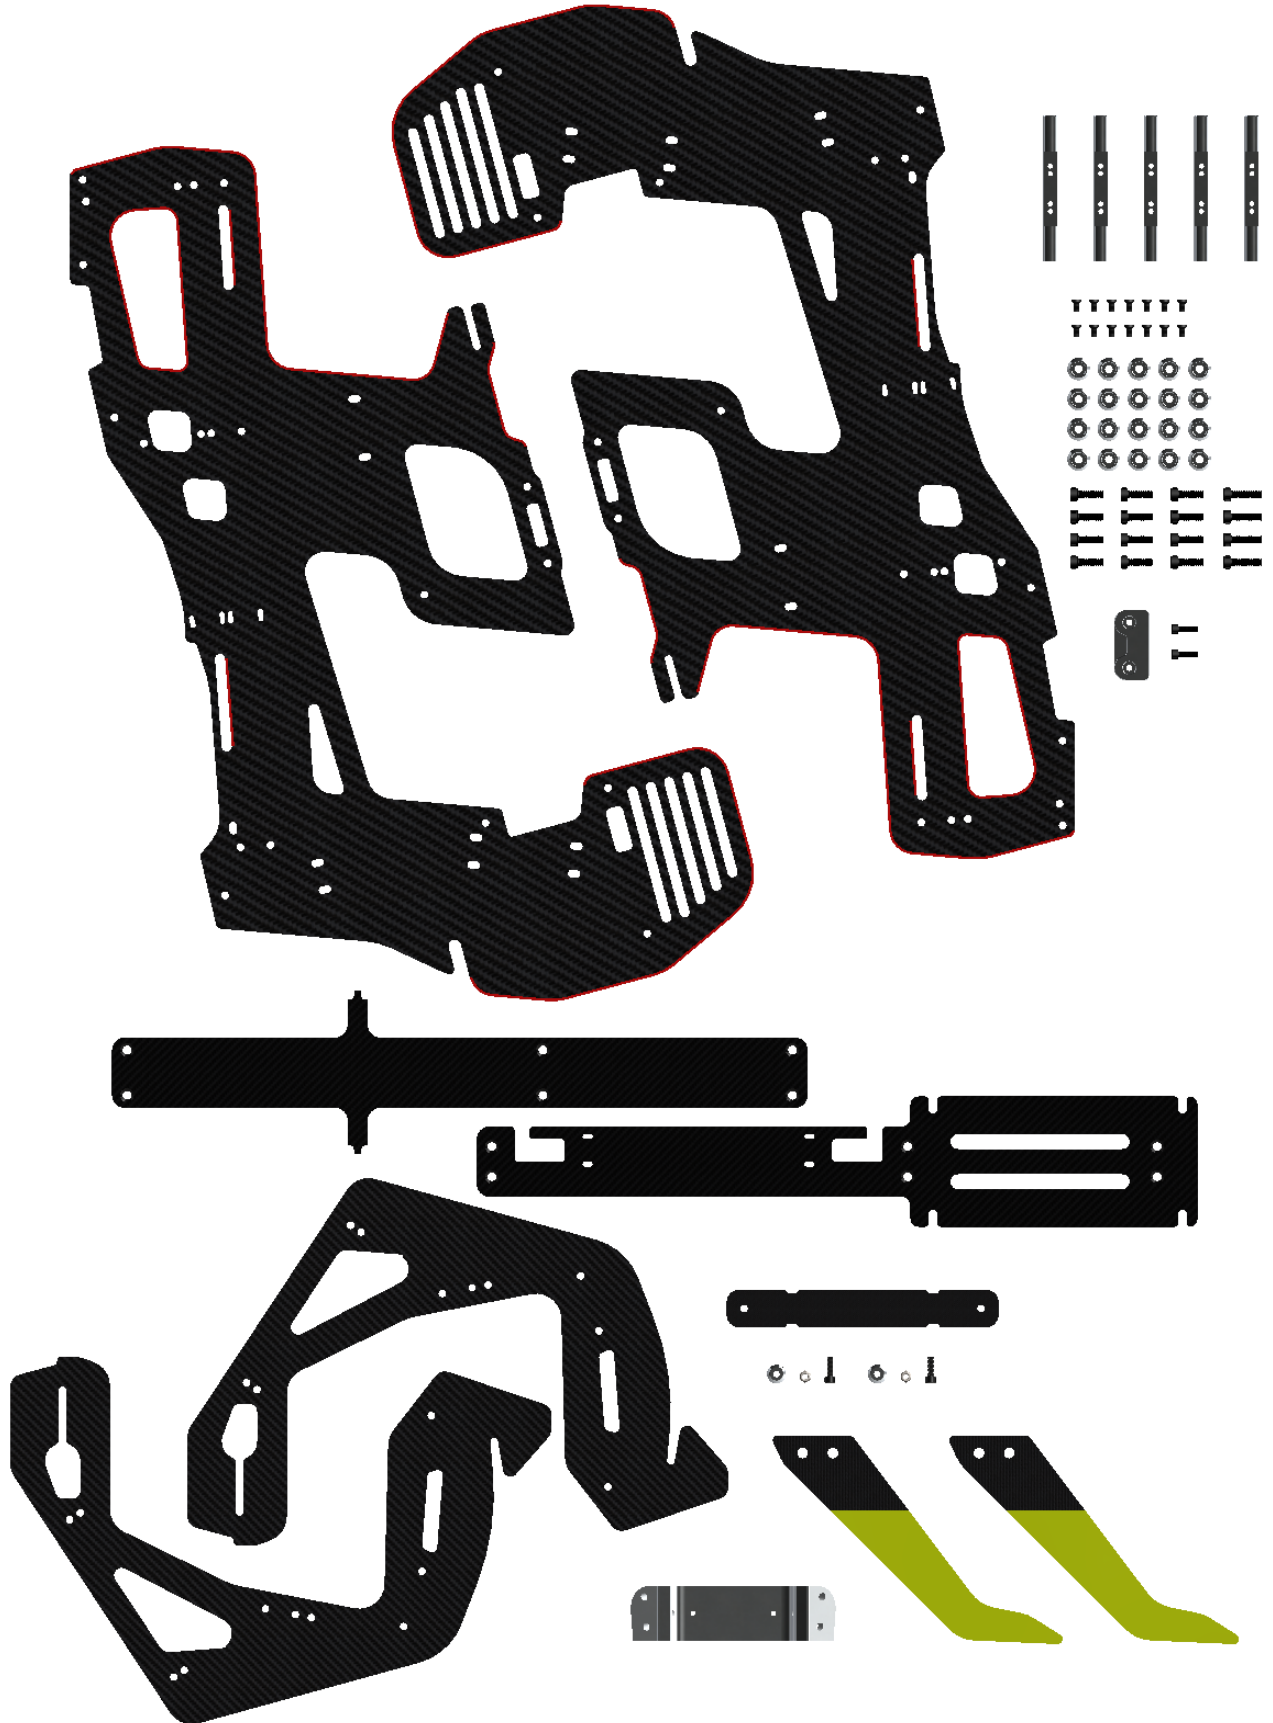





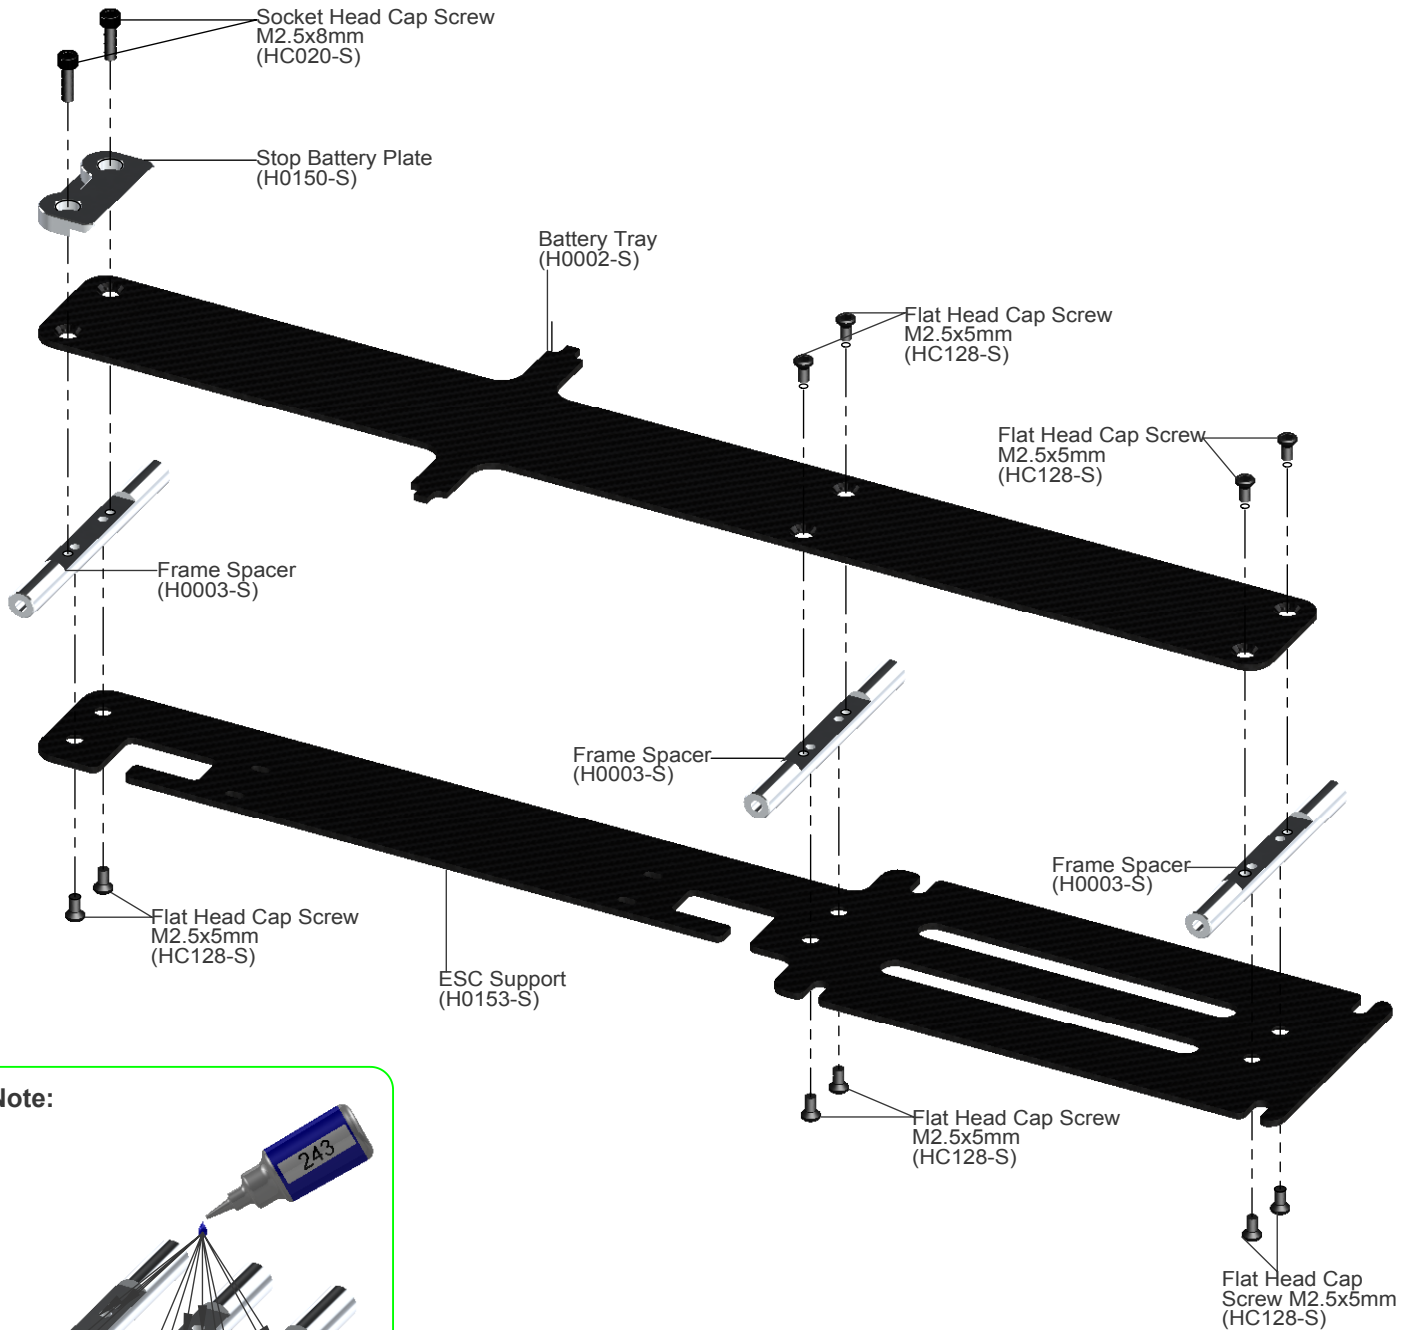



Box 6, Bag 1-1, Tray 2

Battery Support Assembly




- Socket Head Cap Screw M2.5x8mm


x2
- Flat Head Cap Screw M2.5x5mm

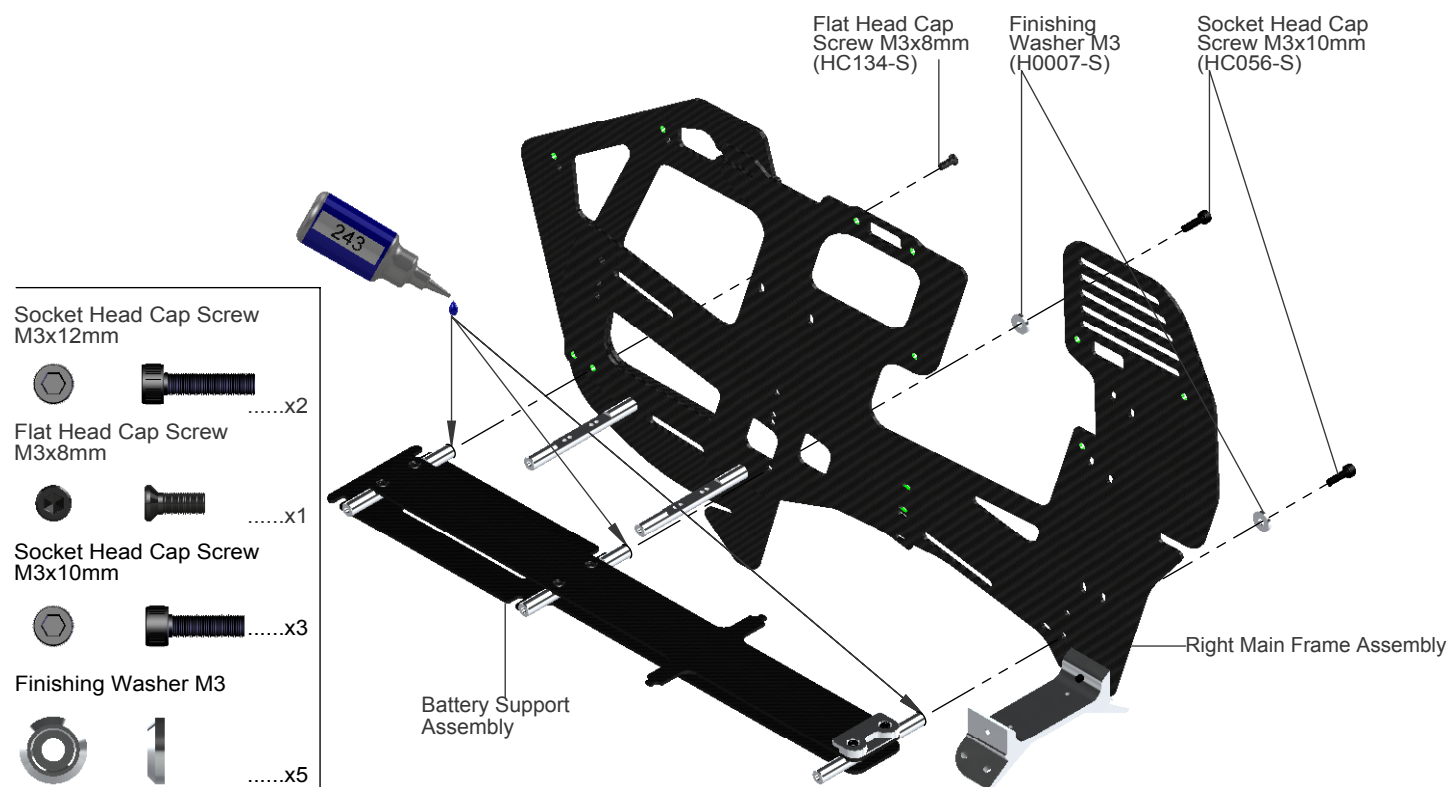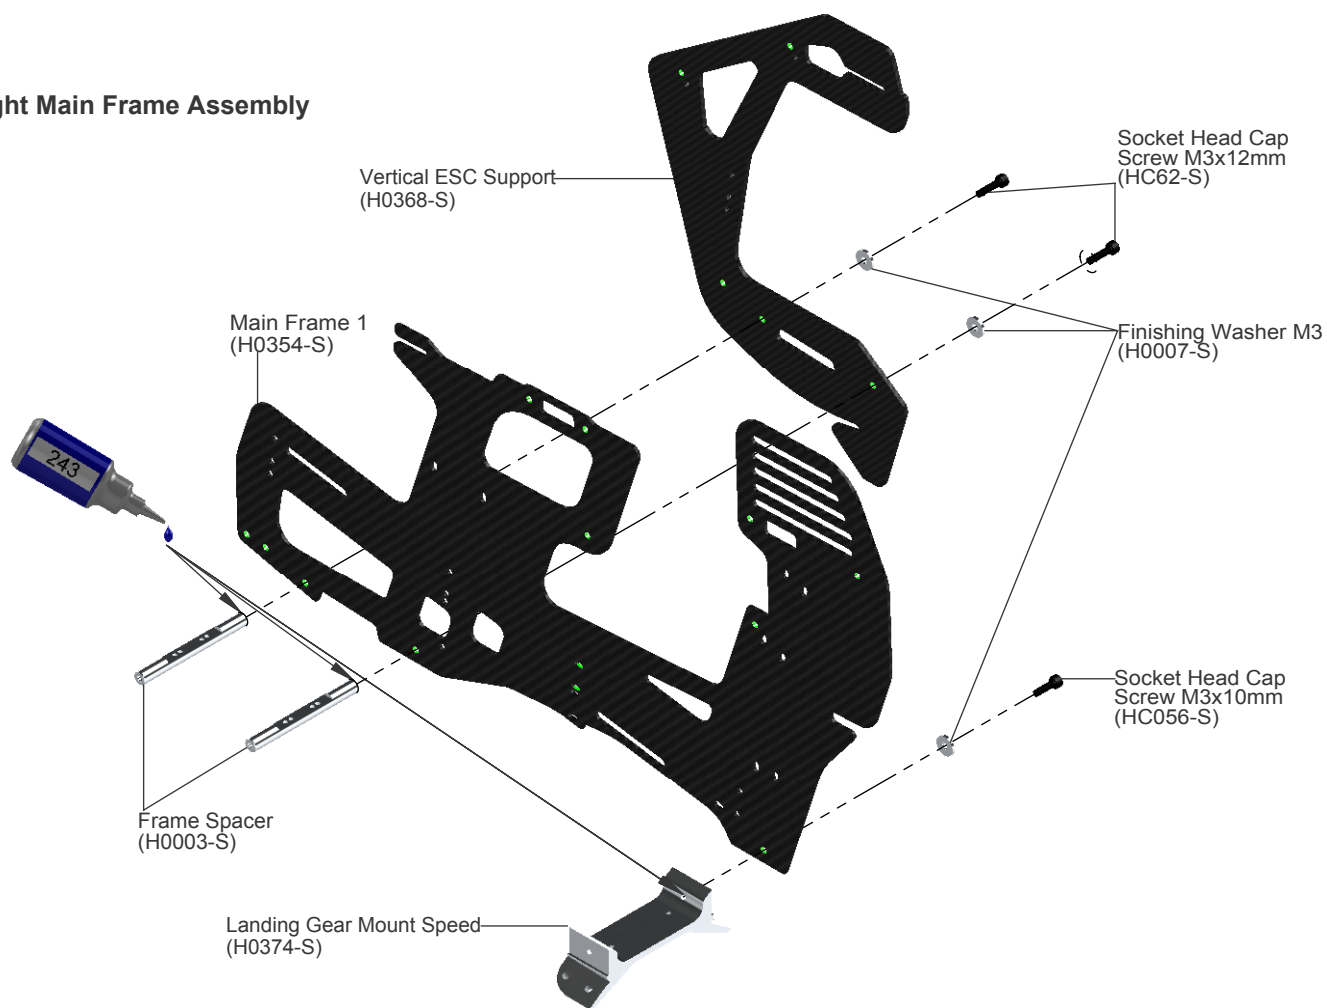
x10

Right Main Frame Assembly



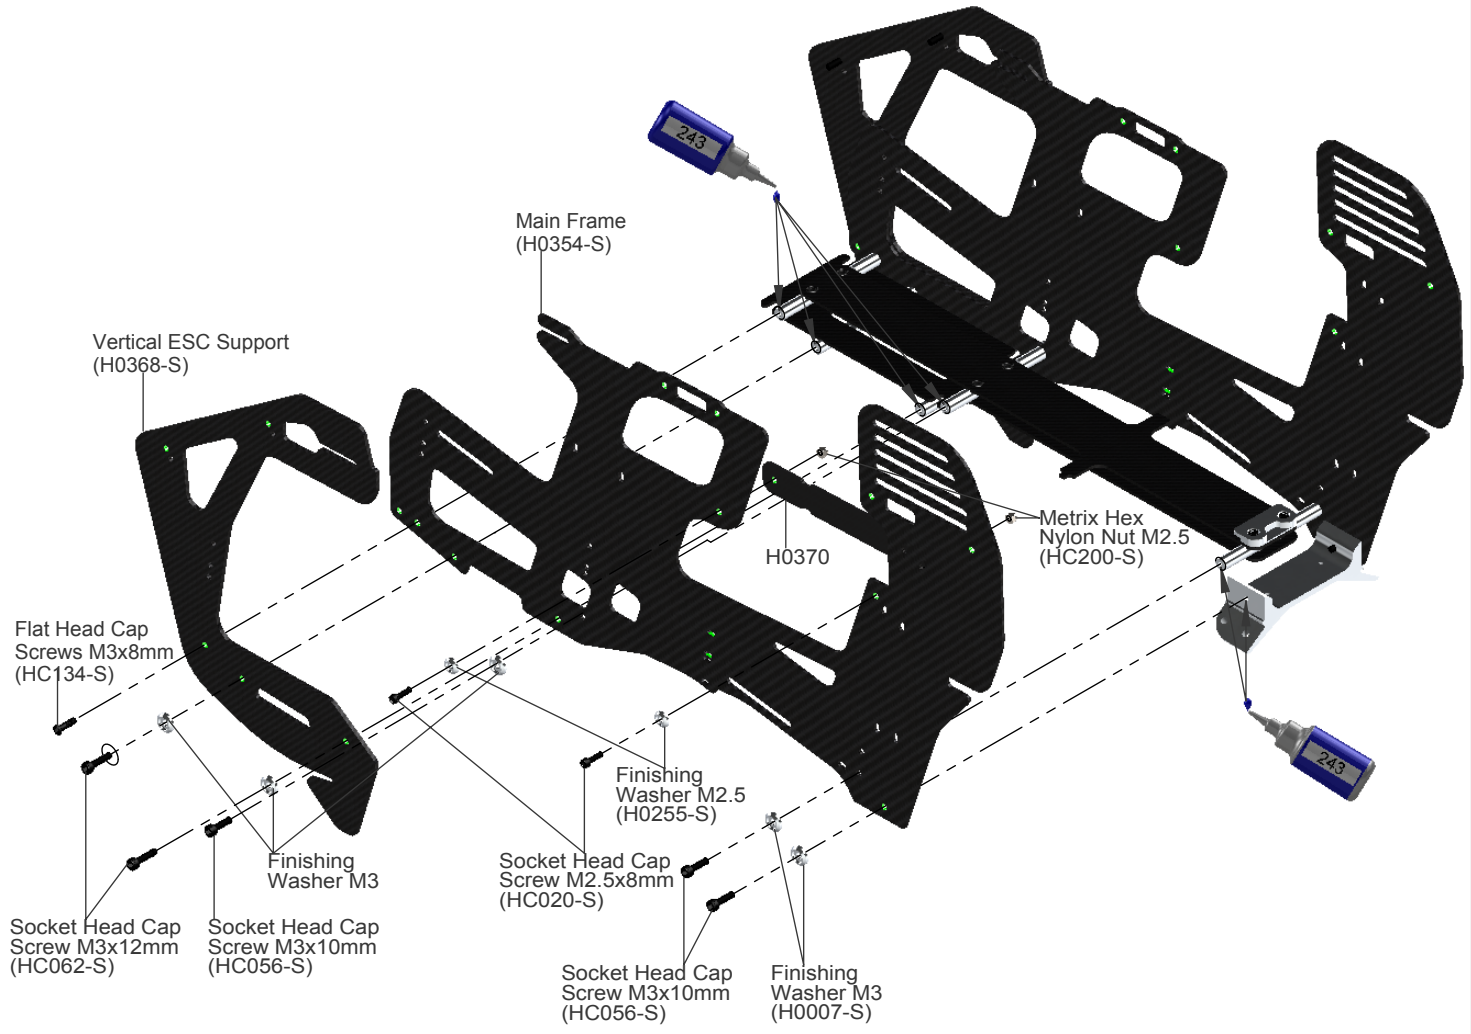


Box 6, Bag 1-2;1-3



Bag 2

- Finishing Washer M2.5 x2
- Socket Head Cap Screw M2.5x8mm x2
- Flat Head Cap Screws M3x8mm x1
- Bottom Head Cap Screw M4x8mm x4
- Socket Head Cap Screw M3x10mm x3
- Finishing Washer M3 x5
- Socket Head Cap Screw M3x12mm x2
- Metrix Hex Nylon Nut M2.5 x2

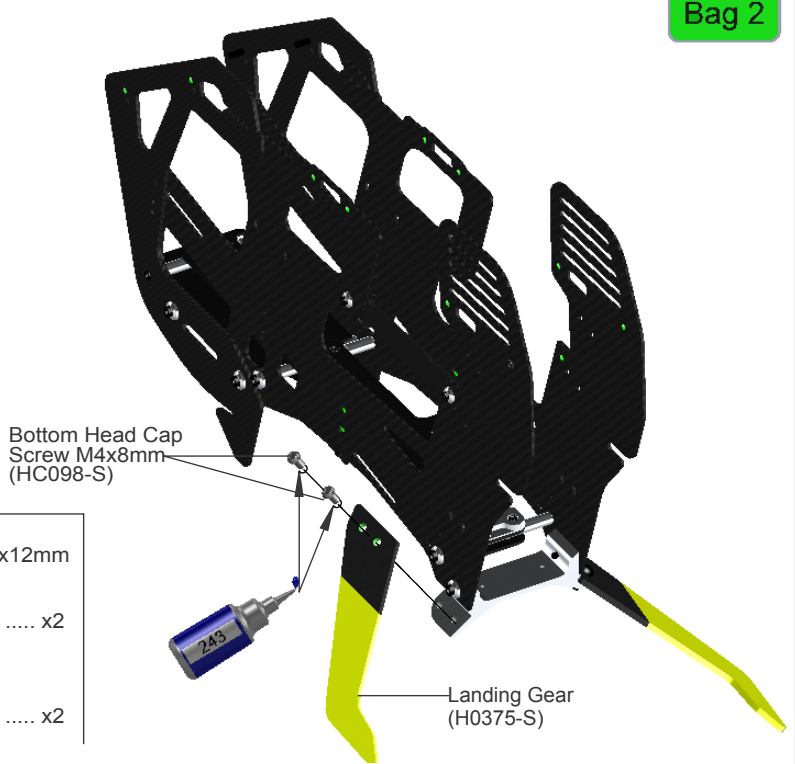




5 - Transmission Assembly






SAB HELI DIVISION

Bag 3, Tray 3, Tray 4

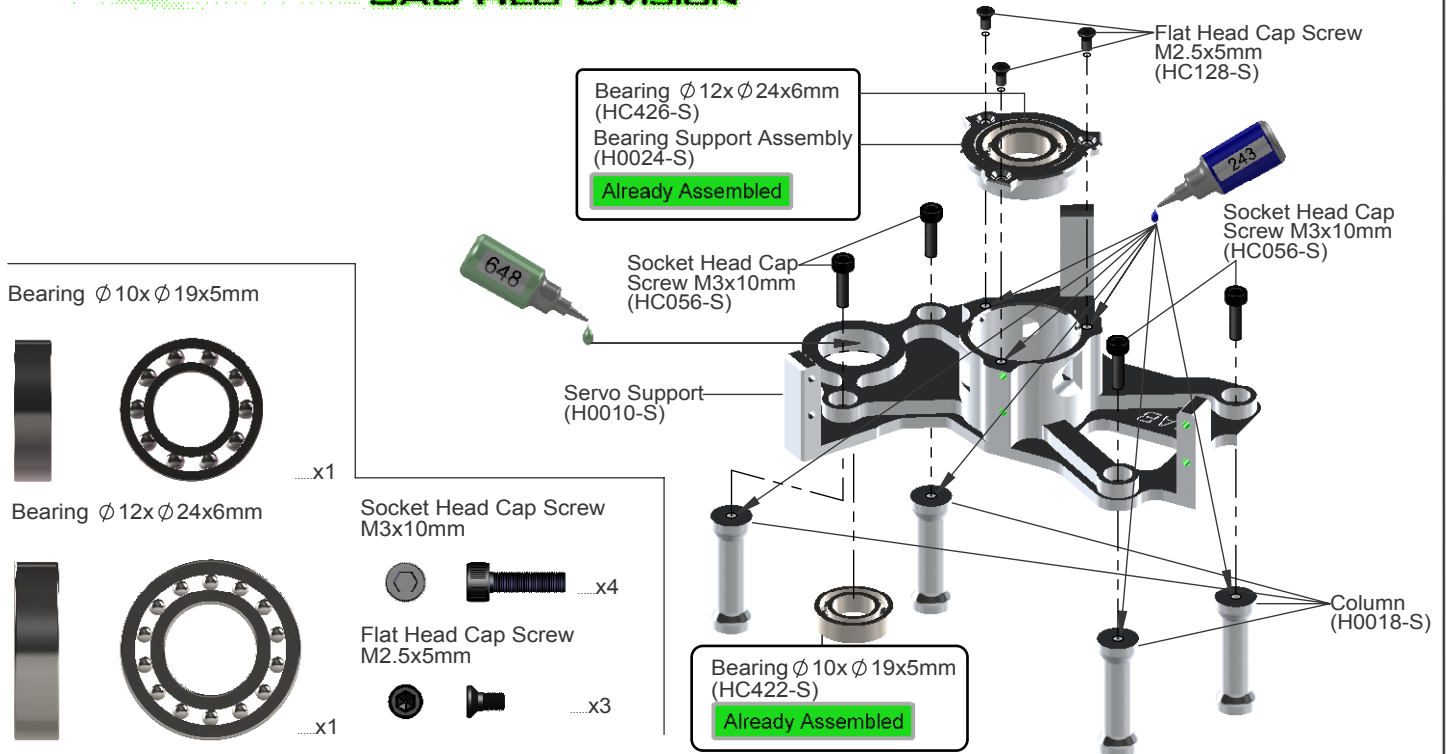

Note:

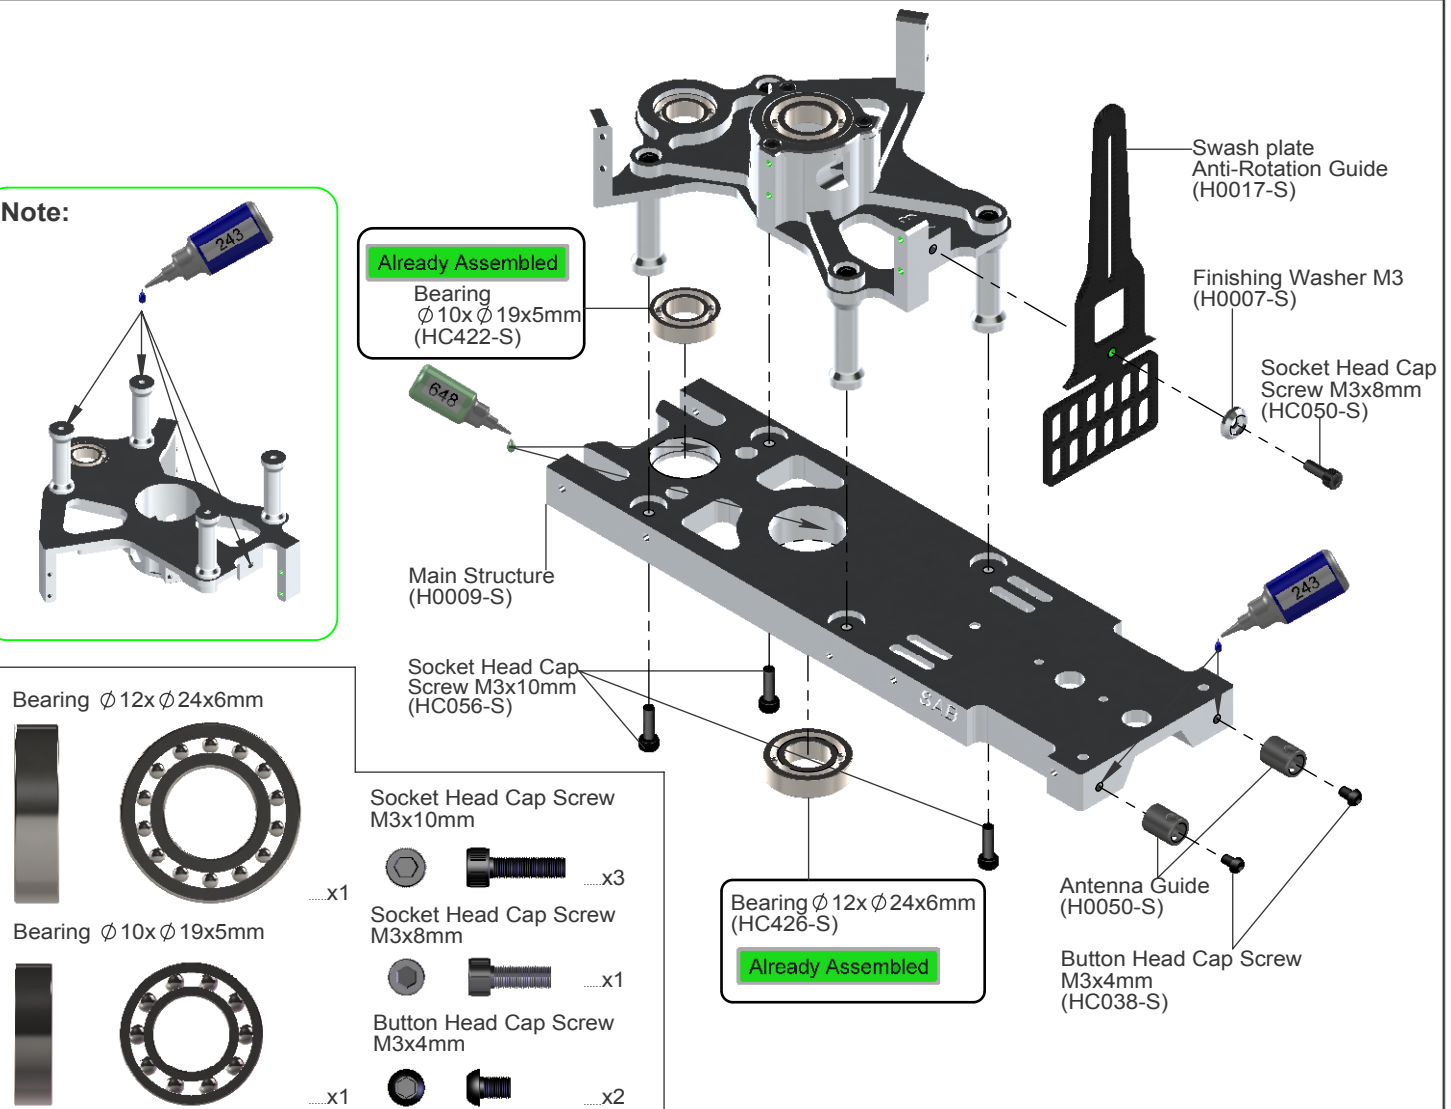

SAB HELI DIVISION




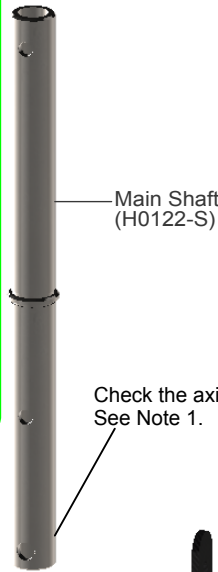
Bag 4, Tray 1, Tray 3

Note 1: When you tighten the collar (H0121-S) on the main shaft, ensure there is no axial play. Push down the main shaft while pulling up the locking collar. Tighten the screw M4x22 at this time.


Note 2:

The pinion and gear are designed to have zero backlash. This leads to initial "rough" rotation. After some run in flights (3-5 flights) it will begin to rotate freely, ensuring perfect contact and the ability to transmit maximum power.





It is very important to lubricate these two elements with a lubricant (Tri-Flow Synthetic grease). 







Check the axial play See Note 1.






Note 2



Note: Correct insertion of the one-way pulley



The perfect play is 0.5mm add or remove shim for this



Metric Hex Nylon Nut M2.5



Socket Head Cap Screw Shouldered M2.5x19mm



Socket Head Cap Screw M4x22mm



Metric Hex Nylon Nut M4



Socket Head Cap Screw Shouldered M4x24mm




Socket Head Cap Screw M2x5mm



60T Pulley Assembly (H0171-S)

Already Assembled

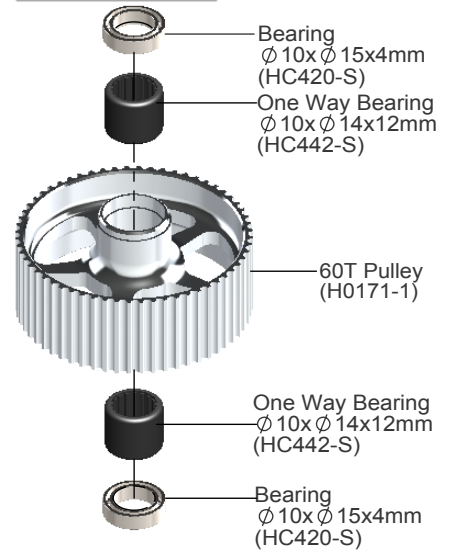

Front Tail Pulley Assembly (H0172-S)


Socket Head Cap Screw M2x12mm (HC014-S)

37T Pulley (H0172-S)



Tail Belt Idler Assembly (H0174-S)

Already Assembled




Flanged Bearing
Ø3xØ7x3mm
(HC402-S)

Tail Belt Idler


Belt Tensioner Arm Assembly (H0174-S)

Already Assembled

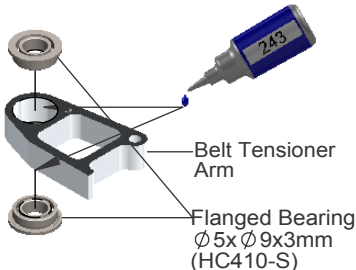

Belt Tensioner Arm

Flanged Bearing
Ø5xØ9x3mm
(HC410-S)

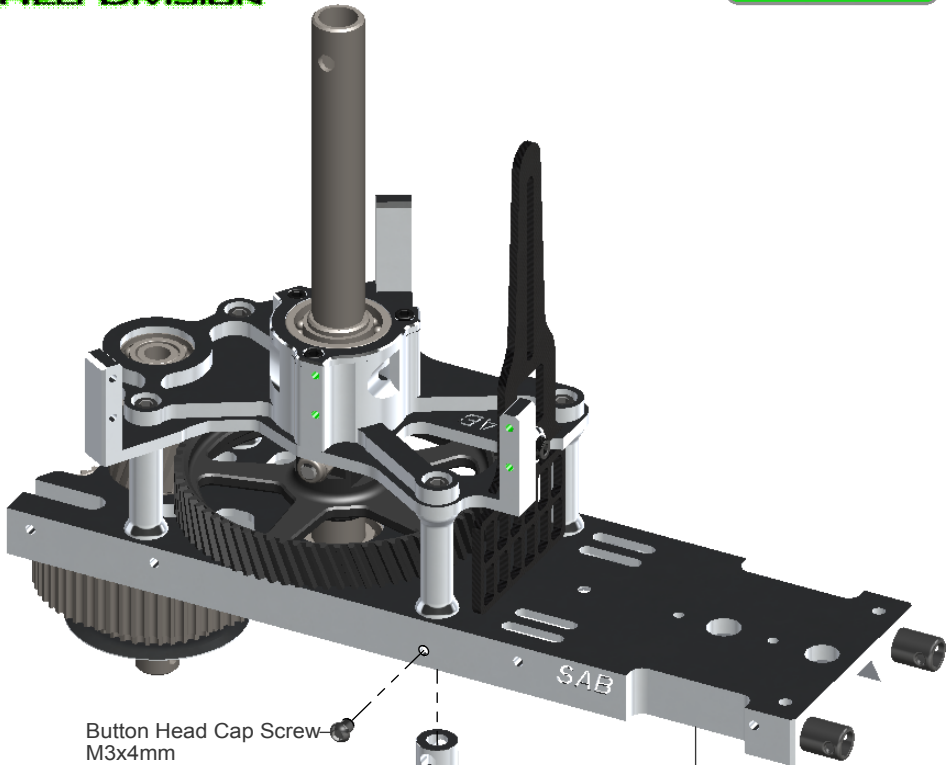

Button Head Cap Screw
M3x4mm
(HC038-S)

Belt Tensioner Support
(H0174-S)

Spring
de 8 / df0.5 / LL8
(HC315-S)

Belt Tensioner Arm
Assembly
(H0174-S)

Washer Ø3.2xØ6x0.5mm
(HC180-S)

Socket Head Cap
Screw M3x40mm
(HC091-S)

Main Structure
Assembly 3

Washer Ø3.2xØ6x0.5mm
(HC180-S)

Washer Ø3xØ4x0.5mm
(HC176-S)

Tail Belt Idler Assembly
(H0174-S)

Socket Head Cap
Screw M3x12mm
(HC062-S)

Button Head Cap Screw M3x4mm



Socket Head Cap Screw M3x12mm



Socket Head Cap Screw M3x40mm




Flanged Bearing Ø5xØ9x3mm



Flanged Bearing Ø3xØ7x3mm



Washer Ø3xØ4x0.5mm


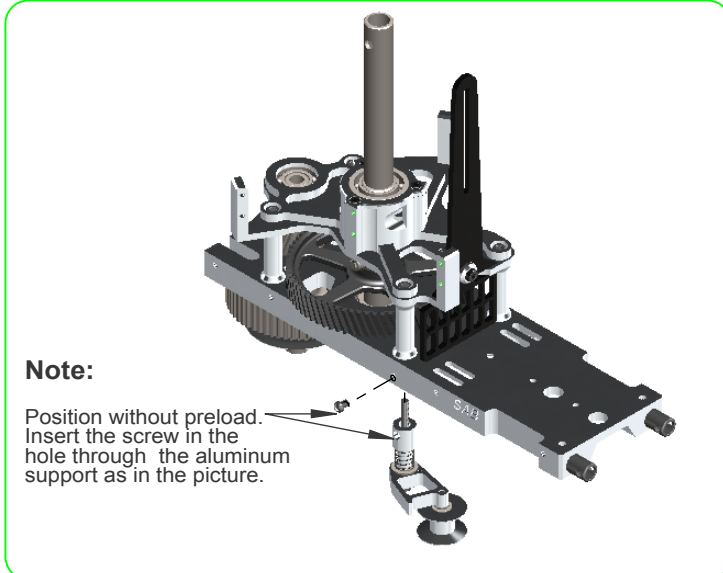


Note:

Position without preload. Insert the screw in the hole through the aluminum support as in the picture.




SAB HELI DIVISION

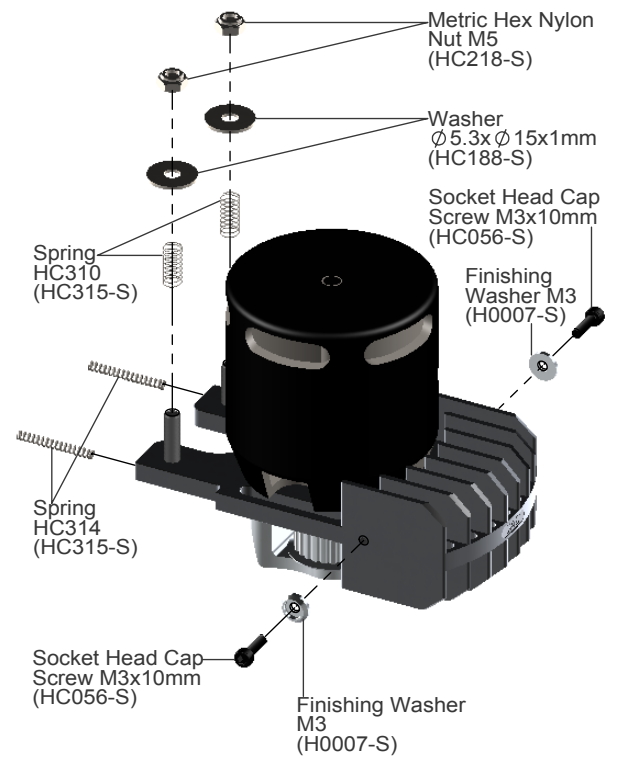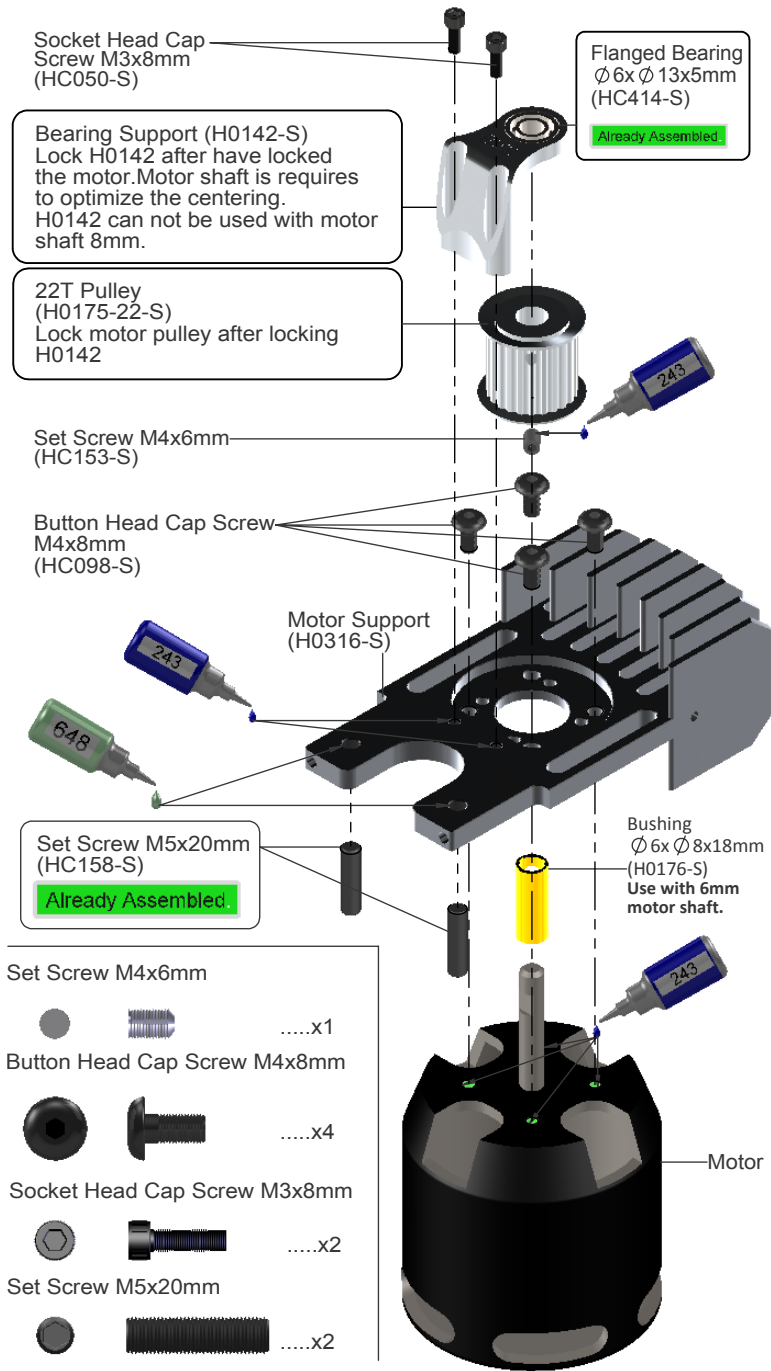

Note for 6mm motor shaft


To maximize space for the batteries, it is advisable to shorten the motor shaft. Follow the dimensions given in this drawing. For the cut, you can use an electric tool like a "Dremel" with a cut-off disc.

Additionally, ensure the motor shaft has an appropriate 'flat' for one of the set screws.

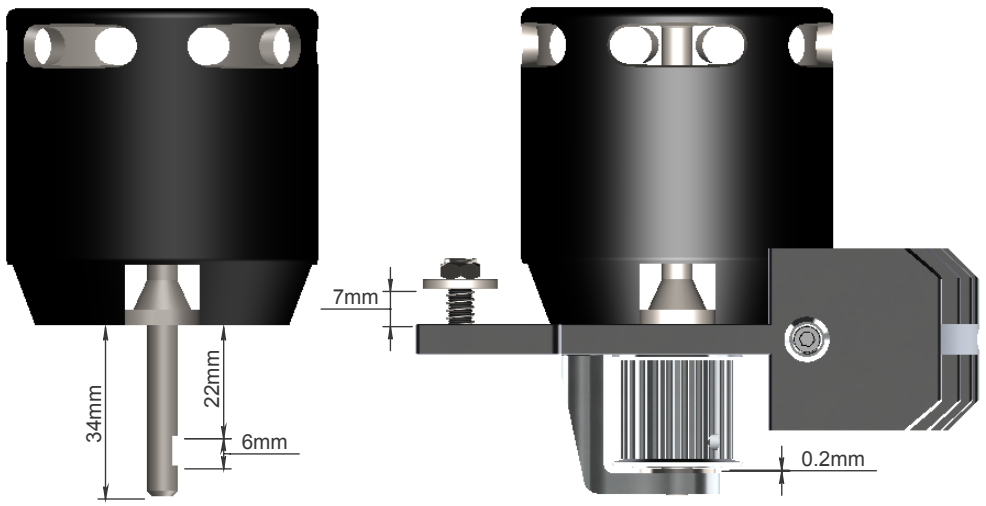




6 - Main Rotor

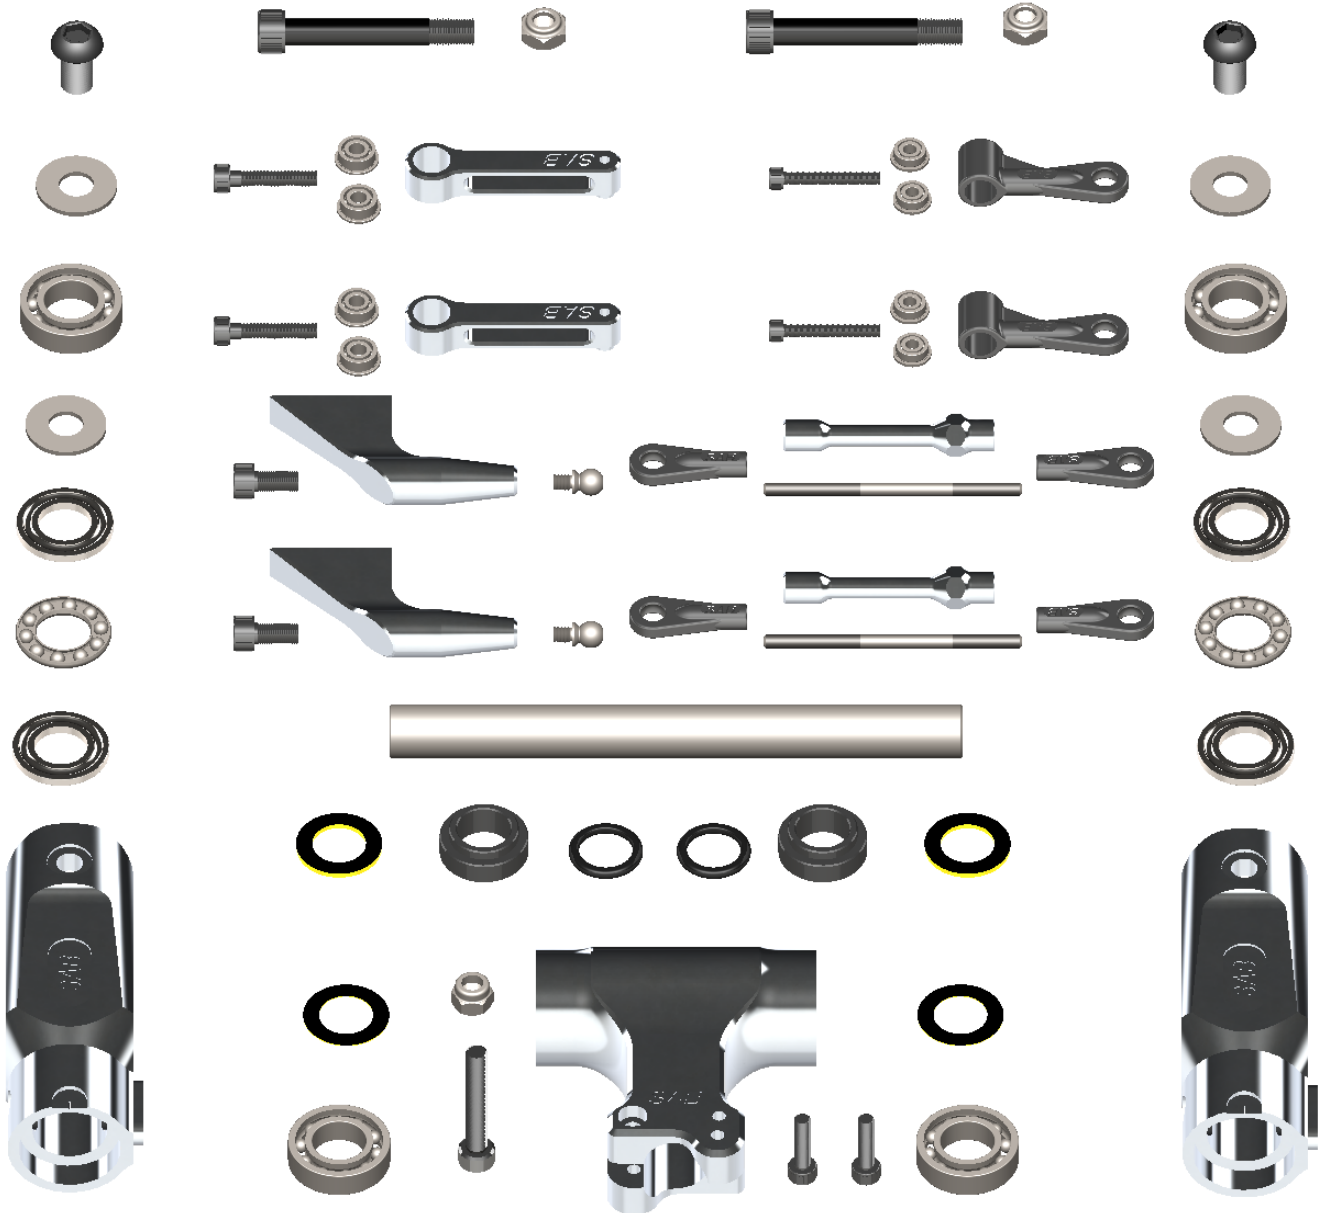




Bag 7, Tray 1


Uniball Radius Arm... x2 Assembly

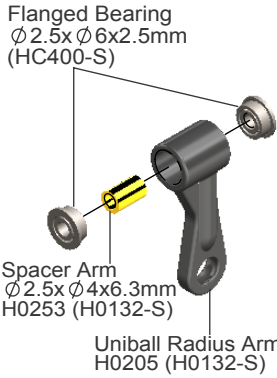

Radius Arm ... x2 Assembly

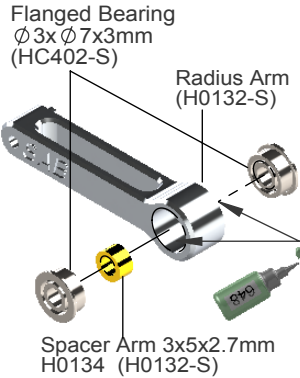


Center Hub Assembly

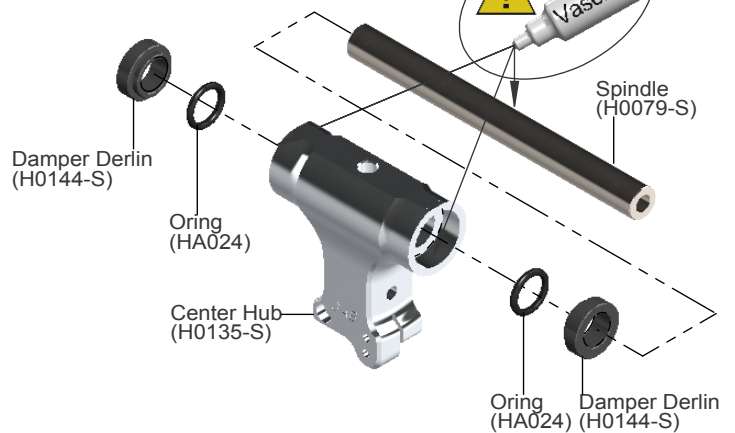



Note:

The main rotor is assembled provisionally without loctile. Need to add Loctile 243 in the screws M4x10 and M6x10.

Swashplate Assembly


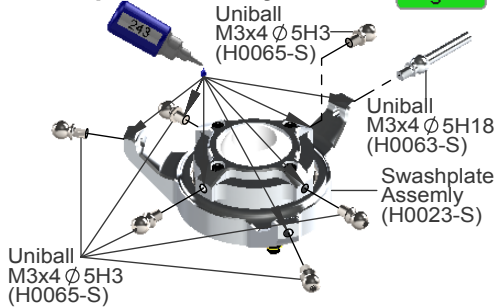


Main Blade Grip Assembly...x2

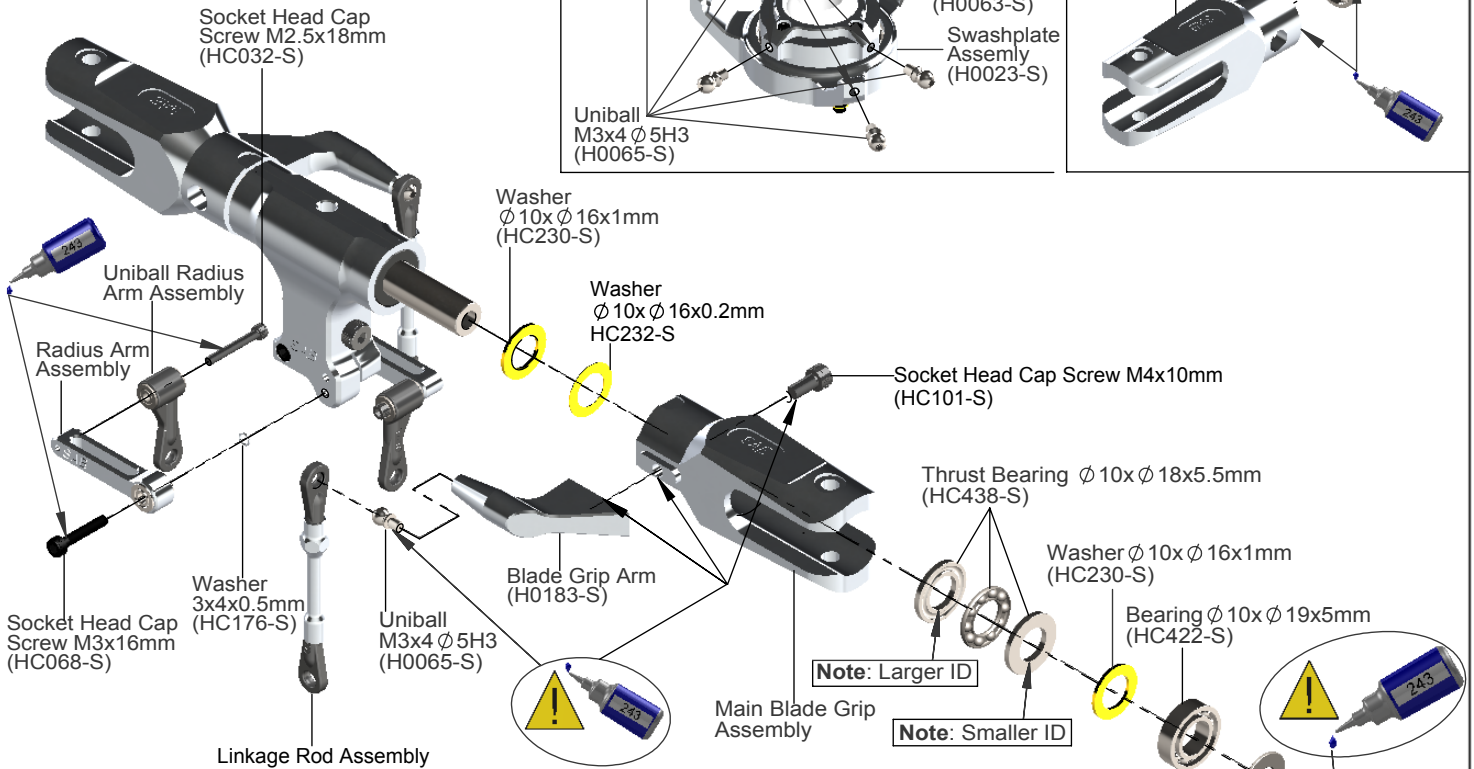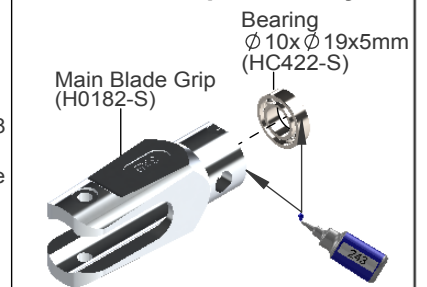

Linkage Rod A Assembly ...x2


Bag 7-3

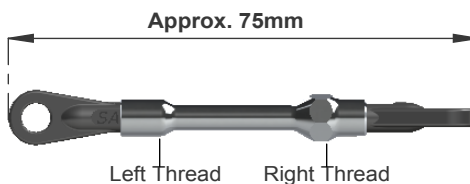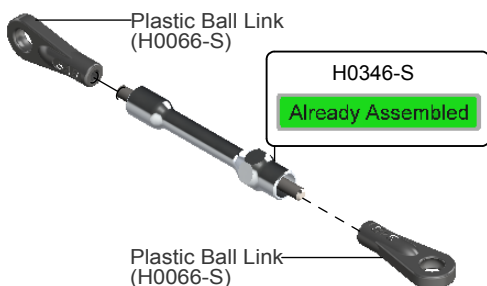

(Initial length for the rods from the swash plate to the Blade Grip.)






Tray 5, Bag 8

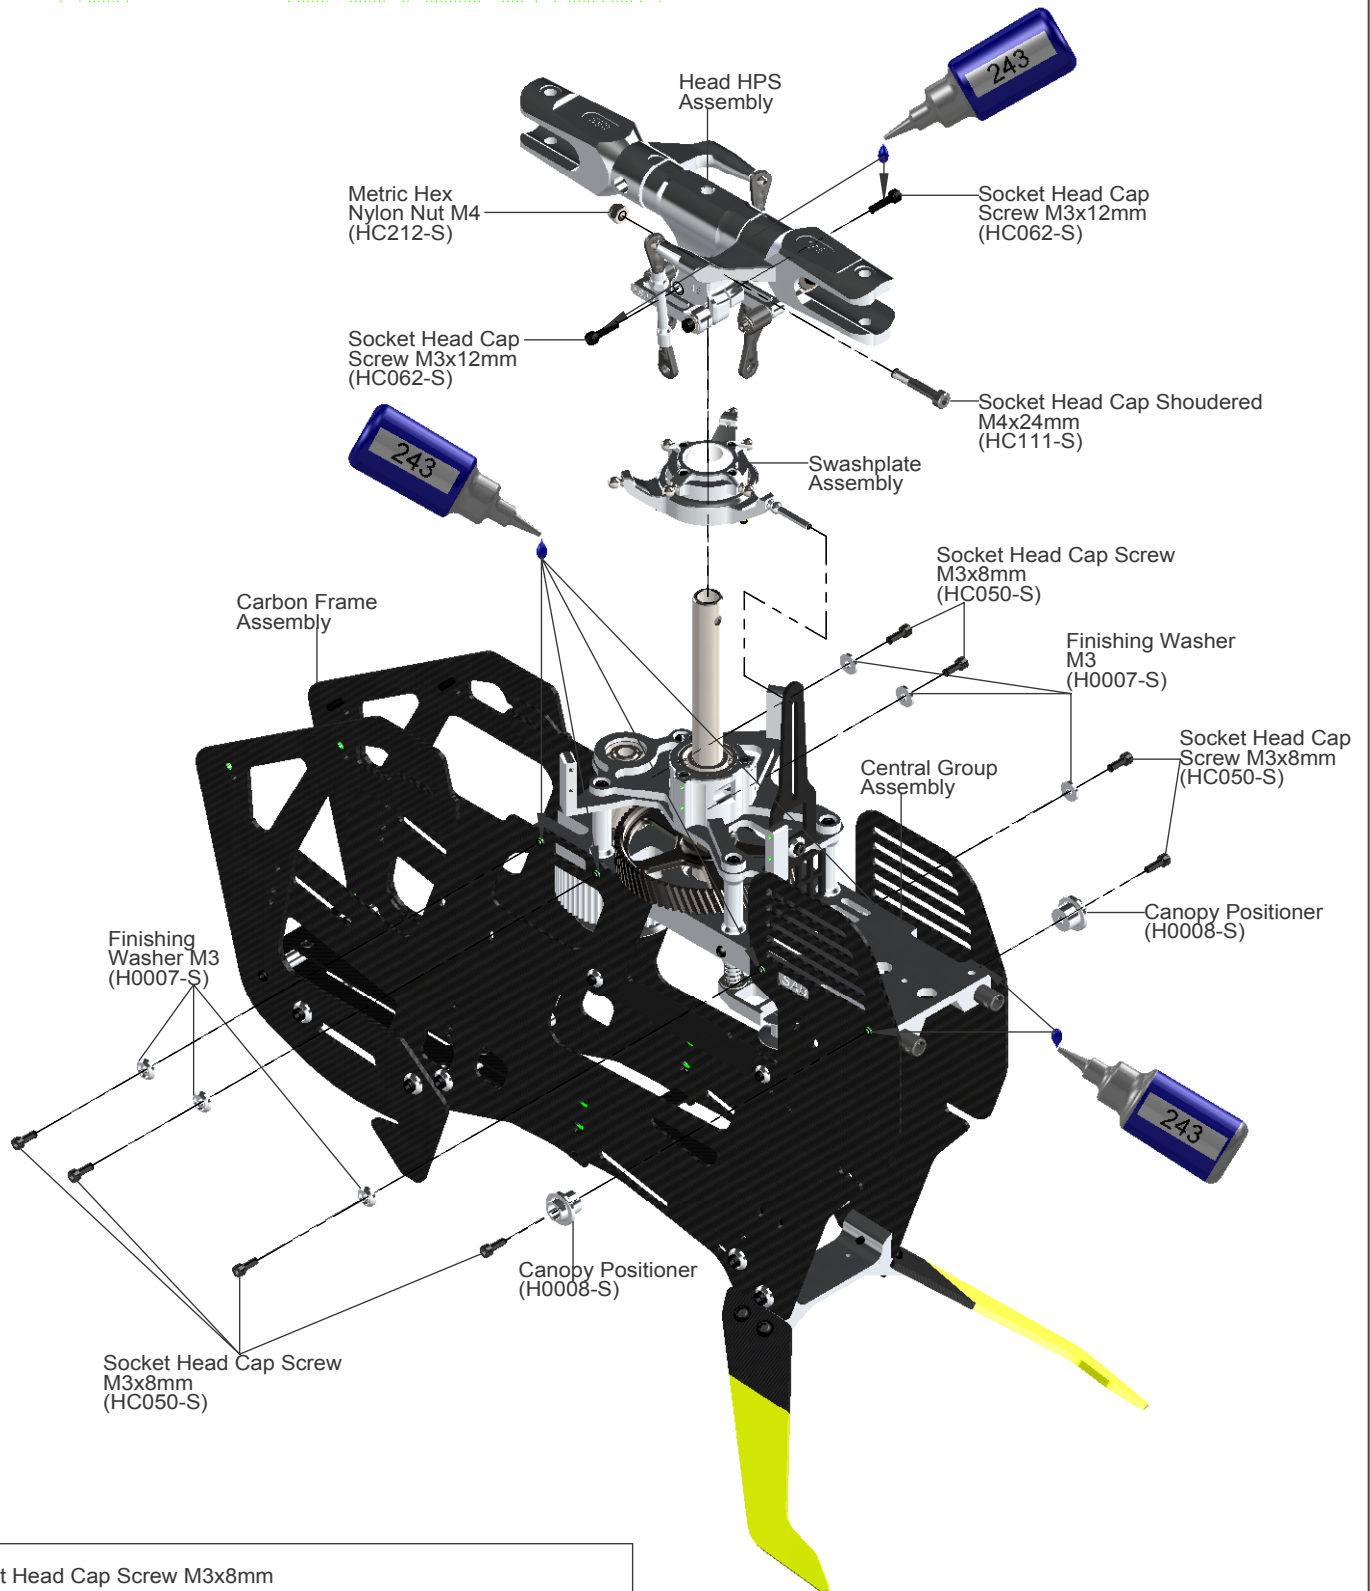

Socket Head Cap Screw M3x8mm	x6	Finishing Washer M3	x6
Socket Head Cap Screw M3x12mm	x2	Metric Hex Nylon Nut M4	x1
Socket Head Cap Screw M4x24mm	x1			


INSTALLATION OF SWASHPLATE SERVOS

The linkage ball must be positioned between **17-19 mm** out on the servo arm (**figure 1**). The 120° placement of the servos inside Goblin means the arms are difficult to access. For this reason it is advisable to ensure alignment of the servo arms (and sub trim set) before installation of the servos in the model (**figure 2**). Proceed with installation following the instructions below. **Figure 3** shows a completed installation.

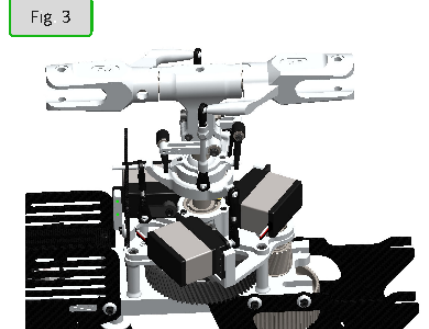
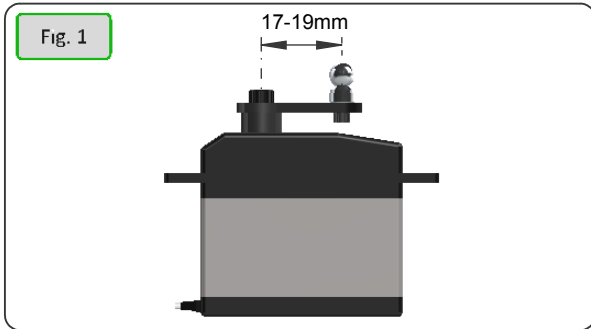


ASSEMBLY OF THE BALL ON THE HORN.

The rods going from the servos to the swash plate must be as vertical as possible. Not all servos are equal, so to better align them you can choose to use the supplied spacer H0031. Figure 4 illustrates this.

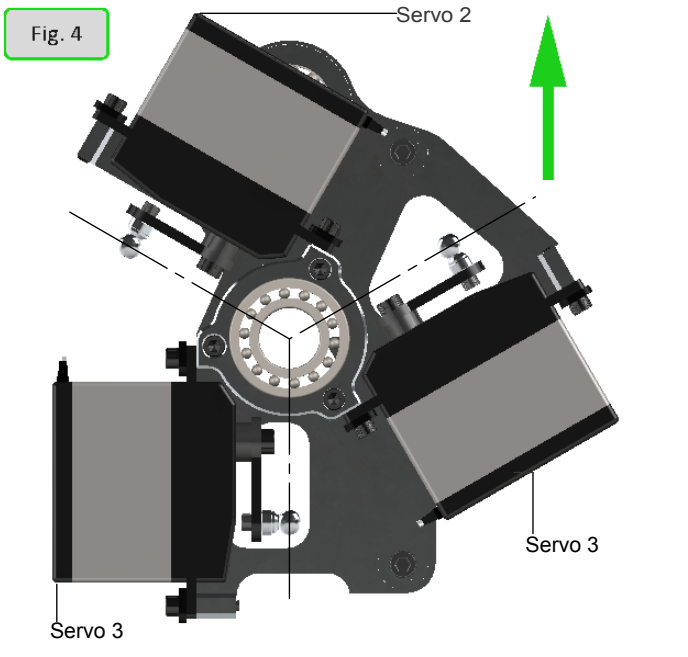

SERVO ASSEMBLY 1, 2, 3

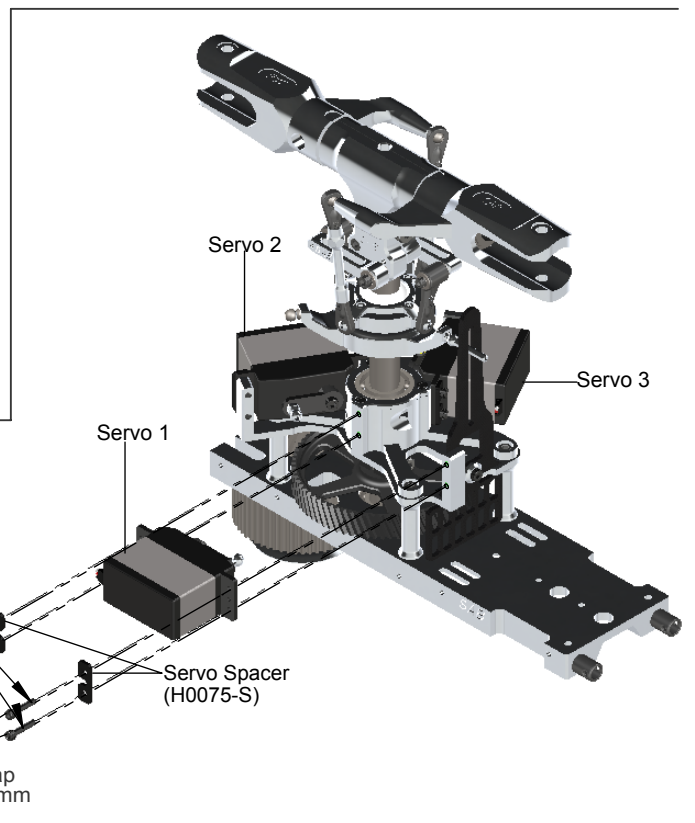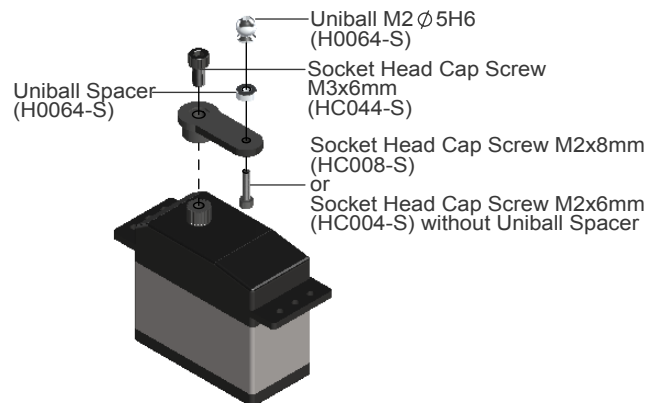

Socket Head Cap Screw M2.5x8mm



Socket Head Cap Screw M2.5x12mm




Socket Head Cap Screw M2.5x8mm (HC020-S)

Socket Head Cap Screw M2.5x12mm (HC026-S)




The wire for the front servo must be positioned here

Fig. 5

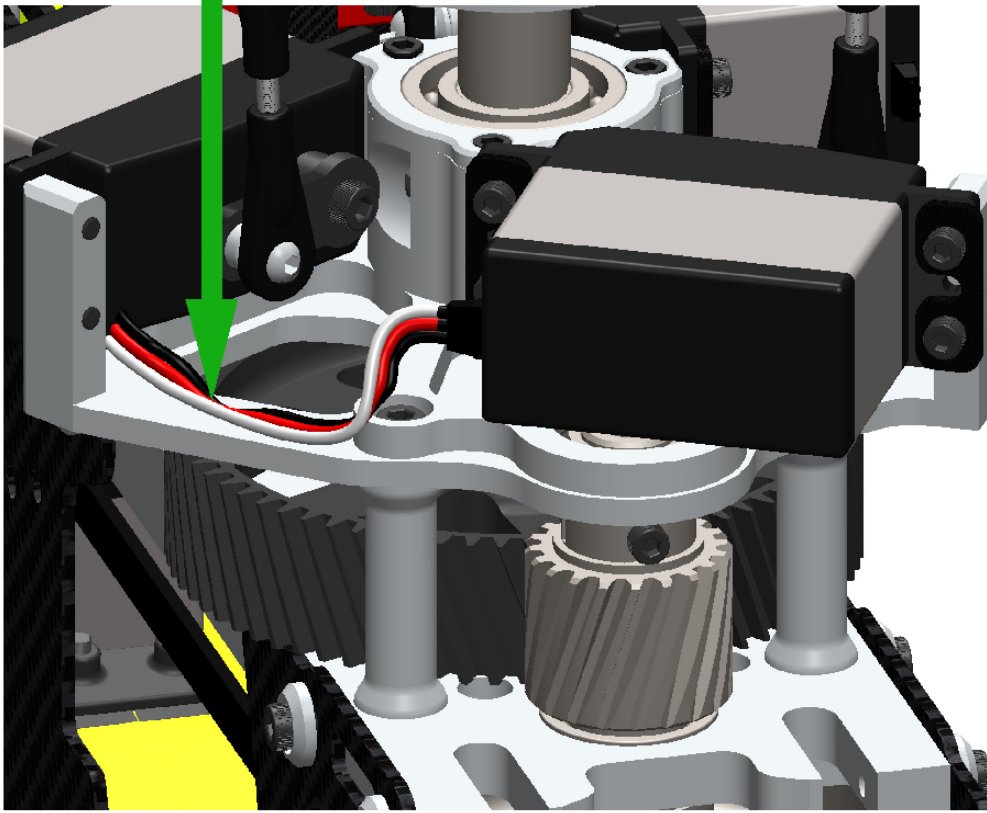


Head HPS Version Preliminary Setup

Adjust the linkage as shown. The linkage Rod A has thread right/left. Turning, you can change the tracking without disconnecting the plastic ball link.

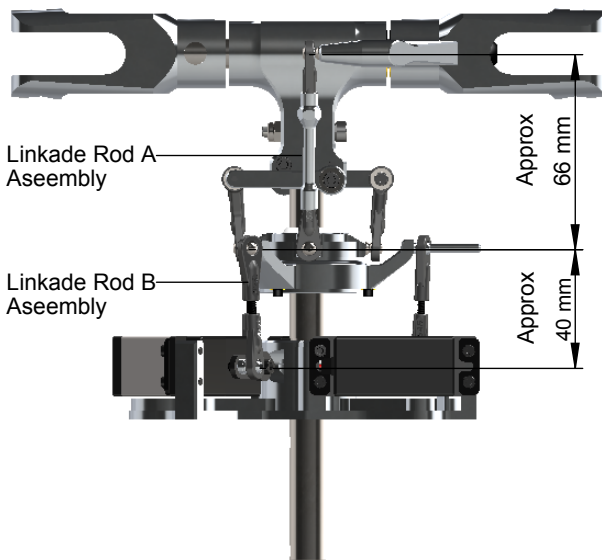


Linkage Rod A Assembly ... x2

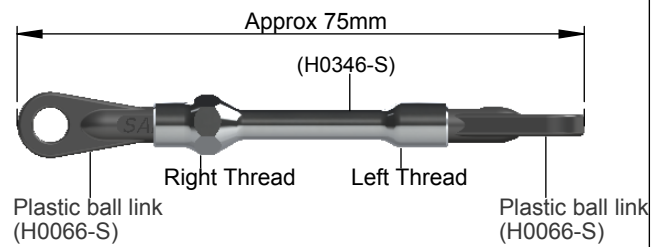

Initial length for the rods from the swashplate to the blade grips.

Linkage Rod B Assembly ... x3

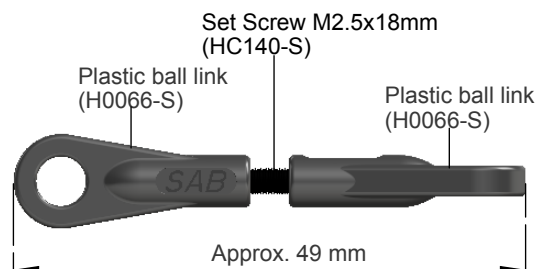

Initial length for the rods from the servos to the swash plate.



TRANSMISSION SETUP

In order to select the correct motor pulley, please read page 32

The Goblin has many possible reduction ratios at your disposal. It is possible to optimize any motor and battery combination. It is recommended to use wiring and connectors appropriate for the currents generated in a helicopter of this class.

If you are using a head speed calculator which requires a main gear and pinion tooth count, use **214** teeth for the main gear (this takes into account the two stage reduction) and the tooth count of your pulley as the pinion count.

Below is a list of available reduction ratios:

H0175-18-S - 18T Pinion = ratio 11.9:1

H0175-22-S - 22T Pinion = ratio 9.8:1

H0175-19-S - 19T Pinion = ratio 11.3:1

H0175-23-S - 23T Pinion = ratio 9.3:1

H0175-20-S - 20T Pinion = ratio 10.7:1



H0175-24-S - 24T Pinion = ratio 8.9:1

H0175-21-S - 21T Pinion = ratio 10.2:1

H0175-25-S - 25T Pinion = ratio 8.6:1

MOTOR BELT TENSION

- *Assemble the motor and pinion to its mounting plate.
- *Fit the motor assembly into position.
- *Compress the springs by pushing the motor toward the main shaft.
- *At maximum compression, temporarily tighten one of the slide screws.
- *With the minimum centre distance it is easy to install the belt. First put the belt on the motor pinion.
- *Then put the belt around the big pulley.
- *Rotate the motor several times by hand.
- *Release the screw that locks the slide.
- *The springs keep the belt in tension.
- *Help the springs by pulling the motor slightly.
- ***The belt must be very tight.**
- *Lock all screws.

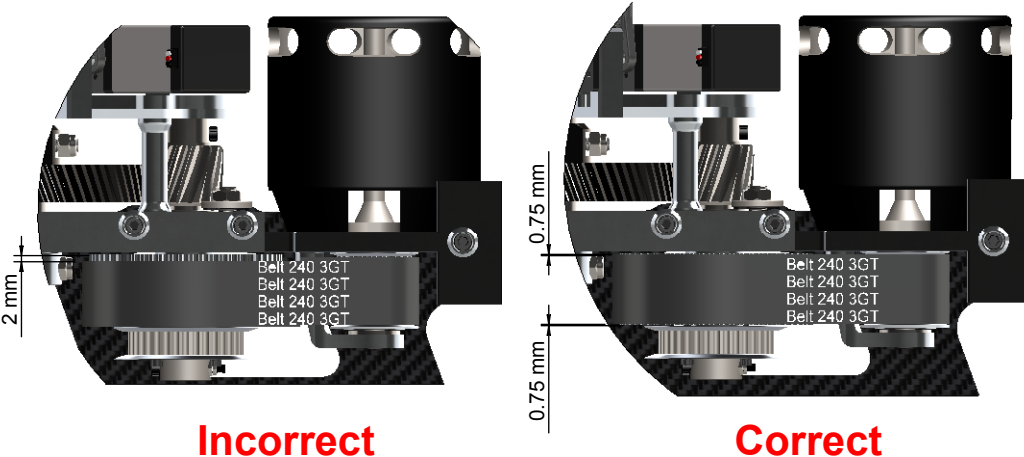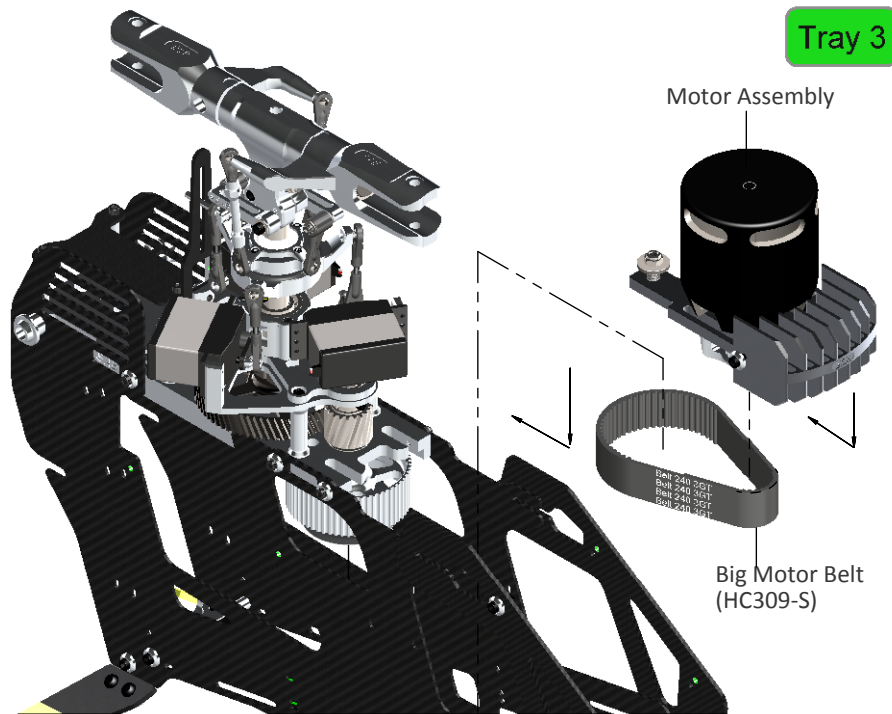

Note:

Check for vertical alignment of the motor pulley. To do this, simply turn the motor several times and check to you see if the belt is aligned with the big pulley (one way bearing pulley). If the belt is riding too high, simply loosen up the motor pulley and drop it just a little bit, if it is riding too low, loosen up the motor pulley and raise it a bit.



DE-BURR THE SIDE FRAMES

We recommend de-burring the edges of the carbon parts in areas where electrical wires run.



ESC INSTALLATION

The speed controller (ESC) is installed in the front of the helicopter.

We recommend to use 6-8 mm connector and correct wires to support high current (>200A)

Bag 9A, Tray 2

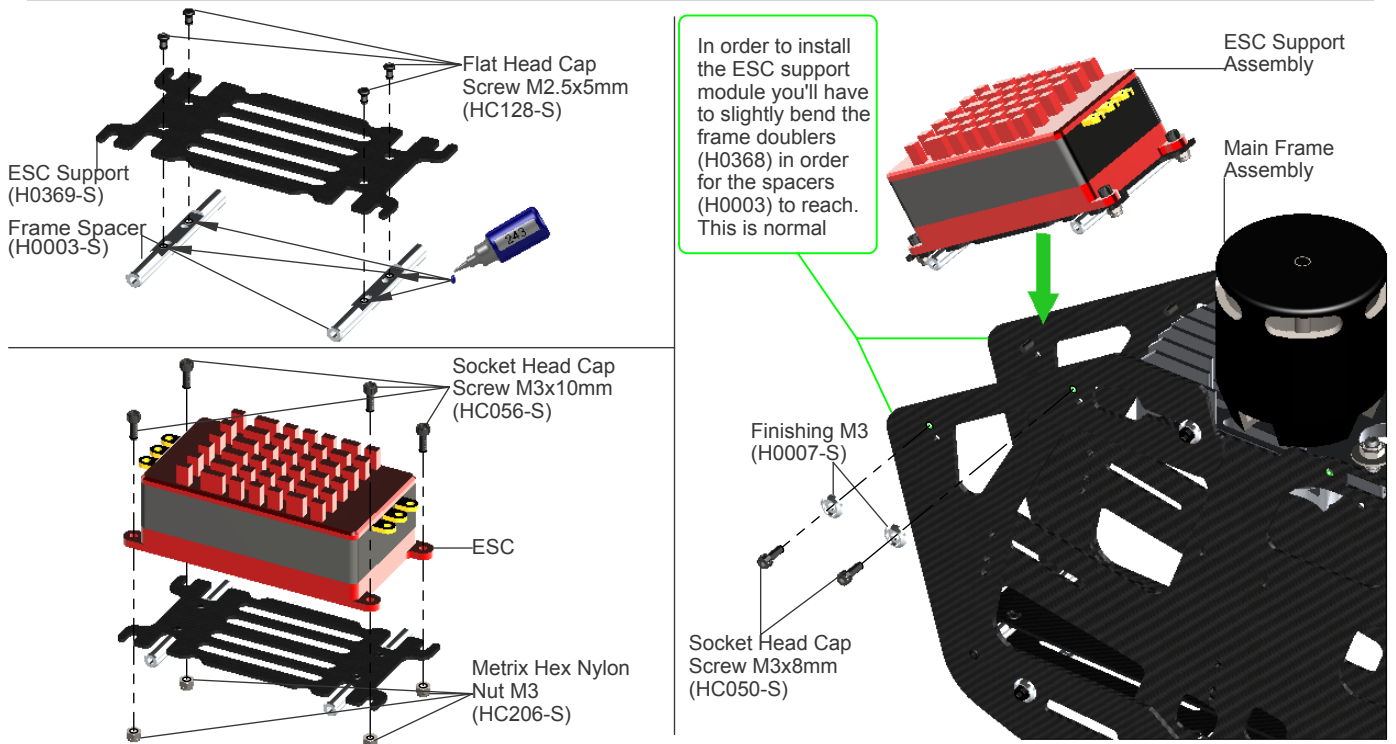


Figure 1: Shows the installation of the Kosmik ESC from Kontronik.

Figure 2: Shows the motor correctly wired. This drawing shows the connection between the motor and ESC using very short cables.

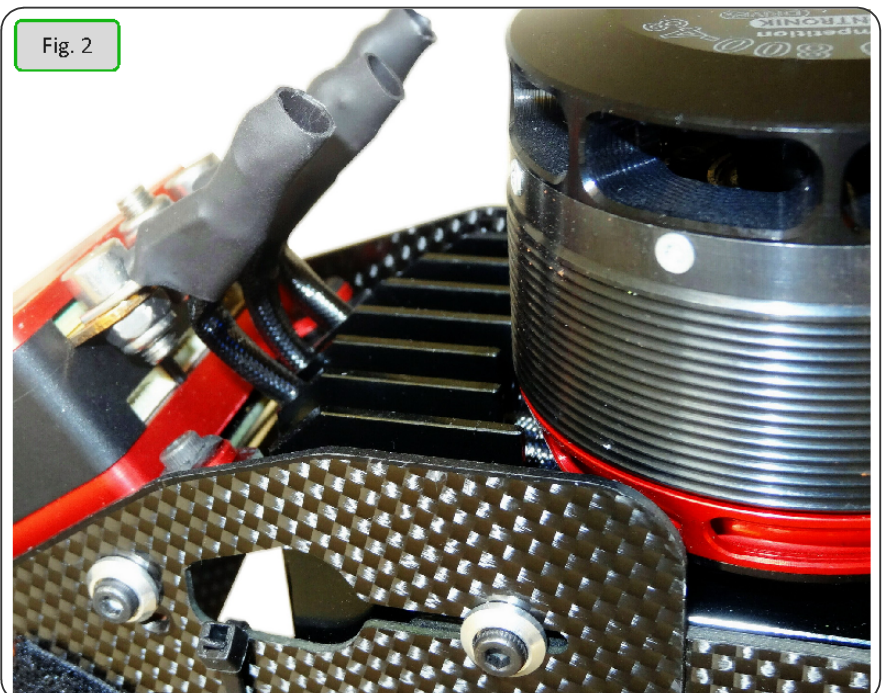




Figure 1: Shows the wiring which connects the receiver and ESC .
If the BEC used is combined with the ESC, it is recommended to use a dual wire connection.



Fig. 1

Figure 2-3: Shows the installation of a 2S battery for the flight control system.
Alternatively, a BEC could be placed in the same area.

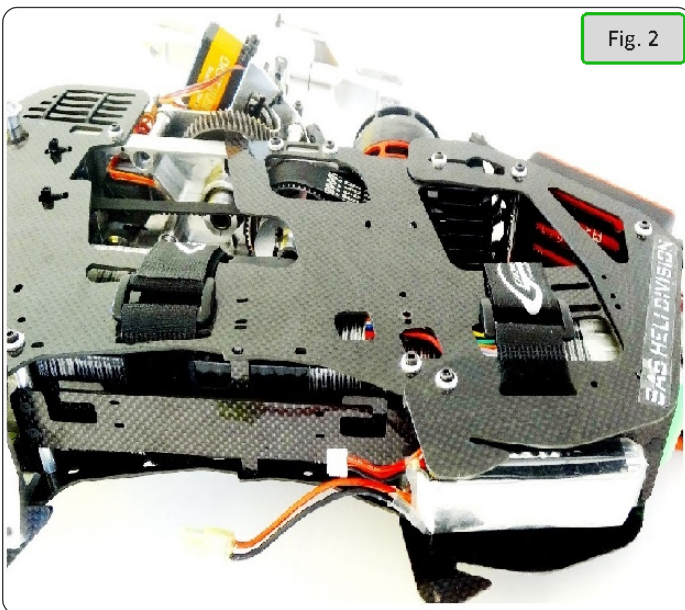


Fig. 2

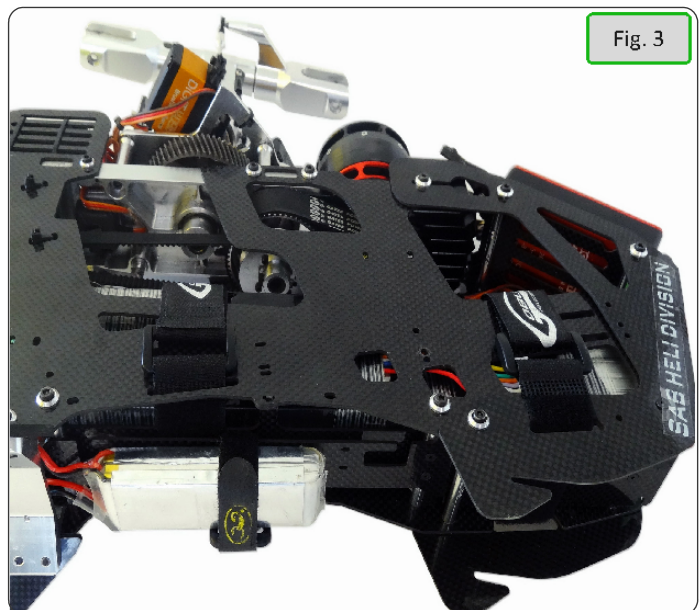


Fig. 3



FLYBARLESS CONTROL UNIT AND RX INSTALLATION

It is possible to install any commercially available Flybarless control unit in the goblin.

For Flybarless systems with a separate sensor, the sensor must be installed under the plate (Figure 1).

Figure 2 shows an example of installation of the receiver and flybarless control unit.

In Figure 3 you can see the extension lead for the tail servo. It is very important to include a connector for fast disassembly of the boom module. The connector will prevent servo damage in case of boom separation during a crash.

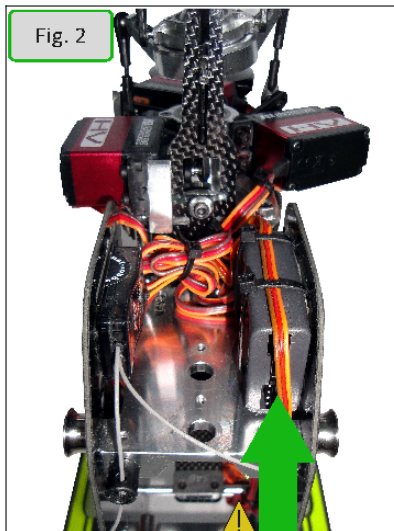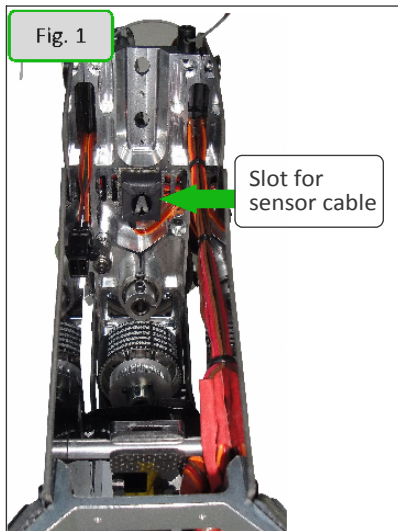

It is important to lock the plugs of the flybarless unit with an adhesive - for example hot glue.






Tail servo extension cable

To install a one piece Flybarless system it is necessary to add the support shown in these figures.

Figure 4 shows the installed support. Figure 5 shows the control unit and the receiver installed on the support.

Bag 18

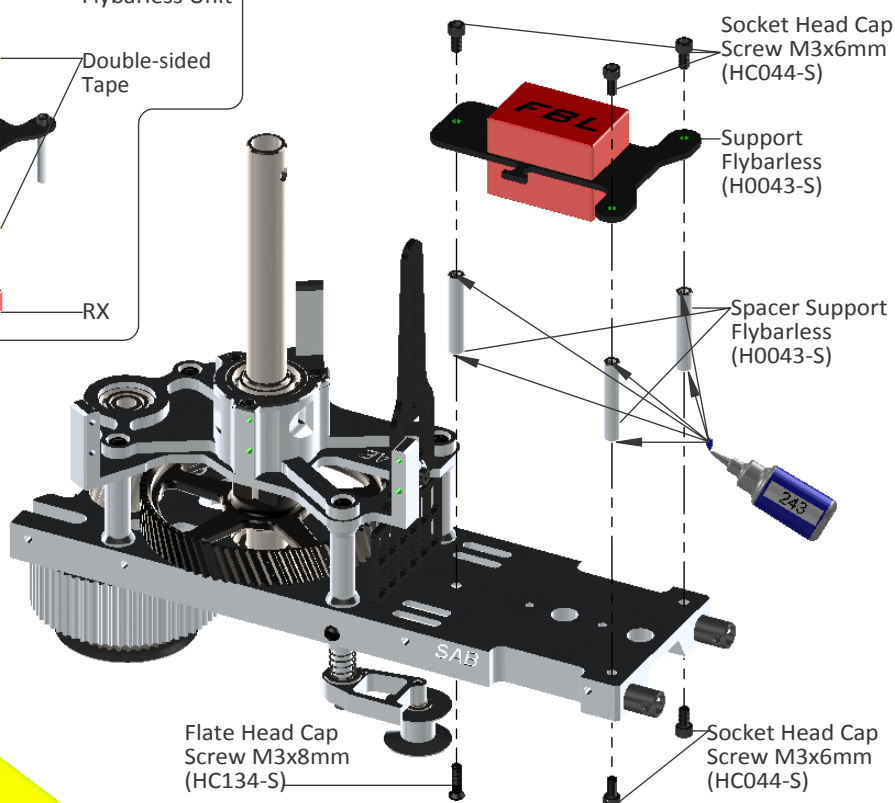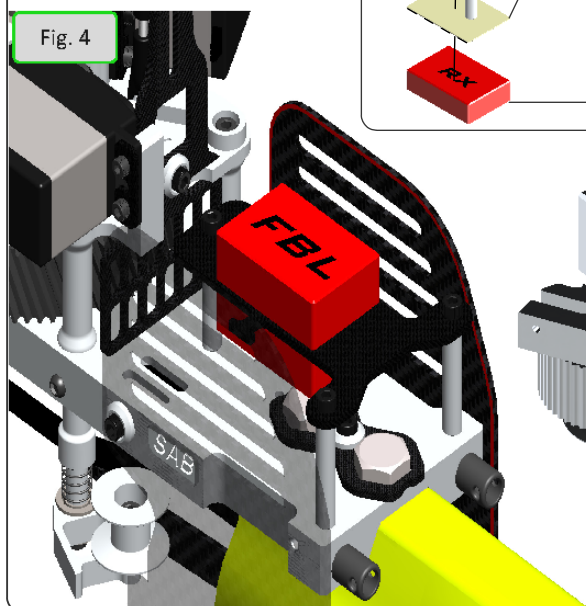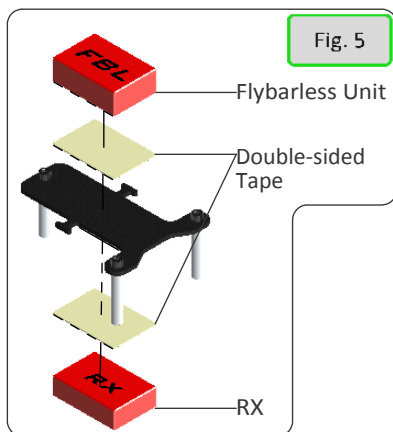



7-Boom and Tail






Bag 10, Tray 2


Tail Rotor Hub Assembly

Already Assembled

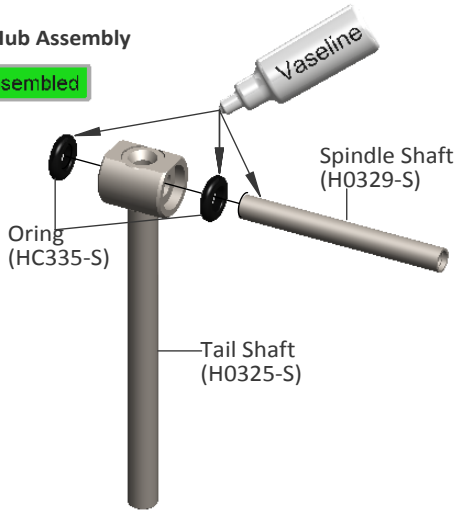

Tail Pitch Slider Assembly

Already Assembled

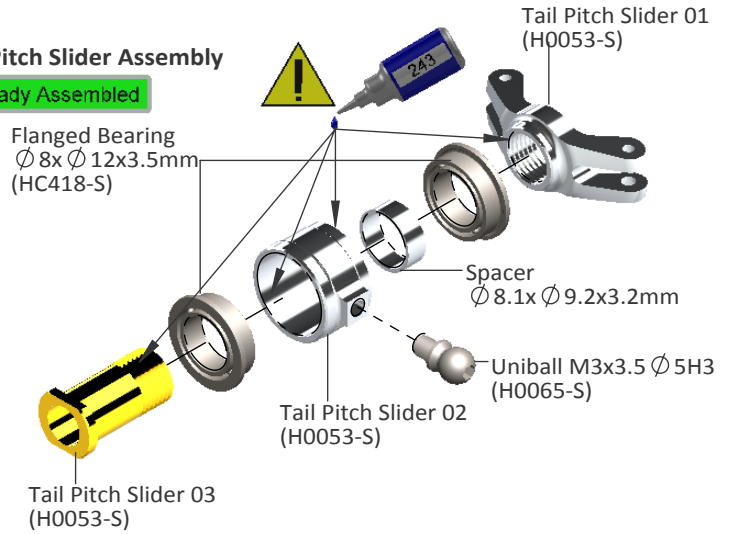


Bottom Head Cap Screw M4x6mm (HC096-S)

Thrust Bearing $\varnothing 5 \times \varnothing 10 \times 4 \text{mm}$ (HC435-S)


Note:

It is a normal for the tail to feel a bit tight after initial assembly as the tail spindle preload is usually high when the helicopter is brand new. The preload will loosen up after 2-5 flights allowing the system to become smooth.

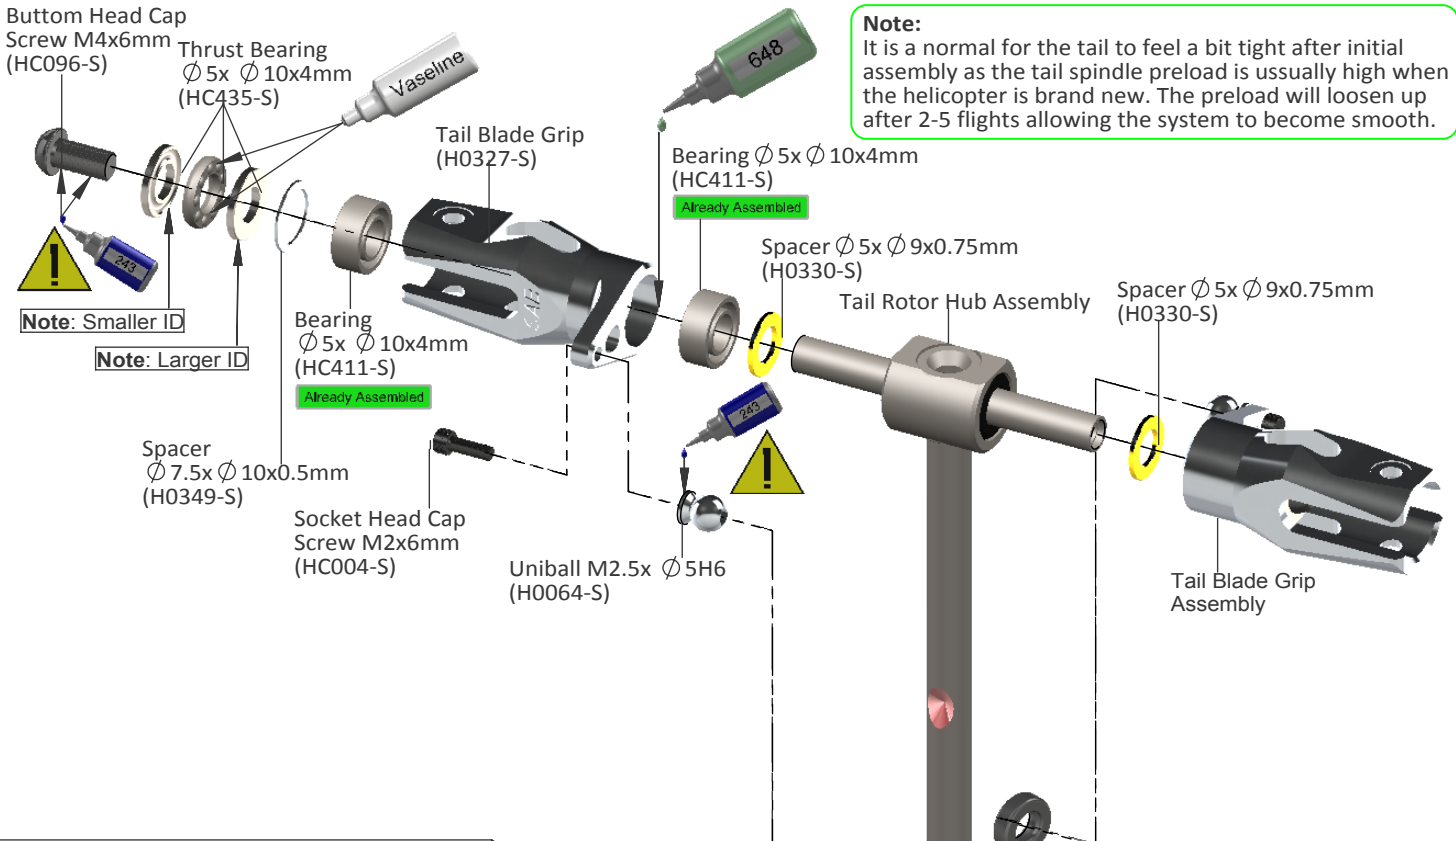


Tail Pitch Slider Link Assembly

Already Assembled

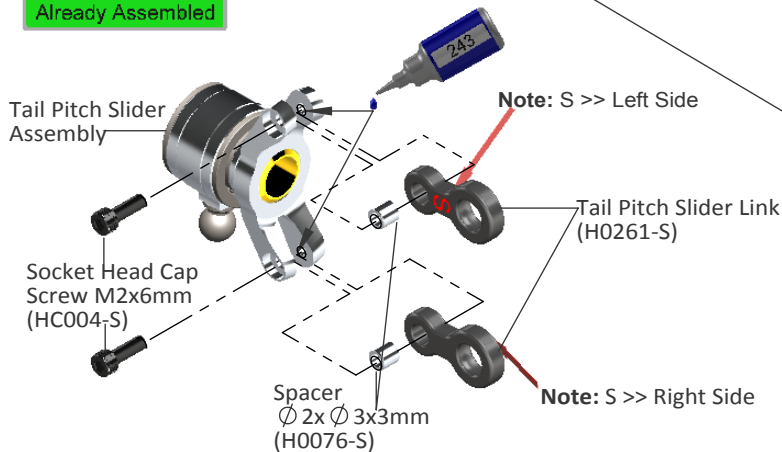

Bottom Head Cap Screw M4x6mm




Socket Head Cap Screw M2x6mm






Bell Crank Lever Assembly

Bag 11, Tray 2

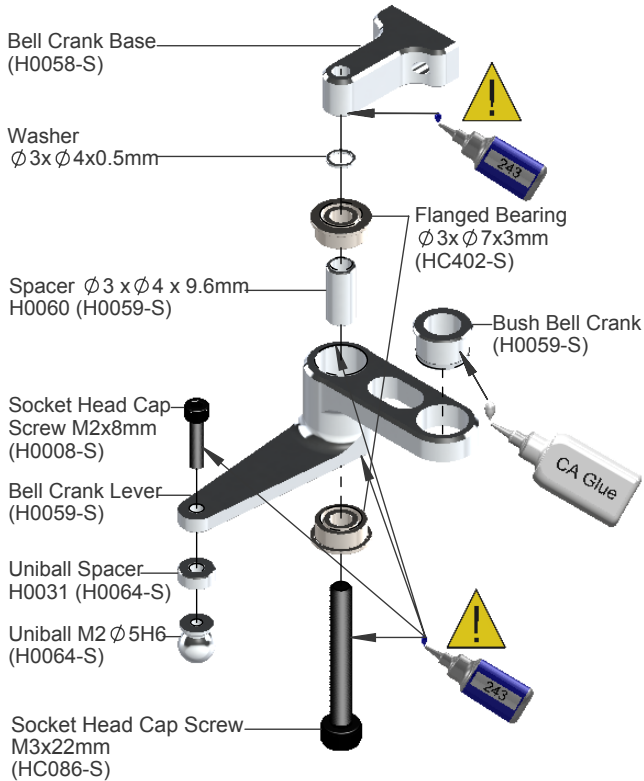


Tail Side Plate Assembly

Box 7, Bag 12, Tray 2

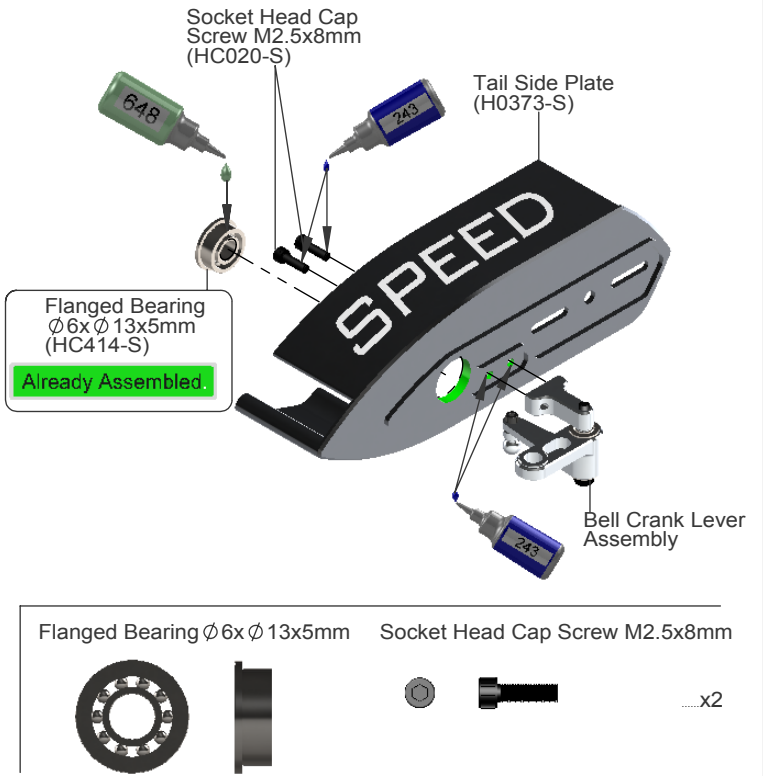


Tail System Assembly

Box 6, Bag 12, Tray 3

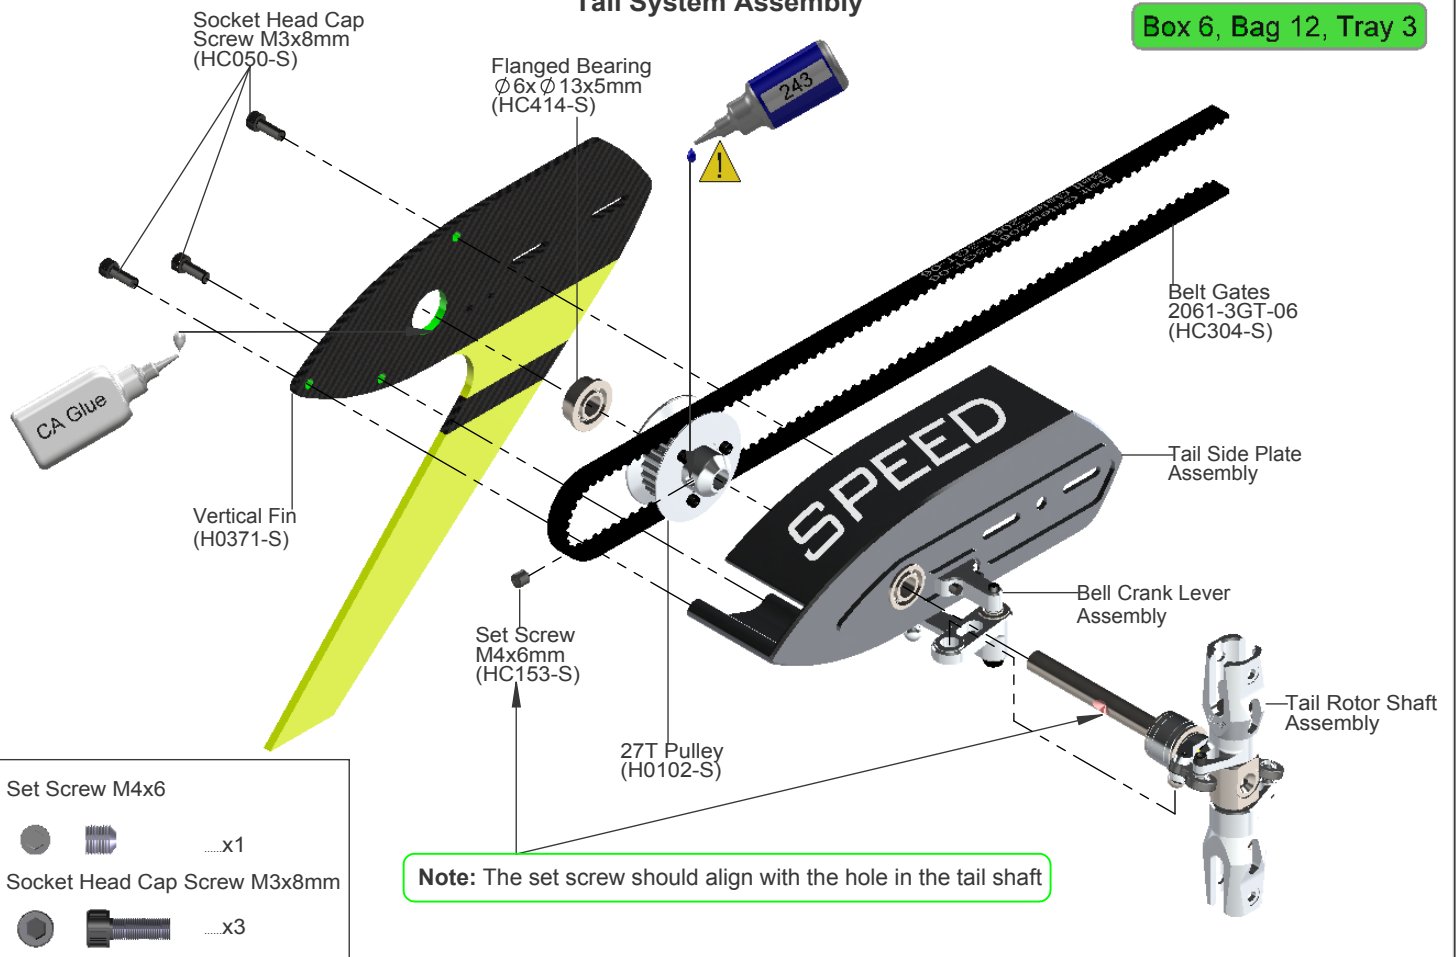



Tail Boom Assembly

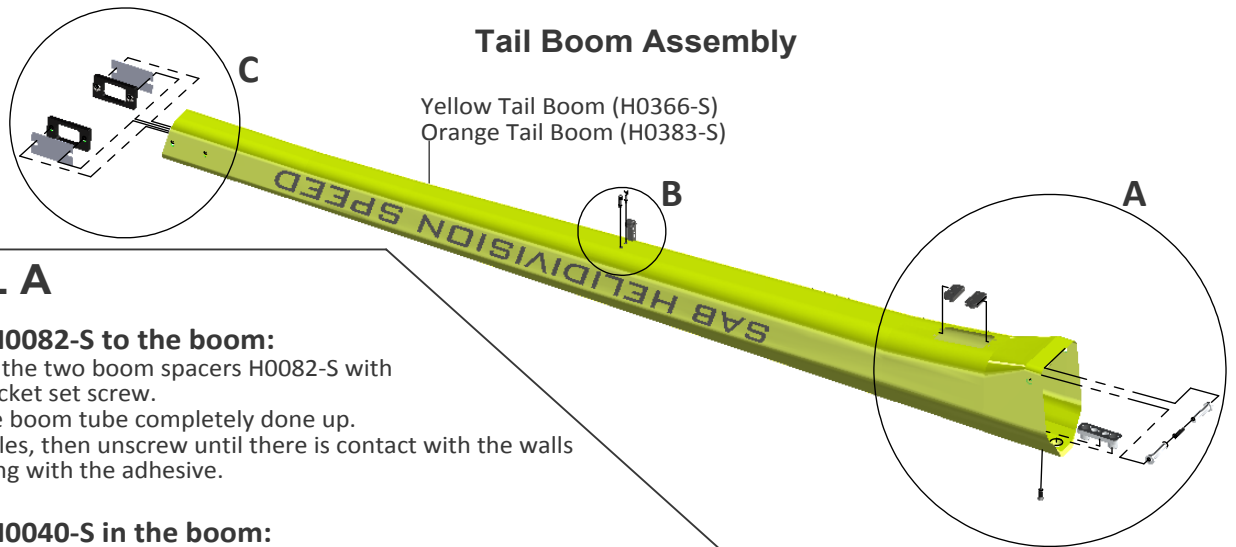


DETAIL A

Attaching H0082-S to the boom:

Pre-assemble the two boom spacers H0082-S with the M3x20 socket set screw. Insert into the boom tube completely done up. Center the holes, then unscrew until there is contact with the walls. Lock everything with the adhesive.

Assemble H0040-S in the boom:


Before assembling the two parts in the boom we suggest tightening the M2.5 screws into the two plastic parts to pre-thread them. In this way when you will assemble the tail servo it will be easier to tighten the screws into the plastic parts. Check the tail servo can fit, if necessary carefully sand the hole.

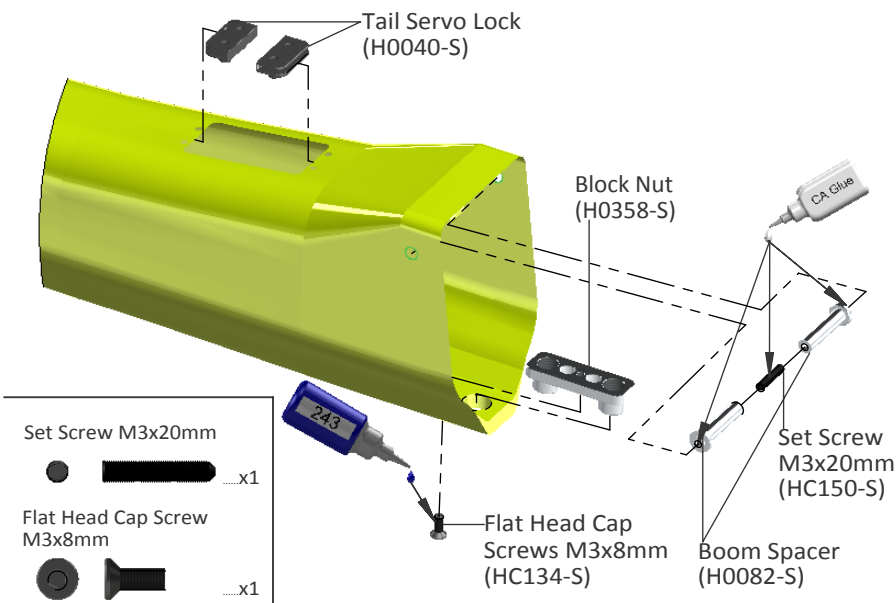


DETAIL B

Assemble H0045-S in the boom:

Before mounting H0045 on the boom we suggest to first tighten the M2.5 screws into the holes to thread them. In this way when you assemble the part it will be easier to tighten the screws.

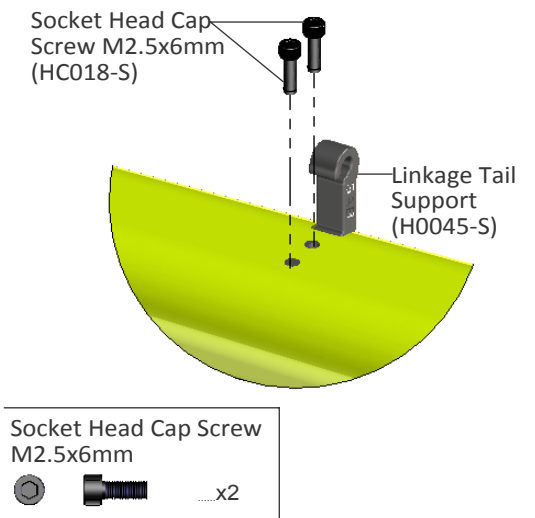



DETAIL C

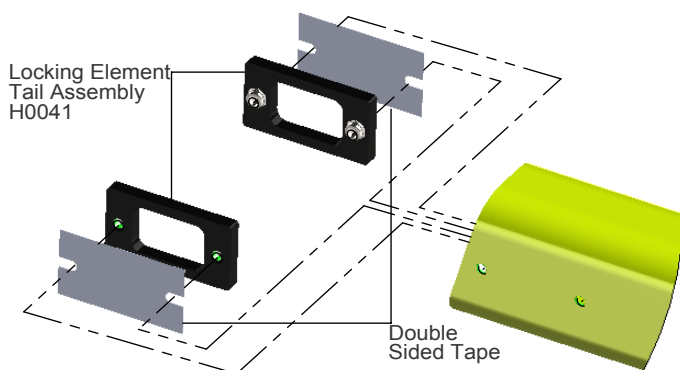


Locking Element Tail Assembly X 2

Already Assembled

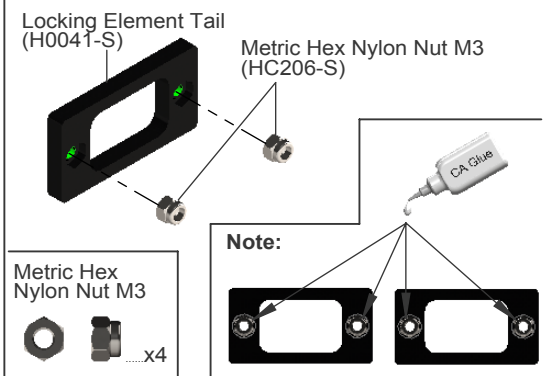




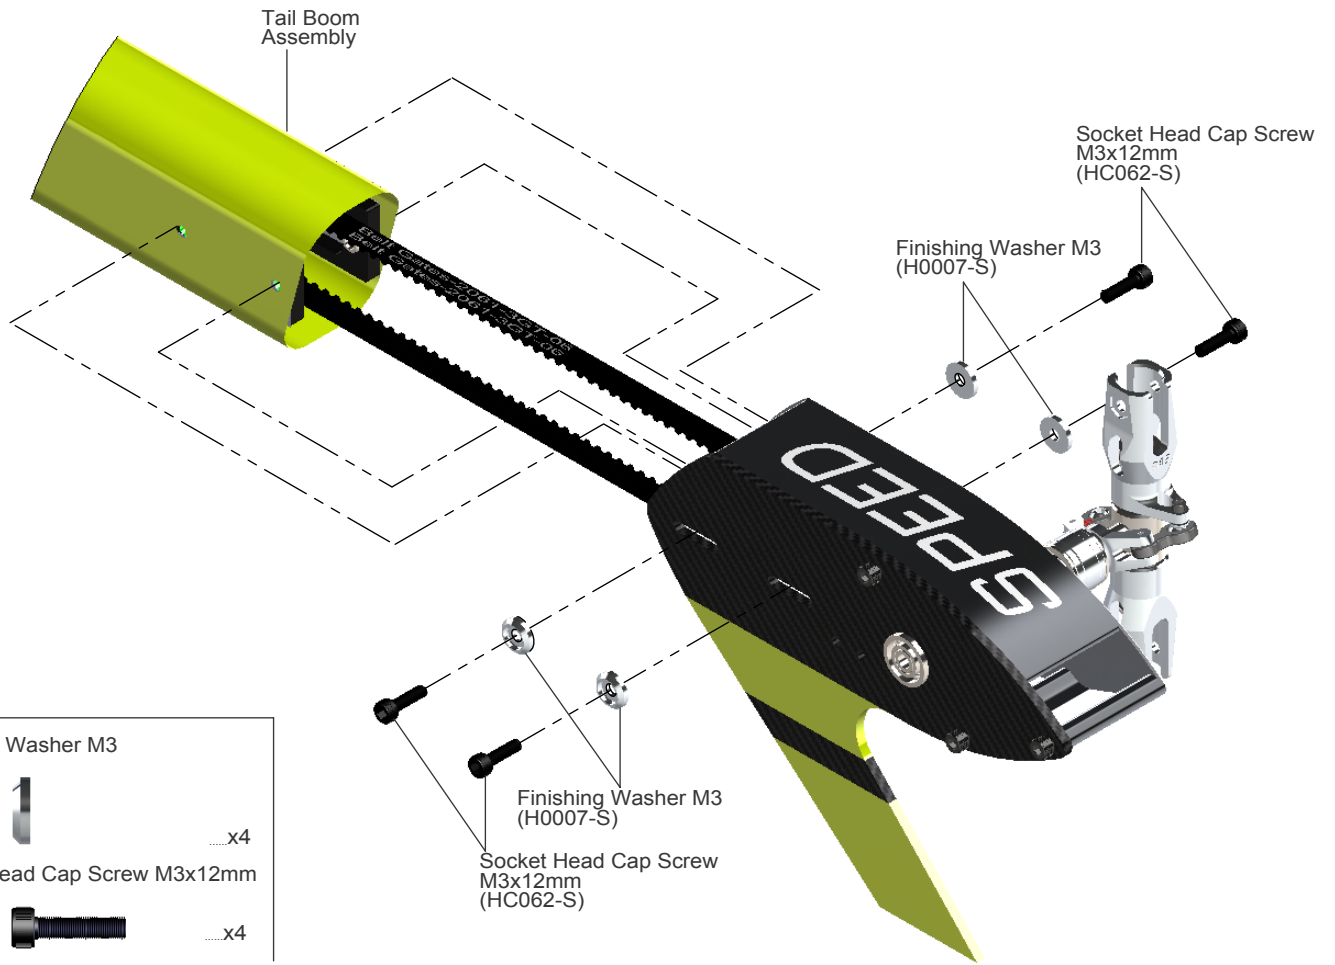


- Finishing Washer M3
-x4
- Socket Head Cap Screw M3x12mm
-x4

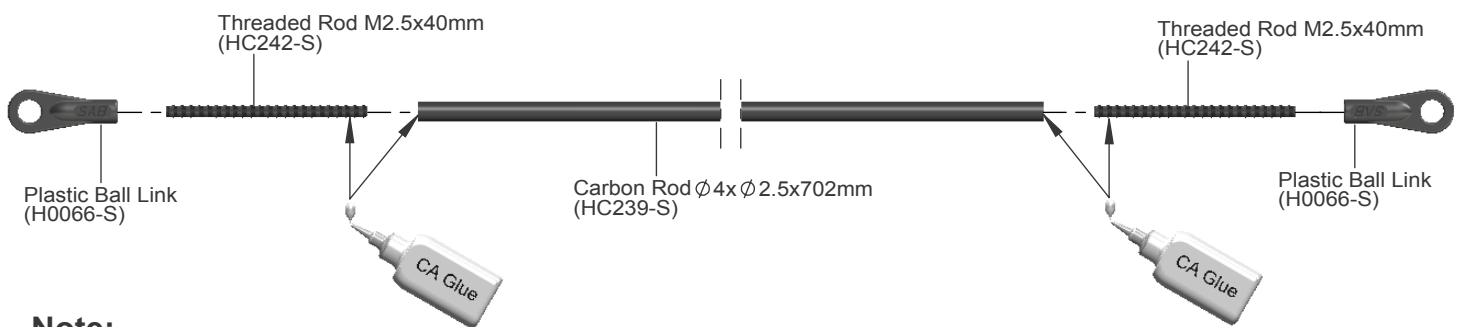



Note:

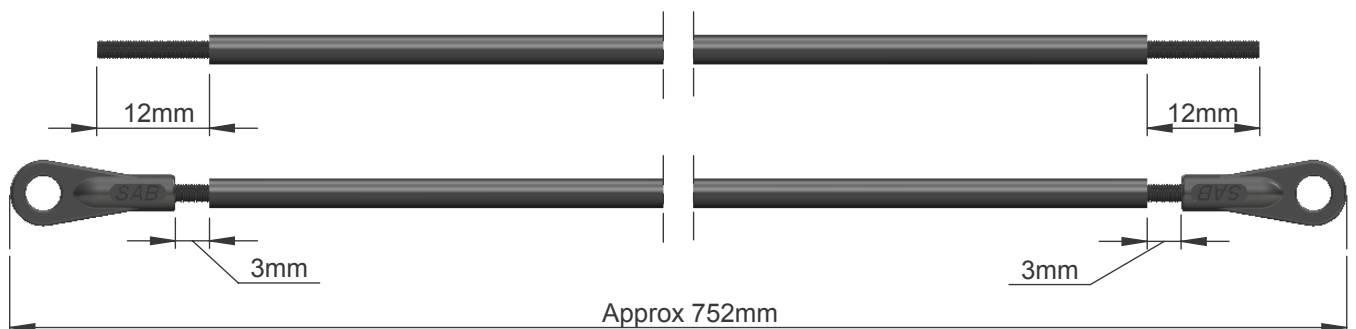

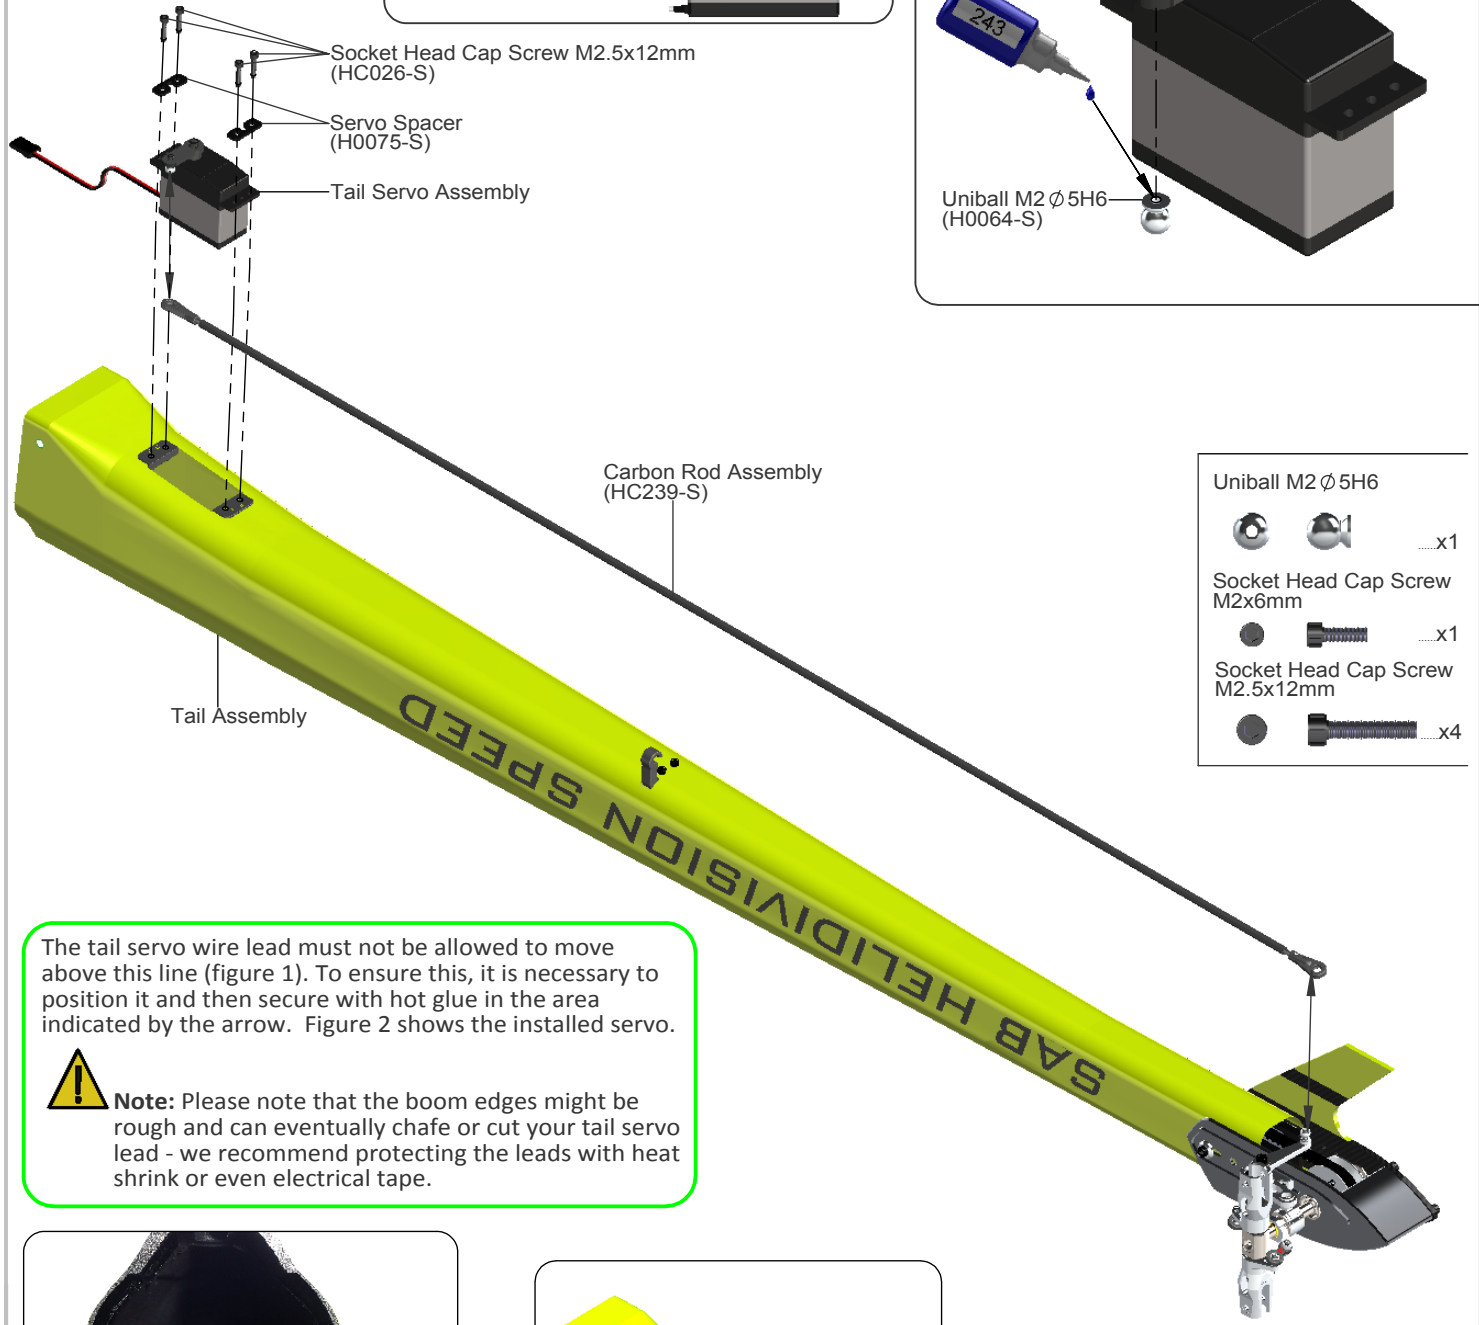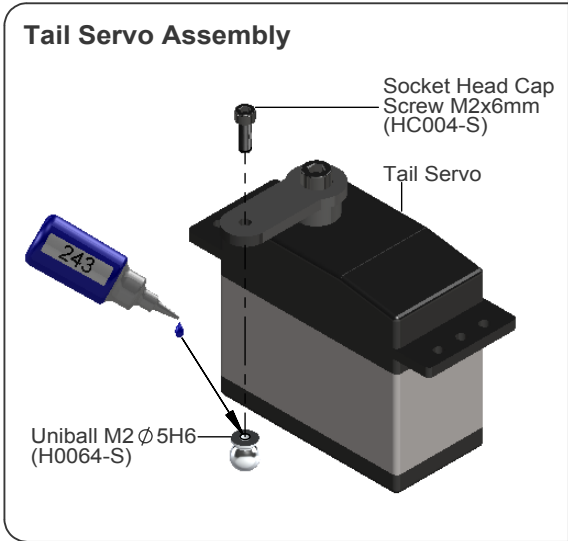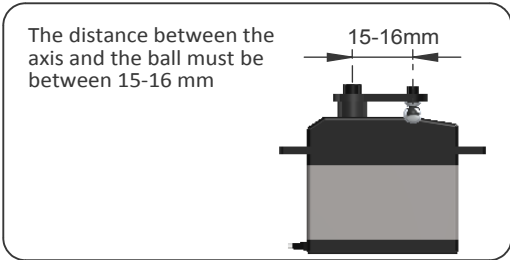

The tail servo wire lead must not be allowed to move above this line (figure 1). To ensure this, it is necessary to position it and then secure with hot glue in the area indicated by the arrow. Figure 2 shows the installed servo.

! **Note:** Please note that the boom edges might be rough and can eventually chafe or cut your tail servo lead - we recommend protecting the leads with heat shrink or even electrical tape.

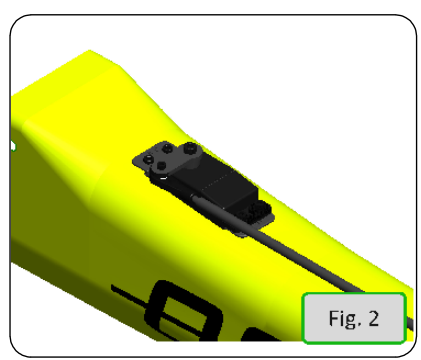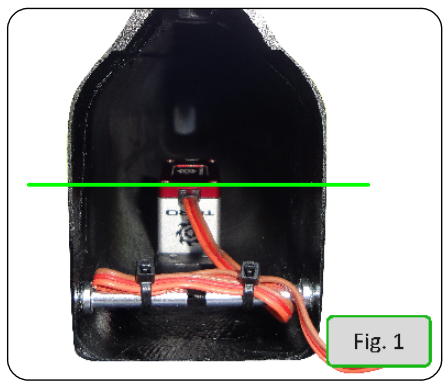



BOOM ASSEMBLY

- *Insert the tail boom assembly .
- *Lock the M8 nuts with the HA016 special tool supplied (Tray 2).
- *Firmly lock the lateral screws M3x12. Use Loctile for this screw and make sure you remain tight.
- *Assemble the H0038 carbon security plate .
- *Connect the tail servo wire to the previously fitted extension lead.

- Socket Head Cap Screw M3x6mmx1
- Finishing Washer M3x1
- Socket Head Cap Screw M3x12mmx2
- Nylon Screws M8x20mmx2






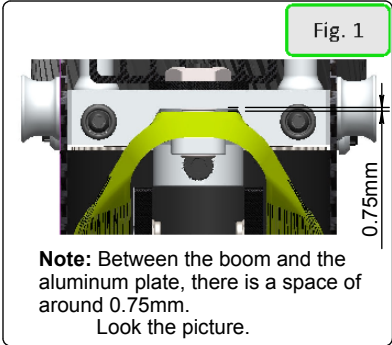


Fig. 2


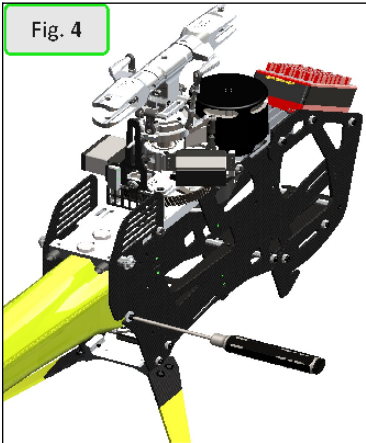
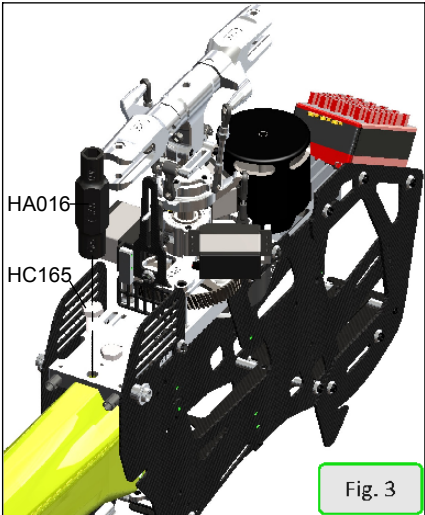
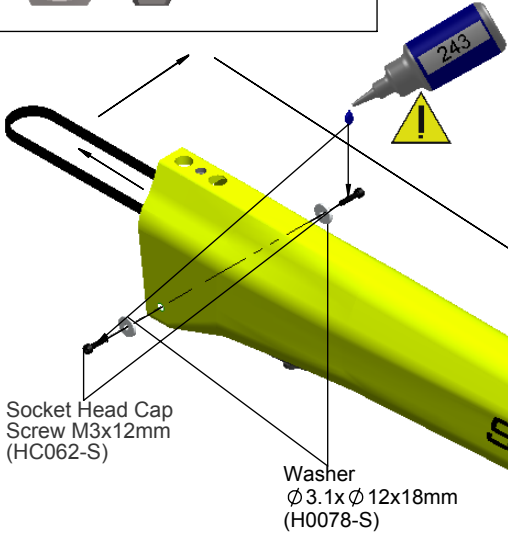


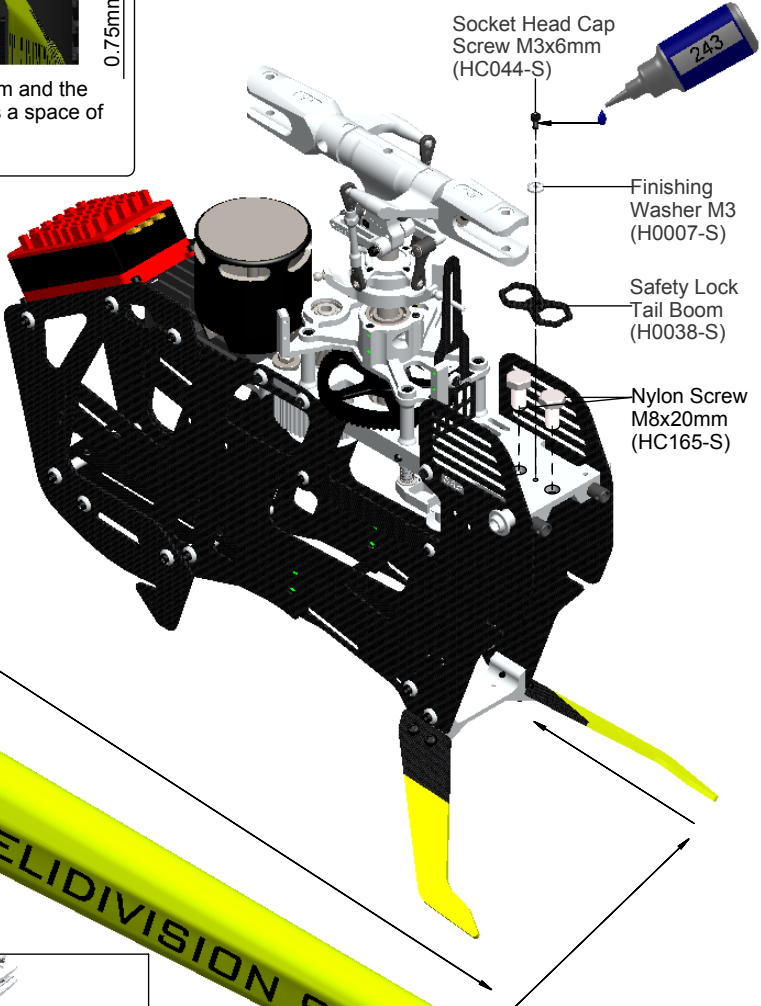

TAIL BELT TENSION

- *Check the proper assembly of the tail boom.
- *Check that the aluminum part of the tube is against the M3 stop screw.
- *Loosen the tail group by loosening the 4 M3 screws.
- *Install the belt onto the pulley, taking care to respect the direction of rotation (figure 1).
- *Rotate the tail drive several times by hand.
- *Load the spring by a rotation of 270° the tensioning arm (clockwise)
- *Tension the boom until the tensioning arm is aligned with the frame.
- *Tighten the 4 screws.
- *Check that the tail output shaft is perpendicular to the tube. (figure 2)
- *In figure 3,4,5 you can see the three conditions, ok, too loose and too tight.

NOTE. To disassemble the tail boom it is possible to remove the pulley H0101-S without loosening the tail unit. Remove the locking screw and pull down.

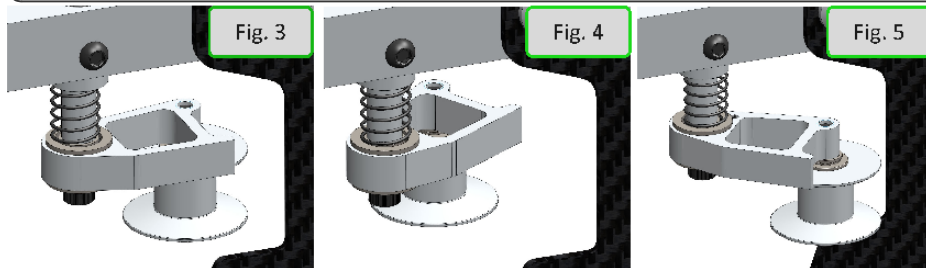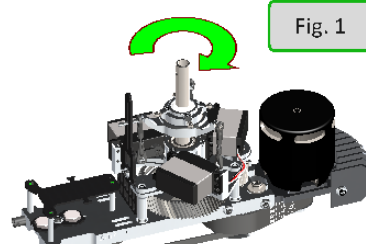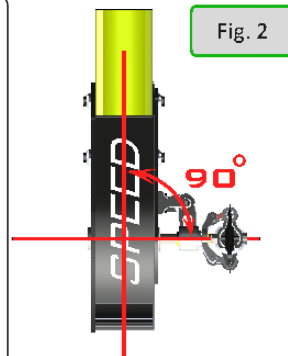

CANOPY

The Goblin Speed canopy has a very effective locking system in order to eliminate vibrations and optimize aerodynamics.

You must install the following to complete the canopy assembly:
Adhesive foam tape (Fig 6), Canopy edge protection (Fig 8), and Canopy grommets (Fig 6)

To install the canopy:

- Insert the canopy from the front up to the area of the block shown in Fig. 7
- Join the edges and tighten the M3 bolts(Fig.8)
- Insert the H0378 knobs (Fig.9)

The canopy hole must be 12 to 12.5 mm in diameter. Initially is 9 mm. You can enlarge the hole slightly to optimize the vertical position of the canopy itself.

Tray 2




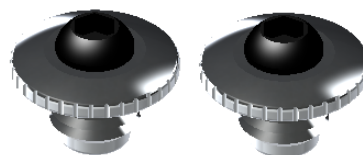


Fig. 9

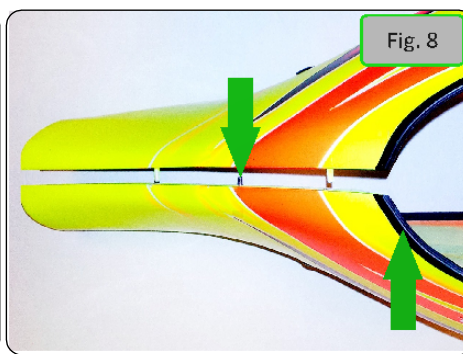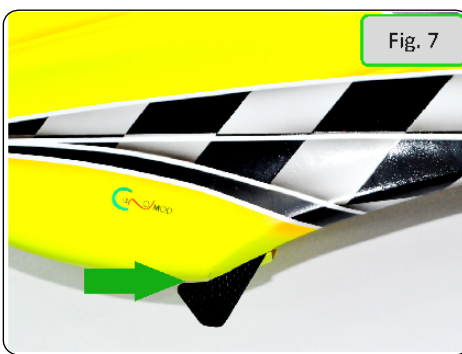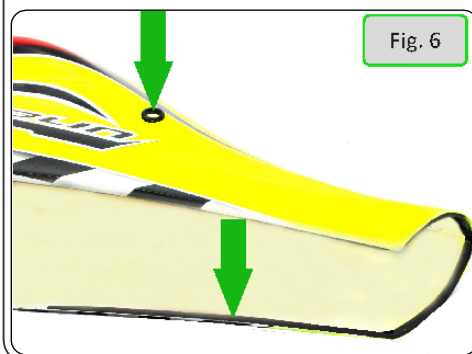

BATTERIES

The battery tray system in the Goblin 700 is simple, but very effective.

The battery should be attached to the tray (Part **H0149**) with heat shrink, tape or velcro.








You can optionally use the battery protection tray (Part **H0151**) see **Fig. 1, 2**.

Before permanently mounting the batteries onto the battery tray, check the ideal position for the best center of gravity. Cut the heat shrink around the carbon fiber tray locking pins. **Fig. 3**.

Battery Pack:

Slide the tray until it locks into the CNC stopper. **Fig. 4, 5**.

Using the velcro straps, making sure that the two locking pins are stopped against the frame spacer (Part1#**H0003** and #**H0151**) **Fig.6, 7**.

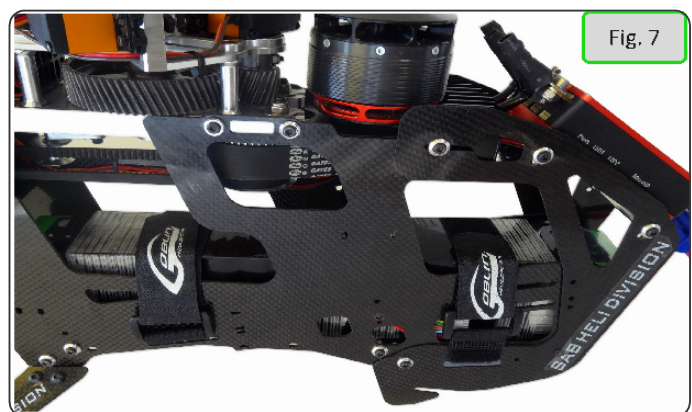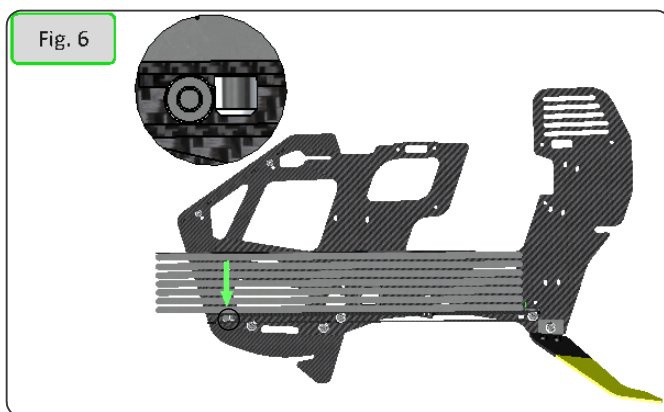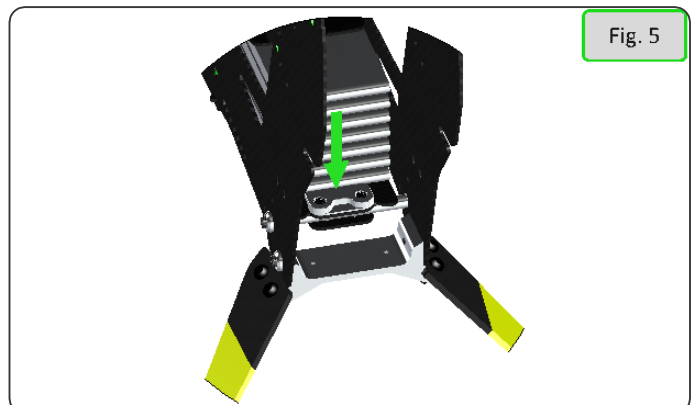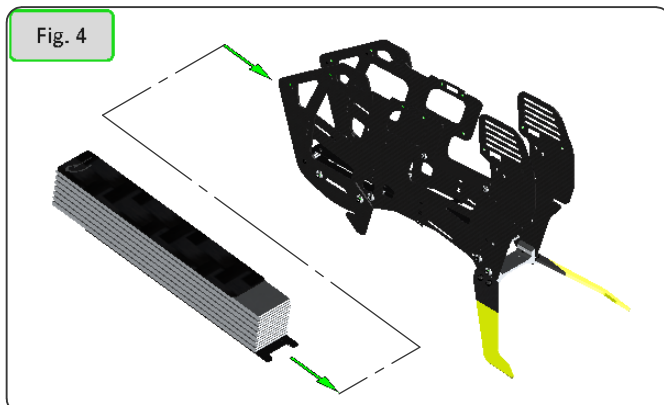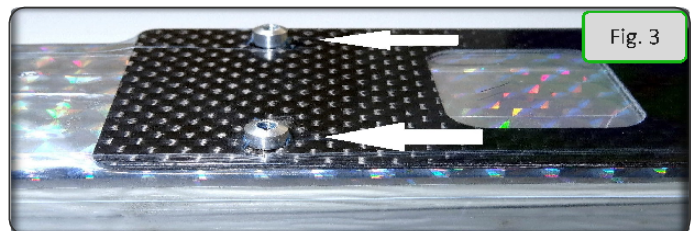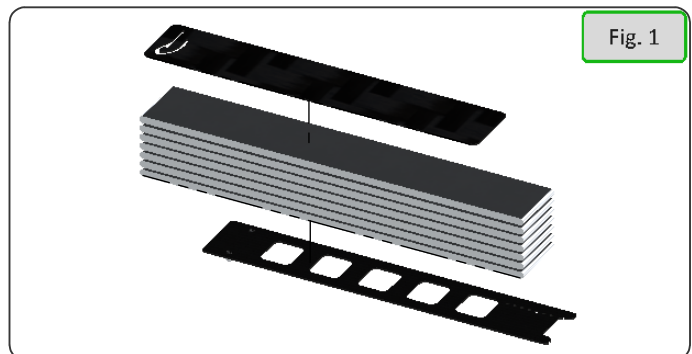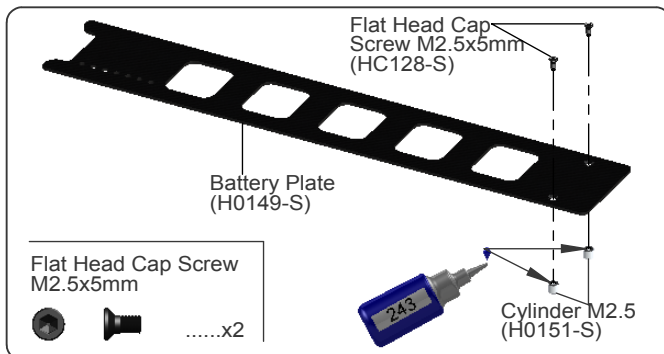



! SERIAL NUMBER

In Bag 21, i will find the serial number tag for your Helicopter

Sticking the tag as show. Please remember to register your product. (See page 1)






OPERATIONS BEFORE FLIGHT

- *Set up the remote control and the flybarless system with utmost care.
- *It is advisable to test the correct settings of the remote and flybarless system without main blades or tail blades fitted.
- *Check that all wiring is isolated from the carbon/aluminum parts. It is good practice to protect them at the points where they are at most risk.

! *Be sure of the gear ratio, verifying carefully the motor pulley in use. The forces acting on the mechanics increase enormously with increasing of rpm. Although the Goblin can fly at high rpm, for safety reasons we suggest to not exceed 2200 rpm. You can get 2600 rpm with the model at a safe distance (at least 30 meters from any people), .

- *Check the correct tension of the tail belt through the belt tensioner.
- *Fit the main blades and tail blades. (Fig.1 and Fig.2)
- *Please make sure the main blades are tight on the blade grips, you should be able to violently jerk the head in both directions and the blades should not fold. Failure to tighten the blades properly can result in a boom strike. To fold the blades for storage, it is advisable to loosen them.
- *Check the collective and cyclic pitch.
- *It is important to check the correct tracking of the main blades.
- *On the Goblin, in order to correct the tracking, adjust the main link rod as shown in figure 3. This is provided with a right/left thread system that allows continuous fine adjustments of the length of the control rod; for this adjustment it is not necessary to detach the ball link.

! *Perform the first flight at a low headspeed, 1700/1800 RPM.
After this first flight, do a general check of the helicopter. Verify that all screws are correctly tightened.

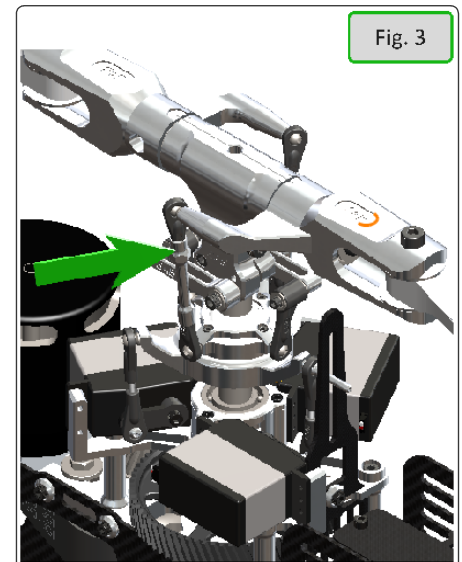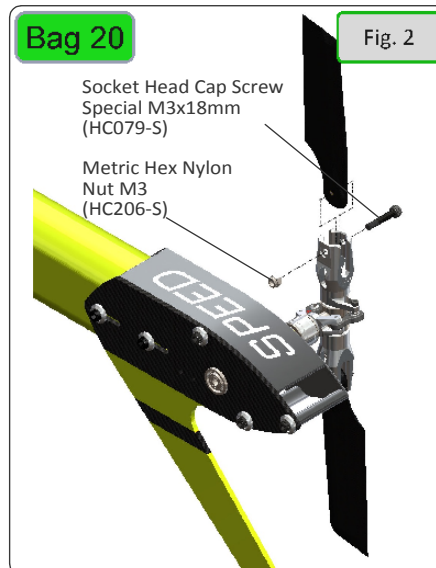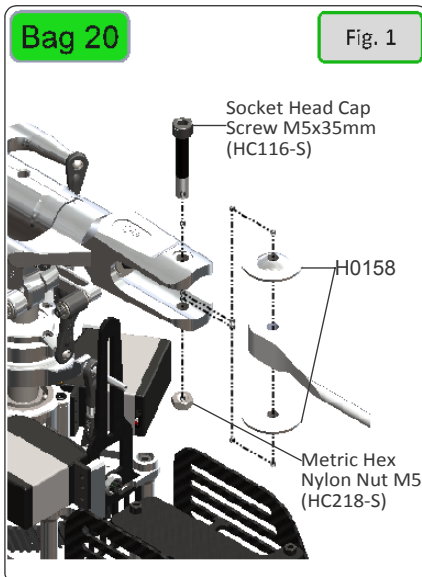

HPS HEAD

- The dampening system of this head allows for a wide range of head speeds to be used without sacrificing safety.
- The dampers are composed of an o-ring and a technopolymer damper that defines the maximum possible movement of the spindle.
- The model response with change based on the preload, less preload (less shims) will allow for a softer feel and lower head speed, a high preload is used for hard 3D flight.
- To increase the preload, you can add an additional 0.2mm shim on each side, to decrease the preload, you can remove a 0.2mm shim on each side. It is important that the blade grips do not have the axial play so you must always keep the 1mm shim on each side regardless. The initial setup of the kit is correct for Goblin Speed.



In Flight

During its first flights the Goblin has to be "run in".

The Damper, the main gear, the uniball and other parts must undergo some slight wear to operate smoothly. It is likely that during the very first flights the model may exhibit a swaying phenomena, particularly at low head speed. This phenomena disappears after a few flights.

General Information

A high-speed helicopter requires a good balance between power, aerodynamic efficiency, blade efficiency for speed and stabilization system (flybarless unit).

The stability of the helicopter at high speeds is usually dependent on the types of blades being used. The Goblin Speed blades are designed specifically for this purpose, they combine ease of flight while maintaining stability at high speeds.

"SPEED" Flying

It is recommended to have at least 2 flight conditions (idle up modes), one for take off and landing and another flight condition at much higher RPM for speed flight.

⚠ The high RPM flight condition should only be used while away from the pilot (at least 30 meters). Speed passes should always be made longitudinally to the pilot and spectators (left to right or right to left) and always at a safe distance.

⚠ The main and tail blades included with the Goblin Speed are not suitable for 3D flight, they're optimized for sport and speed flying ONLY.

If you would like to perform 3D maneuvers with your Goblin Speed, we recommend using standard 3D blades. SAB Part # BW4690 and BW5115.

General Setup Tips:


- We recommend 15° of collective pitch for speed flying. Exceeding 15°-16° will simply cause loss of efficiency, which will in turn "rob" power without increasing forward speed.
- We recommend a rotor speed of approximately 2400 to 2600 RPM max. The same applies for rotor speed, using higher rotor speeds can potentially exceed 0.7 to 0.8 match speed for the blade tips, which will decrease efficiency.
- We recommend cyclic servos with at least 20 kg of torque.
- ESC Tested: Kosmik 160-200 and YGE 160-320
- Motors Tested: Pyro 750-800-850 Competition, Scorpion HK 4535 / 4540

Battery	Motor	Pinion	RPM	Pitch
12S - 5000 mAh	Kontronik Pyro 750 -56	22T	2400	+15°
	Scorpion HK 4530 -540	23T	2400	+15°
14S 4000-5000 mAh	Kontronik Pyro 800 -48 Co	23T	2500	+16°
	Kontronik Pyro 850 -50 Co	22T	2500	+16°
	Scorpion HK 45XX -550	20T	2500	+16°

Tips

There are a few extra parts in the kit:

- H0372: Speed tail fin, this fin minimizes the drag induced by the standard tail fin
- H0379: Safety landing gear, increases safety during take offs and landings. The correct angle connection reduce the drag
- H0377: This allows you to lock the batteries. Please use under the front strap.


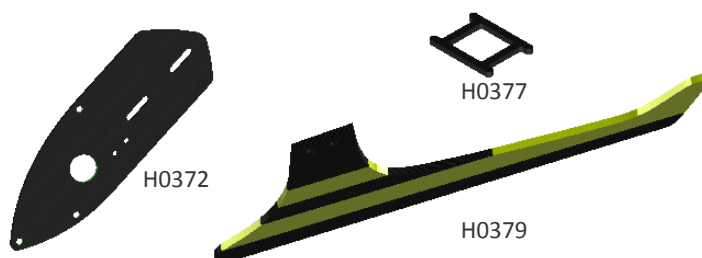


To Improve cooling, it is possible to cut a small opening in the position shown in Figure.





TIPS: We recommend using something to prevent damage to the canopy due to vibration. In the picture, we used a piece of self adhesive velcro on one side (**Fig. 1**) and a piece of foam (from a blade holder) on the other side. (**Fig.2**)

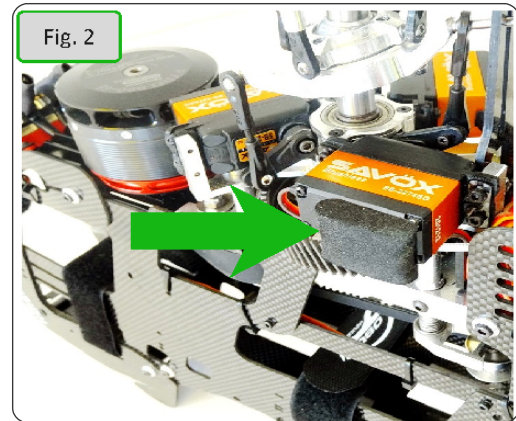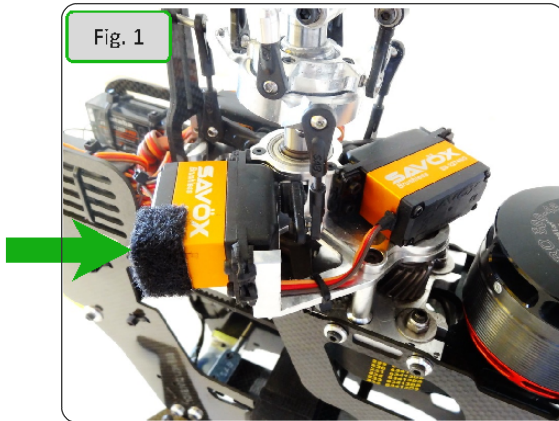

MAINTENANCE

*On the Goblin, areas to look for wear include:

- * Motor belt
- * Tail belt
- * Damper
- * Main gear and pinion

The lifespan of these components varies according to the type of flying. On average it is recommended to replace these special parts every **100** flights.

*The head tends to lose rigidity after a while. Check this condition every **20** flights. Preloading with precision shim washers, it is possible to vary the rigidity of the head.

*Check all uniballs often.

*The most stressed bearings are definitely those of the tail shaft. Check them frequently. All other parts are not particularly subject to wear.



*Periodically lubricate the tail slide movement and its linkages as well as the swashplate movement and its linkages.


*Lubricate the main gear with Tri-Flow Synthetic grease, every **20** flights.

*Check the screws that are highlighted in the following images frequently, make sure you remain tight (**fig.3** and **fig.4**).

*To ensure safety you should do a general inspection of the helicopter after each flight. You should check:


- * The maintenance of proper belt tension.
- * The proper isolation of wires from the carbon and aluminum parts.
- * That all screws remain tight.

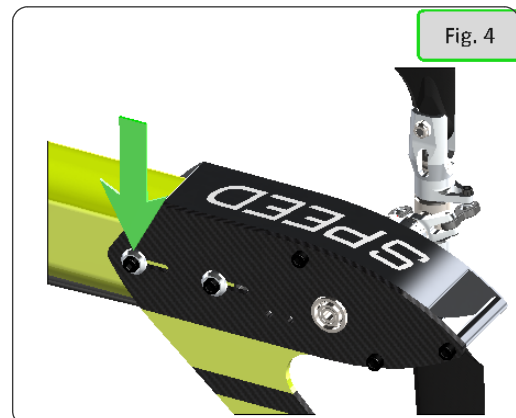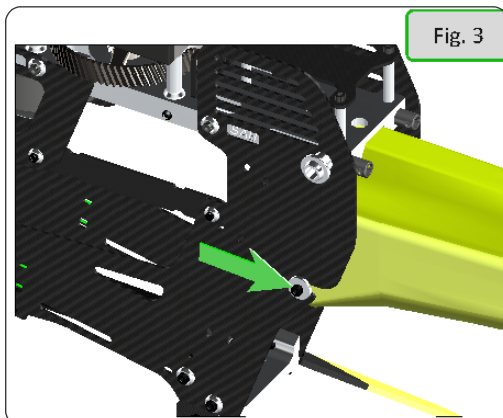

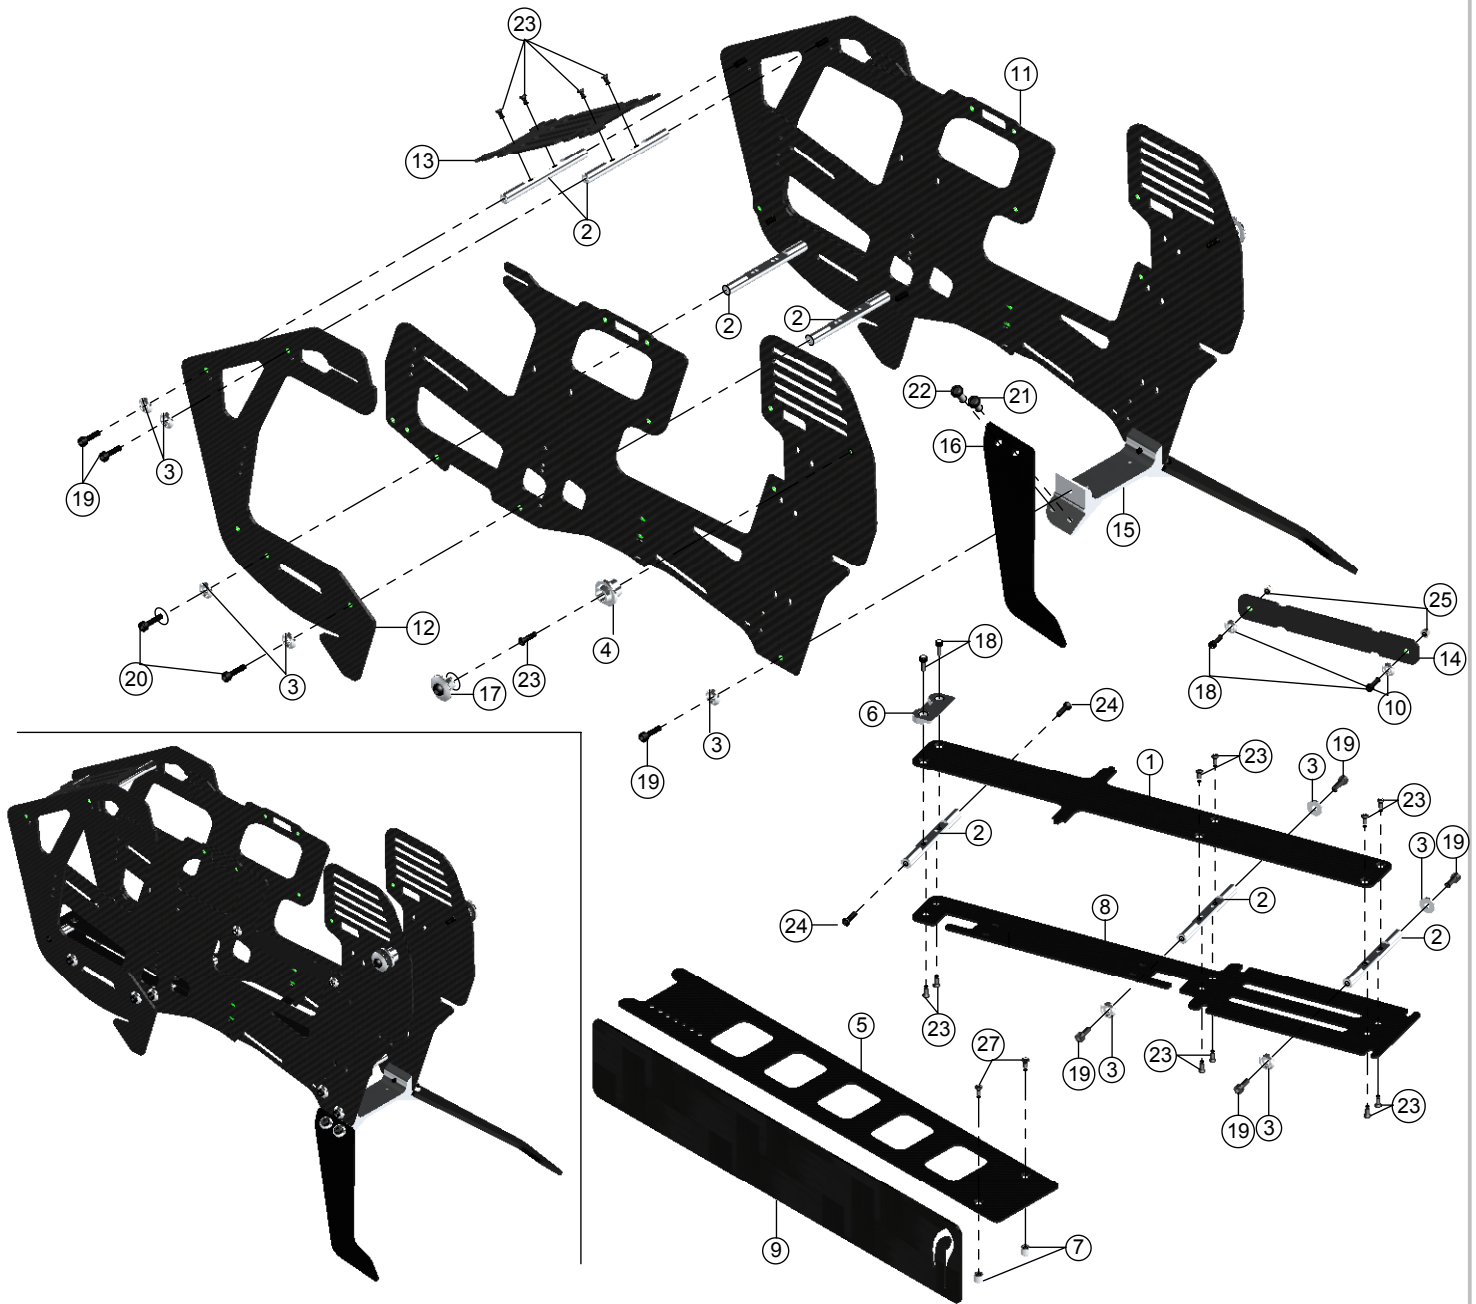


Main Frame				
POS	COD	Name	Specification	Quantity
1	H0002	Battery Tray	Carbon Fiber	1
2	H0003	Frame Spacers	Aluminum	7
3	H0007	Finishing Washers M3	Aluminum	16
4	H0008	Canopy Poitioner	Aluminum	2
5	H0149	Battery Plate	Carbon Fiber	1
6	H0150	Stop Battery Plate	Aluminum	1
7	H0151	Cylinder M2.5	Aluminum	2
8	H0153	Battery Support	Carbon Fiber	1
9	H0155	Battery Protection	Carbon Fiber	1
10	H0255	Finishing Washers M2.5	Aluminum	2
11	H0354	Main Frames	Carbon Fiber	2
12	H0368	Vertical ESC Support	Carbon Fiber	2

Main Frame				
POS	COD	Name	Specification	Quantity
13	H0369	ESC Support	Carbon Fiber	1
14	H0370	Wires Support	Carbon Fiber	1
15	H0374	Landing Gear Mount Speed	Aluminum	2
16	H0375	Landing Gear	Carbon Fiber	2
17	H0378	Canopy Locking	Aluminum	2
18	HC020	Socket Head Cap Screws	M2.5 x 8mm	2
19	HC056	Socket Head Cap Screws	M3 x 10mm	10
20	HC062	Socket Head Cap Screws	M3 x 12mm	4
21	HC098	Button Head Cap Screws	M4 x 8mm	4
22	HC100	Button Head Cap Screws	M4 x 10mm	2
23	HC128	Flat Head Cap Screws	M2.5 x 5mm	16
24	HC134	Flat Head Cap Screws	M3x8mm	4
25	HC200	Metrix Hex Nylon Nut	M2.5mm	2

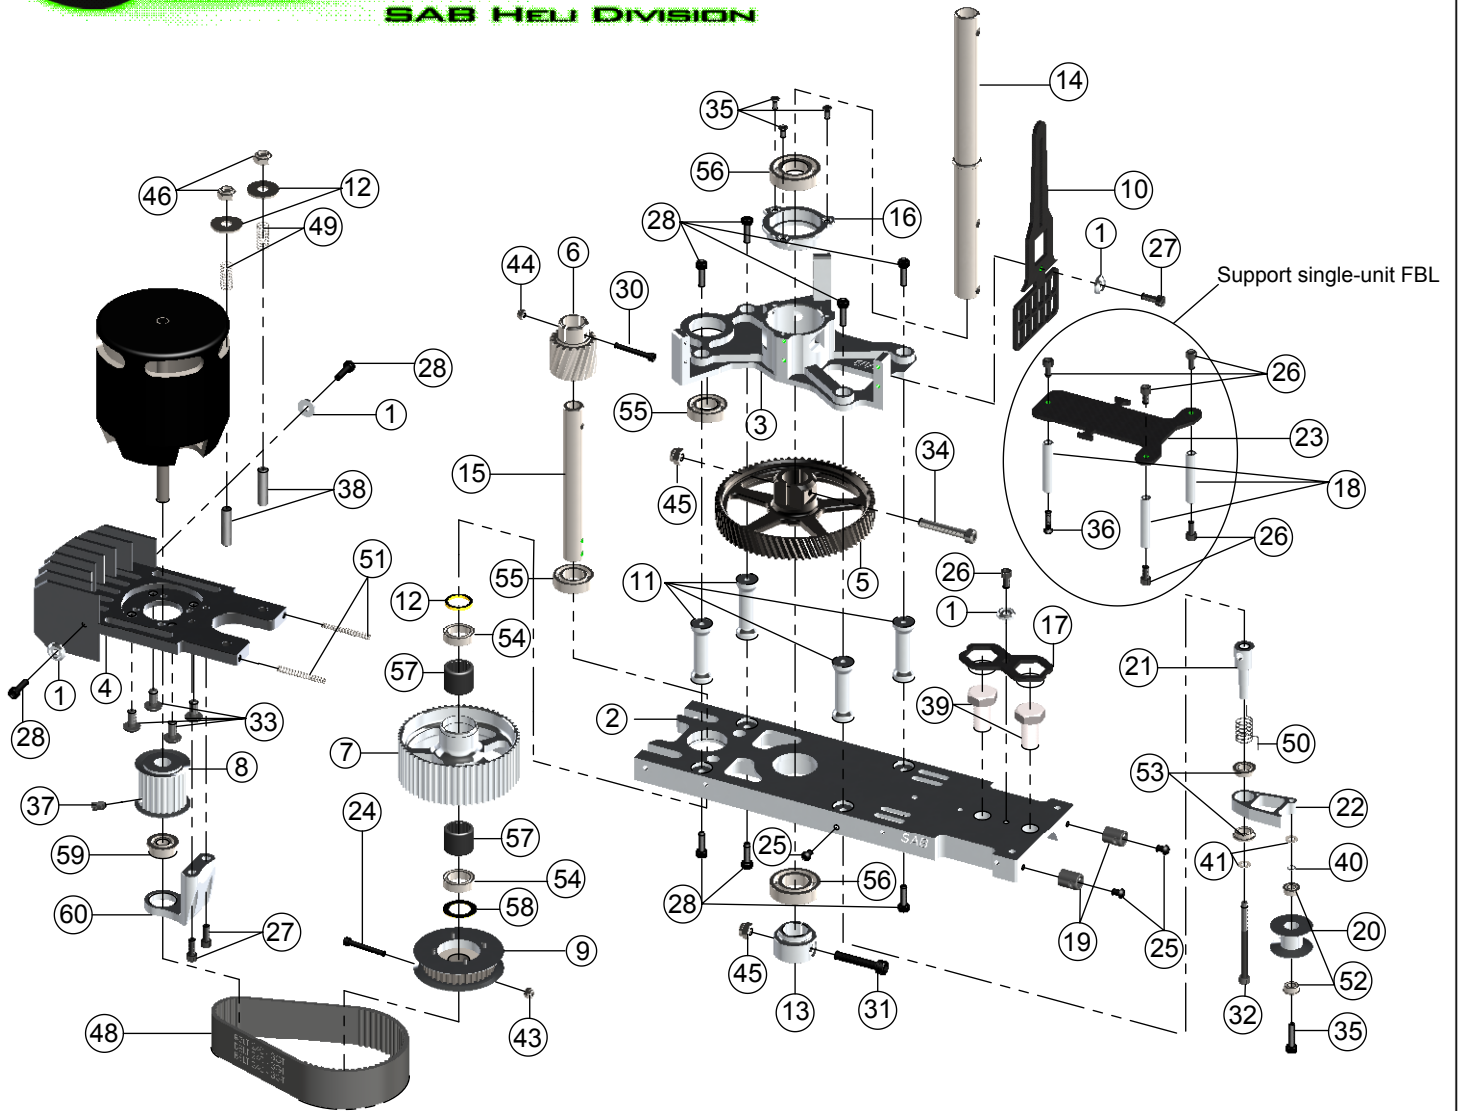


TRANSMISSION ASSEMBLY				
POS	COD	Name	Specification	Quantity
1	H0007	Finishing Washers M3	Aluminum	4
2	H0009	Main Structure	Aluminum	1
3	H0010	Servo Support	Aluminum	1
4	H0316	Motor Support	Aluminum	1
5	H0320	Main Gear	68T M1	1
6	H0361	Drive Pinion	19T M1	1
7	H0171	One Way Double Bearing	60T	1
8	H0175-22	Motor Pulley 20mm	22T	1
9	H0172	Front Tail Pulley Low	37T	1
10	H0017	Swash plate Anti-Rotation Guide	Carbon Fiber	1
11	H0018	Columns	Aluminum	4
12	H0110	Bush-One Ways	Ø10 x Ø13 x 1.4mm	2
13	H0121	M4 Locking Collar		1
14	H0122	Main Shaft		1
15	H0157	Secondary Shaft		1
16	H0024	Main Shaft Bearing Support		1
17	H0038	Safety Locking Tail Boom	Carbon Fiber	1
18	H0043	Spacers Flybarless		3
19	H0050	Antenna Guide	Plastic	2
20	H0069	Tail Belt Idler		1
21	H0174	Column Belt Tensioner		1
22	H0071	Belt Tensioner Arm		1
23	H0077	Flybarless Support	Carbon Fiber	1
24	HC033	Socket Head Cap Screw Shoulderreds	M2.5 x 19mm	1
25	HC038	Button Head Cap Screws	M3 x 4mm	3
26	HC044	Socket Head Cap Screws	M3 x 6mm	5
27	HC050	Socket Head Cap Screws	M3 x 8mm	4
28	HC056	Socket Head Cap Screws	M3 x 10mm	7
29	HC062	Socket Head Cap Screw	M3 x 12mm	1
30	HC079	Socket Head Cap Screws	M3 x 18mm	1

TRANSMISSION ASSEMBLY				
POS	COD	Name	Specification	Quantity
31	HC104	Socket Head Cap Screw	M4 x 22mm	1
32	HC091	Socket Head Cap Shouldered	M4 x 40mm	1
33	HC098	Button Head Cap Screws	M4 x 8mm	4
34	HC111	Socket Head Cap Screw	M4 x 24mm	1
35	HC128	Flat Head Cap Screws	M2.5 x 5mm	3
36	HC134	Flat Head Cap Screw	M3 x 8mm	1
37	HC153	Set Screws	M4 x 6mm	1
38	HC158	Set Screws	M5 x 20mm	2
39	HC165	Vite Nylon Esa	M8 x 20mm	2
40	HC176	Washer	Ø3 x Ø4x0.5mm	1
41	HC180	Washers	Ø3.2 x Ø6 x 0.5mm	2
42	HC188	Washers	Ø5.3 x Ø15 x 1mm	2
43	HC200	Metric Hex Nylon Nuts	M2.5 H3.5mm	2
44	HC206	Metric Hex Nylon Nuts	M3 H4mm	2
45	HC212	Metric Hex Nylon Nuts	M4 H5mm	2
46	HC218	Metric Hex Nylon Nuts	M5 H4.8mm	2
48	HC309	Big Motor Belt	240-3MGT	1
32	HC091	Socket Head Cap Screw	M3 x 40mm	1
49	HC310	Springs	De 5.8-df0.3-LL9	2
50	HC312	Spring	De 8-df0.5-LL8	1
51	HC314	Springs	De 8-df0.5-LL12	2
52	HC402	Flanged Bearings	Ø3 x Ø7 x 3mm	2
53	HC410	Flanged Bearings	Ø5 x Ø9 x 3mm	2
54	HC420	Bearings	Ø10 x Ø15 x 4mm	2
55	HC422	Bearings	Ø10 x Ø19 x 5mm	2
56	HC426	Bearings	Ø12 x Ø24 x 6mm	2
57	HC442	One Way Bearing	Ø10 x Ø14 x 12mm	2
58	HC232	Washer	Ø10 x Ø16 x 0.2mm	1
59	HC414	Flanged Bearings	Ø6 x Ø13 x 5mm	1
60	H0142	Support Bearing	Aluminum	1

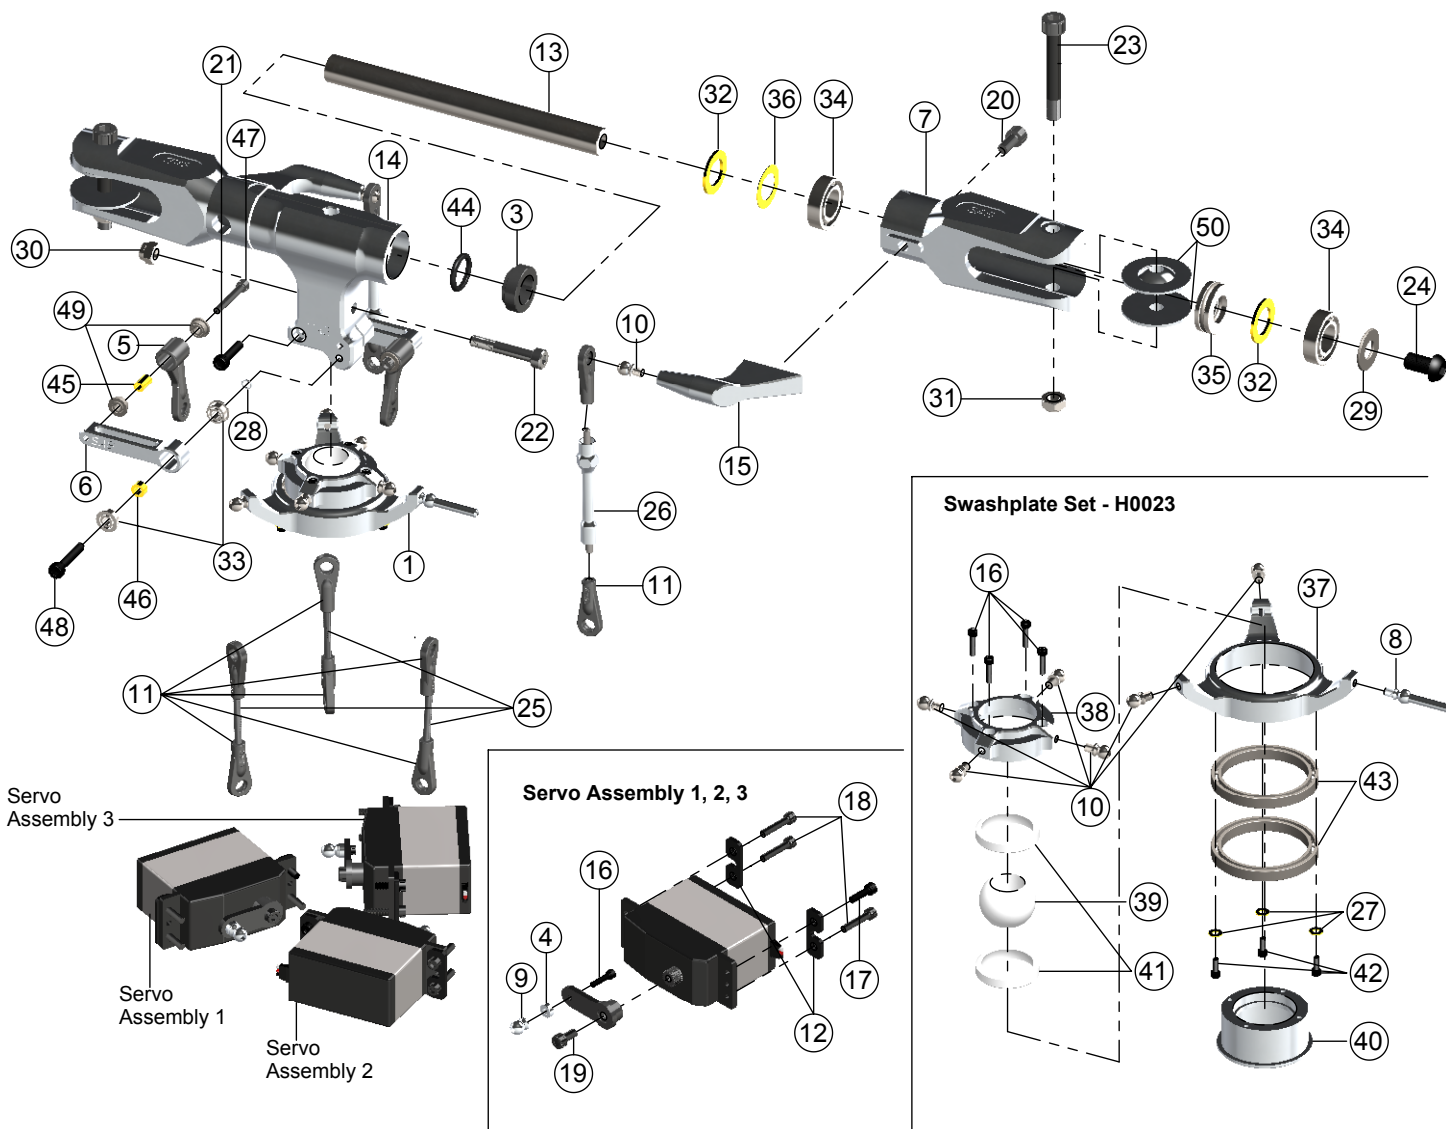

Head System				
POS	COD	Name	Specification	Quantity
1	H0023	Swashplate Set		1
3	H0144	Damper Derlin		2
4	H0031	Uniball Spacers	Aluminum	3
5	H0205	Unibal Radius Arms	Plastic	2
6	H0132	Radius Arms	Aluminum	2
7	H0182	Main Blade Grips	Aluminum	2
8	H0063	Uniball	M3 x 4 Ø5 H18	1
9	H0064	Uniballs	M2.5 Ø5 H6	3
10	H0065	Uniballs	M3 x 4 Ø5 H3	8
11	H0066	Plastic Ball Linkages	Plastic	8
12	H0075	Servo Spacers	Carbon Fiber	6
13	H0079	Spindle	Carbon Steel	1
14	H0135	Center Hub	Aluminum	1
15	H0183	Blade Grip Arms	Aluminum	2
16	HC008	Socket Head Cap Screws	M2 x 8mm	7
17	HC020	Socket Head Cap Screws	M2.5 x 8mm	3
18	HC026	Socket Head Cap Screws	M2.5 x 12mm	9
19	HC044	Socket Head Cap Screws	M3 x 6mm	3
20	HC102	Socket Head Cap Screws	M4 x 10mm	2
21	HC062	Socket Head Cap Screws	M3 x 12mm	2
22	HC111	Socket Head Cap Screw Shouldered	M4 x 24mm	1
23	HC116	Socket Head Cap Screw Shouldered	M5 x 35mm	2

Head System				
POS	COD	Name	Specification	Quantity
24	HC122	Button Head Cap Screws	M6 x 10mm	2
25	HC140	Threaded Rods	M2.5 x 18mm	3
26	H0346	Linkages Assembly		2
27	HC170	Washers	Ø2 x Ø5 x 0.5mm	3
28	HC176	Washers	Ø3 x Ø4 x 0.5mm	2
29	HC194	Washers	Ø6 x Ø14 x 1.5mm	2
30	HC212	Metric Hex Nylon Nut	M4 H5	1
31	HC218	Metric Hex Nylon Nuts	M5 H4.8	2
32	HC230	Washers	Ø10 x Ø16 x 1mm	4
33	HC402	Flanged Bearings	Ø3 x Ø7 x 3mm	4
34	HC422	Bearings	Ø10 x Ø19 x 5mm	4
35	HC438	Thrust Bearings	Ø10 x Ø18 x 5.5mm	2
36	HC232	Washers	Ø10 x Ø16 x 0.2mm	2
42	HC002	Socket Head Cap Screws	M2 x 5mm	3
43	HC430	Bearing Rads	Ø30 x Ø37 x 4mm	2
44	HA024	Oring	3050	2
45	H0235	Spacer Arm	Ø2.5 x Ø4 x 6.3mm	2
46	H0134	Spacer Arm	Ø3 x Ø5 x 2.7mm	2
47	HC032	Socket Head Cap Screws	M2.5 x 18mm	2
48	HC068	Socket Head Cap Screws	M3 x 16mm	2
49	HC400	Flanged Bearings	Ø2.5 x Ø6 x 2.5mm	4
50	H0158	Blade Washers	Ø5 x Ø24 x 1mm	4

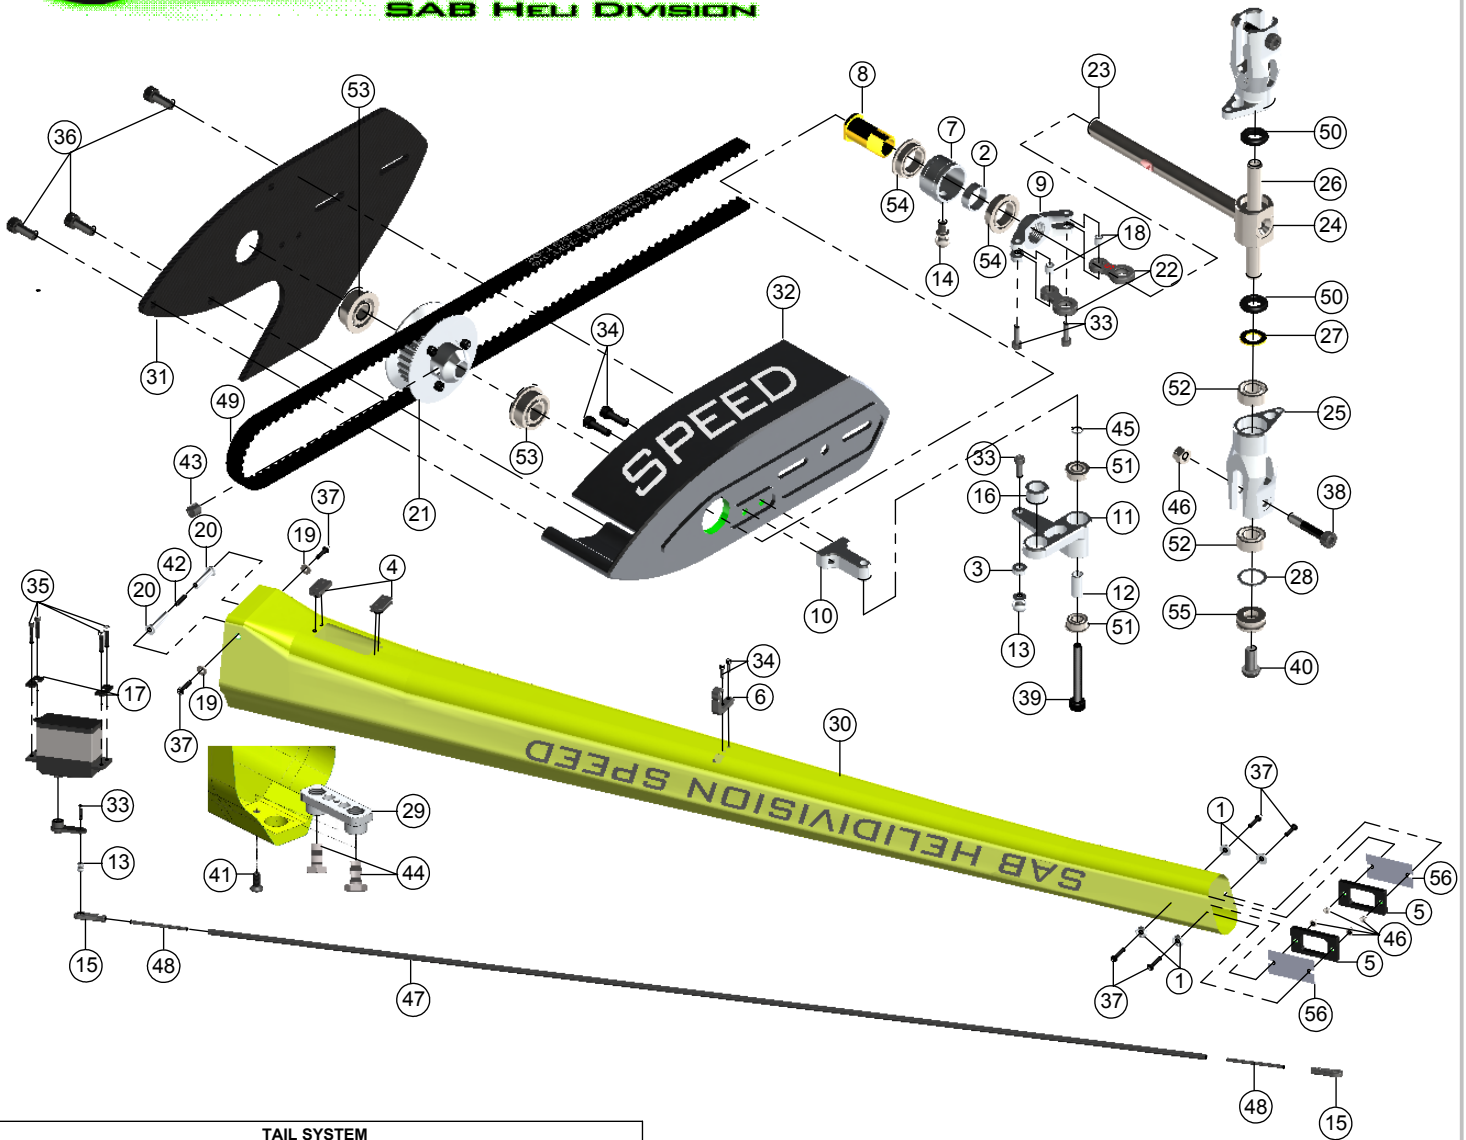

TAIL SYSTEM				
POS	COD	Name	Specification	Quantity
1	H0007	Finishing Washer M3	Aluminum	4
2	H0029	Spacer	Ø8.1 x Ø9.2 x 3.2mm	1
3	H0031	Uniball Spacer		1
4	H0040	Tail Servo Locks	Plastic	2
5	H0041	Locking Element Tails	Carbon Fiber	2
6	H0045	Linkage Tail Support	Plastic	1
7	H0053	Tail pitch slider 01	Aluminum	1
8	H0054	Tail pitch slider 02	Aluminum	1
9	H0055	Tail pitch slider 03	Aluminum	1
10	H0058	Bell crank base	Aluminum	1
11	H0059	Bell crank lever	Aluminum	1
12	H0060	Spacer	Ø3 x Ø4 x 9.6mm	1
13	H0064	Uniballs	M2.5 Ø5h6	2
14	H0065	Uniballs	M3x4 Ø5h3	1
15	H0066	Plastic ball links	Plastic	2
16	H0072	Bush bell crank	Aluminum	1
17	H0075	Servo spacer	Carbon fiber	2
18	H0076	Grip link bushes	Aluminum	2
19	H0078	Washers	Ø3.1 x Ø12 x 1.8mm	2
20	H0082	Boom spacers		2
21	H0102	Tail pulley	27t	1
22	H0261	Tail pitch slider link	Plastic	2
23	H0325	Tail rotor shaft		1
24	H0326	Tail rotor hub		1
25	H0327	Tail blade grip		2
26	H0329	Tail spindle		1
27	H0330	Washer	Spacer Ø5x Ø9x0.75mm	2
28	H0349	Washer	Spacer Ø7.5x Ø10x0.5mm	2
29	H0358	Block Nut		1

TAIL SYSTEM				
POS	COD	Name	Specification	Quantity
30	H0366	Yellow Tail Boom		1
	H0383	Orange Tail Boom		
31	H0371	Vertical Fin		1
32	H0373	Tail Side Plate	Aluminum	1
34	HC020	Socket Head Cap Screws	M2.5 x 8mm	4
35	HC026	Socket Head Cap Screws	M2.5 x 12mm	4
36	HC050	Socket Head Cap Screws	M3 x 8mm	3
37	HC062	Socket Head Cap Screws	M3 x 12mm	6
38	HC079	Socket Head Cap Screws Shouldered	M3 x 18mm	2
39	HC086	Socket Head Cap Screws	M3 x 22mm	1
40	HC096	Button Head Cap Screws	M4 x 6mm	2
41	HC134	Flat Head Cap Screws	M3x8mm	1
42	HC150	Set Screws	M3 x 20mm	1
43	HC153	Set Screws	M4 x 6mm	1
44	HC165	Nylon Screw	M8x20mm	2
45	HC176	Washer		1
46	HC206	Metric Hex Nylon Nuts	M3	6
47	HC239	Carbon Rod	Ø2.5 x Ø4 x 702mm	1
48	HC242	Threaded Rods	M2.5 x 40mm	2
49	HC304	Belt Gates	2061-3GT-06	1
50	HC335	Oring	Rubber	2
51	HC402	Flanged Bearings	Ø3 x Ø7 x 3mm	2
52	HC411	Bearings	Ø5x Ø10x4mm	4
53	HC414	Flanged Bearings	Ø6 x Ø13 x 5mm	2
54	HC418	Flanged Bearings	Ø8 x Ø12 x 3.5mm	2
55	HC435	Thrust Bearings	Ø5x Ø10x4mm	2
56	HA015	Double-sided tapes		2



<p>Battery Tray [H0002-S]</p>  <ul style="list-style-type: none"> - 1 x CF Battery Tray. - 6 x Flat Head Cap Screws M2.5x5mm. 	<p>Frame Spacer [H0003-S]</p>  <ul style="list-style-type: none"> - 3 x Frame Spacers. 	<p>Finishing Washer M3 [H0007-S]</p>  <ul style="list-style-type: none"> - 10 x Finishing Washers M3. 	<p>Main Structure [H0009-S]</p>  <ul style="list-style-type: none"> - 1 x Main Structure.
<p>Servo Support [H0010-S]</p>  <ul style="list-style-type: none"> - 1 x Servo Support. 	<p>Swashplate Anti-Rotation Guide [H0017-S]</p>  <ul style="list-style-type: none"> - 1 x CF Swashplate Anti-Rotation Guide. - 1 x Finishing Washer M3. - 1 x Socket Head Cap Screw M3x8mm. 	<p>Column [H0018-S]</p>  <ul style="list-style-type: none"> - 4 x Columns. 	<p>Swashplate [H0023-S]</p>  <ul style="list-style-type: none"> - 1 x Swashplate Assembly. - 2 x Bearings 30x Ø37x4mm. - 4 x Uniballs M3x4 Ø5 H3. - 1 x Uniball M3x4 Ø5 H18. - 3 x Socket Head Cap Screws M2x5mm. - 4 x Socket Head Cap Screws M2x8mm.
<p>Bearing Support [H0024-S]</p>  <ul style="list-style-type: none"> - 1 x Bearing Support. - 1 x Bearing Ø12x Ø24x6mm. - 3 x Flat Head Cap Screws M2.5x5mm. 	<p>Safety Lock Tail Boom [H0038-S]</p>  <ul style="list-style-type: none"> - 1 x Safety Lock Tail Boom. - 1 x Finishing Washer M3. - 1 x Socket Head Cap Screw M3x8mm. 	<p>Tail Servo Lock [H0040-S]</p>  <ul style="list-style-type: none"> - 2 x Tail Servo Locks. - 2 x Servo Spacers. - 4 x Socket Head Cap Screws M2.5x12mm. 	<p>Locking Element Tail [H0041-S]</p>  <ul style="list-style-type: none"> - 2 x Locking Element Tails. - 4 x Metric Hex Nylon Nuts M3. - 2 x Double Sided Tapes.
<p>Spacer Flybarless [H0043-S]</p>  <ul style="list-style-type: none"> - 3 x Spacer Flybarless. - 1 x Supporto Flybarless. - 1 x Flat Head Cap Screw M3x8mm. - 5 x Socket Head Cap Screws M3x6mm. 	<p>Linkage Tail Support [H0045-S]</p>  <ul style="list-style-type: none"> - 1 x Linkage Tail Support. - 2 x Socket Head Cap Screws M2.5x6mm. 	<p>Antenna Guide [H0050-S]</p>  <ul style="list-style-type: none"> - 2 x Antenna Guide. - 2 x Button Head Cap Screws M3x4mm. 	<p>Tail Pitch Slider [H0053-S]</p>  <ul style="list-style-type: none"> - 1 x Tail Pitch Slider 01. - 1 x Tail Pitch Slider 02. - 1 x Tail Pitch Slider 03. - 1 x Spacer Ø8x Ø9x3.2mm. - 1 x Uniball M3x4 Ø5H3. - 2 x Flanged Bearings Ø8x Ø12x3.5mm
<p>Bell Crank Base [H0058-S]</p>  <ul style="list-style-type: none"> - 1 x Bell Crank Base. 	<p>Bell Crank Lever [H0059-S]</p>  <ul style="list-style-type: none"> - 1 x Bell Crank Lever. - 1 x Bush Bell Crank. - 1 x Washer Ø3x Ø4x0.5mm. - 1 x Spacer Ø3x Ø4x9.6mm. - 1 x Socket Head Cap Screw M3x22mm. - 2 x Flanged Bearings Ø3x Ø7x3mm. 	<p>Uniball M3x4 Ø5H18 [H0063-S]</p>  <ul style="list-style-type: none"> - 1 x Uniball M3x4 Ø5H18 	<p>Uniball M2 Ø5H6 [H0064-S]</p>  <ul style="list-style-type: none"> - 5 x Uniballs M2 Ø5H6. - 5 x Uniball Spacers. - 5 x Socket Head Cap Screws M2x8mm. - 5 x Socket Head Cap Screws M2x6mm.







































<p>Uniball M3x4 \varnothing 5H3 [H0065-S]</p>  <p>- 5 x Uniballs M3x4 \varnothing 5H3.5.</p>	<p>Plastic Ball Link [H0066-S]</p>  <p>10 x Plastic Ball Link</p>	<p>Servo Spacer [H0075-S]</p>  <p>-10 x Servo Spacers.</p>	<p>Washer \varnothing 3.1x \varnothing 12x1.8mm [H0078-S]</p>  <p>- 10 x Washers \varnothing 3.1x \varnothing 12x1.8mm.</p>
<p>Spindle [H0079-S]</p>  <p>- 1 x Spindle. - 2 x Button Head Cap Screw M6x10mm. - 2 x Washer \varnothing 6x \varnothing 14x1.5mm</p>	<p>Boom Spacer [H0082-S]</p>  <p>- 2 x Boom Spacer. - 1 x Set Screw M3x20mm</p>	<p>27T Tail Pulley [H0102-S]</p>  <p>- 1 x 27T Tail Pulley. - 1 x Set Screw M4x4mm. - 6 x Socket Head Cap Screws M2x5mm.</p>	<p>Bush One Way [H0110-S]</p>  <p>- 4 x Bush One Ways.</p>
<p>M4 Locking Collar [H0121-S]</p>  <p>- 1 x M4 Locking Collar. - 1 x Socket Head Cap Screw M4x22mm. - 1 x Metric Hex Nylon Nut M4 H5.</p>	<p>Main Shaft [H0122-S]</p>  <p>- 1 x Main Shaft. - 1 x M4 Locking Collar - 1 x Socket Head Cap Screw Shouldered M4x24mm. - 2 x Socket Head Cap Screws M4x22mm. - 3 x Metric Hex Nylon Nuts M4 H5.</p>	<p>Radius Arm [H0132-S]</p>  <p>-2 x Radius Arms. -2 x Spacer Arm \varnothing 3x \varnothing 5x2.7mm. -2 x Spacer Arm \varnothing 2.5x \varnothing 4x6.3mm. -2 x Uniball Radius Arms. -2 x Socket Head Cap Screws M3x16mm. -2 x Socket Head Cap Screws M2.5x18mm. -2 x Washers \varnothing 3x \varnothing 4x0.5mm. -2 x Flanged Bearings \varnothing 2.5x \varnothing 6x2.5mm. -2 x Flanged Bearings \varnothing 3x \varnothing 7x3mm.</p>	<p>Center Hub [H0135-S]</p>  <p>- 1 x Center Hub. - 1 x Socket Head Cap Screw Shouldered M4x24mm. - 1 x Metric Hex Nylon Nut M4 H5. - 2 x Socket Head Cap Screws M3x12mm.</p>
<p>Bearing Support [H0142-S]</p>  <p>- 1 x Bearing 3° Support. - 1 x Flanged Bearing \varnothing 6x \varnothing 13x5mm. - 2 x Socket Head Cap Screws M3x8mm.</p>	<p>Damper [H0144-S]</p>  <p>-2 x Damper Derlin. -2 x Washers \varnothing 10x \varnothing 16x1mm. -4 x Washers \varnothing 10x \varnothing 16x0.2mm. -4 x Orings 3050.</p>	<p>Battery Tray [H0149-S]</p>  <p>- 1 x Battery Plate. - 1 x Battery Protection. - 2 x Cylinder M2.5. - 2 x Flat Head Cap Screw M2.5x5mm - 1 x Heat Shrink.</p>	<p>Stop Battery Tray [H0150-S]</p>  <p>- 1 x Stop Battery Tray. - 2 x Socket Head Cap Screw M2.5x8mm.</p>
<p>Carbon Fiber ESC Support [H0153-S]</p>  <p>- 1 x Carbon Fiber ESC Support. - 6 x Flat Head Socket Cap M2,5x5mm.</p>	<p>Secondary Shaft [H0157-S]</p>  <p>- 1 x Secondary Shaft M3. - 1 x Socket Head Cap Screw Shoulder M2.5x19mm. - 1 x Metric Hex Nylon Nut M2,5H3,5. - 1 x Socket Head Cap Shoulder M3x22mm. - 1 x Metric Hex locknut Nuts M3H4.</p>	<p>Aluminum Blade Spacer [H0158-S]</p>  <p>- 4 x Aluminum Blade Spacer</p>	<p>Double Bearing One Way Pulley [H0171-S]</p>  <p>- 1 x Aluminum Double Bearing One Way Pulley. - 3 x Shims \varnothing 10x \varnothing 16x0,2mm. - 1 x One Way Brass Bushing.</p>

<p>Aluminum Front Tail Pulley [H0172-S]</p>  <ul style="list-style-type: none"> - 1 x Aluminum Front Tail Pulley. - 1 x Socket Head Cap M2.5x19mm. - 1 x Metric Hex Nylon Nuts M2,5H3,5. 	<p>Belt Tensioner Support [H0174-S]</p>  <ul style="list-style-type: none"> - 1 x Column Belt Tensioner. - 1 x Tail Belt Idler. - 1 x Belt Tensioner Arm. - 2 x Flanged Bearings $\varnothing 3x\varnothing 7x3mm$. - 2 x Flanged Bearings $\varnothing 5x\varnothing 9x3mm$. - 1 x Socket Head Cap Screw M3x50mm. - 1 x Washer $\varnothing 3x\varnothing 4x0.5mm$. - 1 x Socket Head Cap Screw M3x12mm. - 2 x Washers $\varnothing 3.2x\varnothing 6x0.5mm$. - 1 x Button Head Cap Screw M3x4mm. - 1 x Spring De8/df0.5/LL8. 	<p>18T Pulley [H0175-18-S]</p>  <ul style="list-style-type: none"> - 1 x 18T Pulley. - 1 x Set Screws M4x4mm. 	
<p>19T Pulley [H0175-19-S]</p>  <ul style="list-style-type: none"> - 1 x 19T Pulley. - 1 x Set Screws M4x4mm. 	<p>20T Pulley [H0175-20-S]</p>  <ul style="list-style-type: none"> - 1 x 20T Pulley. - 1 x Set Screws M4x4mm. 	<p>21T Pulley [H0175-21-S]</p>  <ul style="list-style-type: none"> - 1 x 21T Pulley. - 1 x Set Screws M4x4mm. 	<p>22T Pulley [H0175-22-S]</p>  <ul style="list-style-type: none"> - 1 x 22T Pulley. - 1 x Set Screws M4x4mm.
<p>23T Pulley [H0175-23-S]</p>  <ul style="list-style-type: none"> - 1 x 23T Pulley. - 1 x Set Screws M4x4mm. 	<p>24T Pulley [H0175-24-S]</p>  <ul style="list-style-type: none"> - 1 x 24T Pulley. - 1 x Set Screws M4x4mm. 	<p>Blade Grip [H0182-S]</p>  <ul style="list-style-type: none"> - 2 x Blade Grip. - 2 x Thrust Bearing $\varnothing 10x\varnothing 18x5.5mm$. - 4 x Bearing $\varnothing 10x\varnothing 19x5mm$. - 2 x Washer $\varnothing 10x\varnothing 16x1mm$. - 2 x Button Head Socket Cap M4x10mm. 	<p>Blade Grip Arm [H0183-S]</p>  <ul style="list-style-type: none"> - 2 x Blade Grip Arm. - 2 x Socket Head Cap Screw M4x10mm. - 2 x Uniball M3x4 $\varnothing 5$ H3.5.
<p>Plastic Tail Linkage [H0261-S]</p>  <ul style="list-style-type: none"> - 1 x Plastic Tail Linkage. - 1 x Grip Link Bushing. - 1 x Socket Head Cap Screws M2x6mm. 	<p>Motor Mount Cooling [H0316-S]</p>  <ul style="list-style-type: none"> - 1 x Bearing 3° Support. - 1 x Motor Support. - 1 x Flanged Bearing $\varnothing 6x\varnothing 13x5mm$. - 2 x Socket Head Cap Screws M3x8mm. - 2 x Set Screws M5x20mm. - 2 x Washers $\varnothing 5.3x\varnothing 15x1mm$. - 2 x Metric Hex Nylon Nuts M5H4.8. - 2 x Finishing Washers M3. - 2 x Socket Head Cap Screws M3x10mm. - 2 x Metric Hex Nylon Nut M3 H4. - 2 x Springs de 5.8/ df0.5 / LL9. - 2 x Springs de 3/ df0.5 / LL12. 		
<p>68T Main Gear [H0320-S]</p>  <ul style="list-style-type: none"> - 1 x 68T Main Gear . - 1 x Socket Head Cap Screw M4x25mm. - 1 x Metric Hex Nylon Nut M4 H5. - 1 x 19T Drive Pinion. - 1 x Socket Head Cap Screw Shouldered M3x22mm. - 1 x Metric Hex Nylon Nut M3H4. 	<p>Steel Tail Shaft [H0325-S]</p>  <ul style="list-style-type: none"> - 1 x Steel Tail Shaft Assembly. - 1 x Tail Oring Damperner. 	<p>Aluminum Tail Blade Grip [H0327-S]</p>  <ul style="list-style-type: none"> - 2 x Aluminum Tail Blade Grip. - 4 x Bearing $\varnothing 5x\varnothing 10x4mm$. - 2 x Thrust bearing $\varnothing 5x\varnothing 10x4mm$. - 2 x Button Head Cap M4x8mm. - 2 x Socket Head Cap M2x6mm. - 2 x Washer $\varnothing 5x\varnothing 8.9x0.75mm$. - 2 x Washer $\varnothing 7.5x\varnothing 10x0.5mm$. 	



<p>Tail Spilde Shaft [H0329-S]</p>  <ul style="list-style-type: none"> - 1 x Tail Spilde Shaft. - 2 x Button Head Socket Cap Screw M4x6mm. 	<p>Spacer Set For Tail Rotor [H0330-S]</p>  <ul style="list-style-type: none"> - 2 x Washer $\varnothing 5 \times \varnothing 8.9 \times 0.75 \text{mm}$. - 2 x Washer $\varnothing 7.5 \times \varnothing 10 \times 0.5 \text{mm}$. - 2 x Tail Oring Dampener. 	<p>Linkage HPS V2 [H0346-S]</p>  <ul style="list-style-type: none"> - 2 x Linkage HPS. - 4 x Plastic Ball Link. - 2 x Linkage Rod. 	<p>Main Frame [H0354-S]</p>  <p>1 x Main Frame</p>	<p>Tail Boom Support [H0358-S]</p>  <ul style="list-style-type: none"> - 1 x Tail Boom Support. - 1 x Nylon screw M8x20mm. - 1 x Flat Head Socket Cap M3x8mm.
<p>19T Drive Pinion [H0361-S]</p>  <ul style="list-style-type: none"> - 1 x 19T Drive Pinion. - 1 x Socket Head Cap Screw Shouldered M3x22mm. - 1 x Metric Hex Nylon Nut M3H4. 	<p>YELLOW Tail Boom [H0366-S]</p>  <ul style="list-style-type: none"> - 1 x Yellow Tail Boom. - 2 x Locking Element Tails. - 2 x Double-Sided Tapes. - 1 x Set Screws M3 x 20mm. - 2 x Washers 3.1 x 12 x 1.8mm. - 4 x Metric Hex Nylon Nuts M3. - 2 x Boom spacers. - 2 x Socket Head Cap Screws M3 x 12mm. - 2 x Nylon Screw M8x20mm. - 1 x Flat Head Cap Screws M3x8mm. 		<p>Yellow Canopy Speed [H0367-S]</p>  <ul style="list-style-type: none"> - 1 x Canopy Yellow. - 2 x Canopy Grommet. - 1 x Canopy Mousse. - 1 x Canopy Edge Protection. 	
<p>Vertical ESC Support [H0368-S]</p>  <ul style="list-style-type: none"> - 2 x Vertical ESC Support. - 1 x ESC Support. - 2 x Frame Spacer. - 4 x Flat Head Socket Cap M3x5mm. - 6 x Finishing Washer M3. - 6 x Socket Head Cap Screws M3 x 10mm. - 2 x Flat Head Cap Screws M3x8mm. 	<p>Vertical Fin [H0371-S]</p>  <ul style="list-style-type: none"> - 1 x Vertical Fin. - 1 x Small Vertical Fin. - 6 x Socket Head Cap M3x8mm. - 2 x Finishing Washer M3. - 2 x Socket Head Cap M3x12mm. - 1 x Yellow and Orange Stickers. 	<p>Tail Side Plate [H0373-S]</p>  <ul style="list-style-type: none"> - 1 x Tail Side Plate. - 2 x Finishing Washer M3. - 2 x Socket Head Cap M3x12mm. 		
<p>Landing Gear Support [H0374-S]</p>  <p>- 1 x Landing Gear Support</p>	<p>Yellow Landing Gear [H0375-S]</p>  <ul style="list-style-type: none"> - 1 x Landing Gear. - 2 x Bottom Head Cap Screw M4x8mm. - 2 x Bottom Head Cap Screw M4x10mm. - 1 x Yellow and Orange Stickers. 	<p>Canopy Locking [H0378-S]</p>  <ul style="list-style-type: none"> - 2 x Canopy Locking. - 2 x Button Head Socket Cap M4x8mm. 	<p>Safety Landing Gear [H0379-S]</p>  <ul style="list-style-type: none"> - 1 x Landing Gear. - 2 x Bottom Head Cap Screw M4x8mm. - 2 x Bottom Head Cap Screw M4x10mm. - 1 x Yellow and Orange Stickers. 	
<p>Orange Canopy Speed [H0382-S]</p>  <ul style="list-style-type: none"> - 1 x Canopy Orange. - 2 x Canopy Grommet. - 1 x Canopy Mousse. - 1 x Canopy Edge Protection. 	<p>Orange Tail Boom [H0383-S]</p>  <ul style="list-style-type: none"> - 1 x Orange Tail Boom. - 2 x Locking Element Tails. - 2 x Double-Sided Tapes. - 1 x Set Screws M3 x 20mm. - 2 x Washers 3.1 x 12 x 1.8mm. - 4 x Metric Hex Nylon Nuts M3. - 2 x Boom spacers. - 2 x Socket Head Cap Screws M3 x 12mm. - 2 x Nylon Screw M8x20mm. - 1 x Flat Head Cap Screws M3x8mm. 			

<p>[HC002-S]</p>  <p>- 5 x Socket Head Cap Screws M2x5mm.</p>	<p>[HC004-S]</p>  <p>- 5 x Socket Head Cap Screws M2x6mm.</p>	<p>[HC008-S]</p>  <p>- 5 x Socket Head Cap Screws M2x8mm.</p>	<p>[HC010-S]</p>  <p>- 5 x Socket Head Cap Screws M2x10mm.</p>	<p>[HC018-S]</p>  <p>- 5 x Socket Head Cap Screws M2.5x6mm.</p>	<p>[HC020-S]</p>  <p>- 5 x Socket Head Cap Screws M2.5x8mm.</p>
<p>[HC026-S]</p>  <p>- 5 x Socket Head Cap Screw M2.5x12mm.</p>	<p>[HC033-S]</p>  <p>- 4 x Socket Head Cap shoulder M2.5x19mm. - 4 x Metrix Hex Nylon Nut M2.5.</p>	<p>[HC038-S]</p>  <p>- 5 x Button Head Cap Screws M3x4mm.</p>	<p>[HC044-S]</p>  <p>- 5 x Socket Head Cap Screws M3x6mm.</p>	<p>[HC050-S]</p>  <p>- 5 x Socket Head Cap Screws M3x8mm.</p>	<p>[HC056-S]</p>  <p>- 5 x Socket Head Cap Screws M3x10mm.</p>
<p>[HC062-S]</p>  <p>- 5 x Socket Head Cap Screws M3x12mm.</p>	<p>[HC068-S]</p>  <p>- 5 x Socket Head Cap Screws M3x16mm.</p>	<p>[HC079-S]</p>  <p>- 5 x Socket Head Cap Shoulder M3x18mm.</p>	<p>[HC086-S]</p>  <p>- 5 x Socket Head Cap Screws M3x22mm.</p>	<p>[HC091-S]</p>  <p>- 2 x Socket Head Cap Shoulders M3x40mm.</p>	<p>[HC096-S]</p>  <p>- 5 x Button Head Cap Screws M4x6mm.</p>
<p>[HC098-S]</p>  <p>- 5 x Button Head Cap Screws M4x8mm.</p>	<p>[HC100-S]</p>  <p>- 5 x Button Head Cap Screws M4x10mm.</p>	<p>[HC102-S]</p>  <p>- 5 x Socket Head Cap Screws M4x10mm.</p>	<p>[HC104-S]</p>  <p>- 5 x Socket Head Cap Screws M4x22mm.</p>	<p>[HC111-S]</p>  <p>- 2 x Socket Head Cap Shoulder M5x30mm. - 2 x Metrix Hex Nut M5.</p>	<p>[HC116-S]</p>  <p>- 2 x Socket Head Cap Shoulder M5x35mm. - 2 x Metrix Hex Nut M5.</p>
<p>[HC122-S]</p>  <p>- 5 x Button Head Cap Screws M6x10mm.</p>	<p>[HC128-S]</p>  <p>- 5 x Flat Head Cap Screws M2.5x5mm.</p>	<p>[HC134-S]</p>  <p>- 5 x Flat Head Cap Screws M3x8mm.</p>	<p>[HC140-S]</p>  <p>- 5 x Cup Point Set Screws M2.5x20mm.</p>	<p>[HC150-S]</p>  <p>- 5 x Cup Point Set Screws M3x20mm.</p>	<p>[HC152-S]</p>  <p>- 5 x Cup Point Set Screws M4x4mm.</p>
<p>[HC153-S]</p>  <p>- 5 x Cup Point Set Screws M4x6mm.</p>	<p>[HC170-S]</p>  <p>- 10 x Washer Ø2,2xØ5x0,3mm.</p>	<p>[HC176-S]</p>  <p>- 5 x Washer Ø3xØ4x0,5mm.</p>	<p>[HC180-S]</p>  <p>- 10 x Washer Ø3.3xØ6x0,5mm.</p>	<p>[HC188-S]</p>  <p>- 5 x Washer Ø5.3xØ15x1mm.</p>	<p>[HC194-S]</p>  <p>- 5 x Washer Ø6.3xØ15x1mm.</p>



<p>[HC200-S]</p>  <p>- 10 x Metric Hex Nylon Nuts M2,5H3,5.</p>	<p>[HC206-S]</p>  <p>- 10 x Metric Hex Nylon Nuts M3H4.</p>	<p>[HC212-S]</p>  <p>- 10 x Metric Hex Nylon Nuts M4H5.</p>	<p>[HC218-S]</p>  <p>- 5 x Metric Hex Nylon Nuts M5H4.5.</p>	
<p>[HC230-S]</p>  <p>- 5 x Shims Ø10xØ16x1mm.</p>	<p>[HC232-S]</p>  <p>- 5 x Shims Ø10xØ16x0.2mm.</p>	<p>[HC239-S]</p>  <p>- 1 x Carbon Rod Ø4xØ2,5x702mm. - 2 x Plastic Ball Linkage. - 2 x Thread Rod M2.5x40mm.</p>	<p>[HC242-S]</p>  <p>- 3 X Thread Rods M2.5 x 40mm.</p>	<p>[HC304-S]</p>  <p>- 1 x Main Belt.</p>
<p>[HC309-S]</p>  <p>- 1 x Motor Belt 240-3MGT 19mm.</p>	<p>[HC315-S]</p>  <p>- 2 x Spring 5,8/df 0,3/LL 9. - 1 x Spring 8 /df 0,5 / LL 8. - 2 x Spring 3 /df 5 / LL 12.</p>	<p>[HC335-S]</p>  <p>- 4 x Tail Oring Dampener.</p>	<p>[HC400-S]</p>  <p>- 4 x Flanged Bearings Ø2.5x Ø6x2.6mm.</p>	<p>[HC402-S]</p>  <p>- 4 x Flanged Bearings Ø3x Ø7x3mm.</p>
<p>[HC410-S]</p>  <p>- 4 x Flanged Bearings Ø5x Ø9x3mm.</p>	<p>[HC411-S]</p>  <p>- 4 x Bearings Ø5x Ø10x4mm.</p>	<p>[HC414-S]</p>  <p>- 2 x Flanged Bearings Ø6x Ø13x4mm.</p>	<p>[HC418-S]</p>  <p>- 2 x Flanged Bearings Ø8x Ø12x3.5mm.</p>	<p>[HC420-S]</p>  <p>- 2 x Bearings Ø10x Ø15x4mm.</p>
<p>[HC422-S]</p>  <p>- 4 x Bearings Ø10x Ø19x5mm.</p>	<p>[HC426-S]</p>  <p>- 2 x Bearings Ø12x Ø24x6mm.</p>	<p>[HC430-S]</p>  <p>- 2 x Rad Bearings Ø30x Ø37x4mm.</p>	<p>[HC435-S]</p>  <p>- 2 x Thrust Bearings Ø5x Ø10x4mm.</p>	<p>[HC438-S]</p>  <p>- 2 x Thrust Bearings Ø10x Ø18x5.5mm.</p>
<p>[HC442-S]</p>  <p>- 1 x One Way Bearings Ø10x Ø14x12mm.</p>	<p>[HA001-S]</p>  <p>- 1 x Foam Blade Holder</p>	<p>[HA002-S]</p>  <p>- 2 x Hex Wrenches 2,5.</p>	<p>[HA006-S]</p>  <p>- 1 x Canopy Mousse.</p>	<p>[HA010-S]</p>  <p>- 2 x Cable Pass.</p>



<p>[HA016-S]</p>  <p>- 2 x Wrench Tool M8,M6.</p>	<p>[HA024-S]</p>  <p>- 4 x O-ring 3050.</p>	<p>[HA025-S]</p>  <p>- 2 x Velcro Battery Strap.</p>	<p>[HA026-S]</p>  <p>- 8 x Heat Shrink - Clear.</p>	<p>[HA112-S]</p>  <p>- 1 x Rubber Canopy Edge Protection.</p>	<p>[BW2720-G]</p>  <p>[BW5104-G]</p> 
---	--	---	---	--	---

UPGRADES and ACCESSORIES

<p>[BW4690] Main Blade For 3D Flight</p> 	<p>Aluminum ESC Heat Sink [H0165-S]</p>  <ul style="list-style-type: none"> - 1 x Aluminum ESC Heat Sink. - 4 x Socket Head Cap M3x6mm. - 4 x Cup Point Set Screws M3X20mm. - 12 x Washer Ø3,3xØ6x0,5mm. - 4 x Metric hex locknut Nuts M3H4.
<p>[BW5115] Tail Blade For 3D Flight</p> 	

<p>SAB HELIDIVISION Futaba Servo Horn [HA050]</p>  <p>- 1 x Plastic Servo Horn.</p>	<p>SAB HELIDIVISION JR Servo Horn [HA050]</p>  <p>- 4 x JR Servo Horn.</p>	<p>SAB HELI DIVISION New Black T-shirt [HM025-S-M-L-XL-XXL]</p>  <p>- SAB HELI DIVISION New Black T-shirt.</p>
--	---	---

<p>SAB HELI DIVISION Black Polo Shirt [HM027-S-M-L-XL-XXL]</p>  <p>- SAB HELI DIVISION Black Polo Shirt.</p>	<p>SAB HELI DIVISION Black Hoodies [HM029-S-M-L-XL-XXL]</p>  <p>- SAB HELI DIVISION Black Hoodies.</p>	<p>SAB HELI DIVISION Neck Strap [HM034]</p>  <p>- 1 x Neck Strap.</p>
---	--	--

<p>SAB HELI DIVISION Decal [HM035]</p>  <p>- 1 x SAB HELI DIVISION Decal (set).</p>	<p>SAB HELI DIVISION Keychain [HM037]</p>  <p>- 1 x SAB HELI DIVISION Keychain.</p>	<p>SAB HELI DIVISION Stand [HM038]</p>  <p>- 1 x SAB HELI DIVISION Stand (Set).</p>
--	---	--

WWW.GOBLIN-HELICOPTER.COM

SAB HELI DIVISION